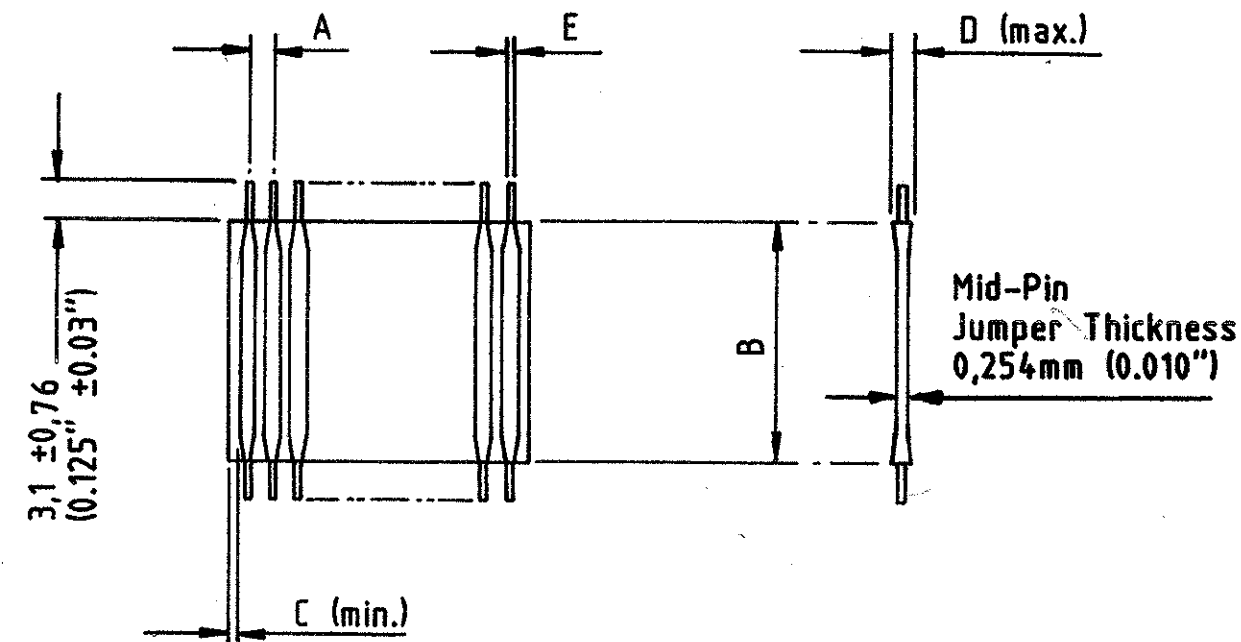


2/86

INSULATION LENGTH B ± 1.57 ($\pm 0.062''$)		
mm	(inch)	Cat. Ref.
25.4	1	1
38.1	1½	1.5
50.8	2	2
63.5	2½	2.5
76.2	3	3
88.9	3½	3.5
101.6	4	4
114.3	4½	4.5
127	5	5
139.7	5½	5.5
152.4	6	6

Insulation Material - Nomex#
Temperature Rating - 105°C
Current Rating - 2 amps
U.L. Style Number - 5188

NOTES:-
 * Trademark of Thomas & Betts Corporation
 * Registered trademark of E.I. Du Pont de Nemours

FSN-XXA-X

Product Code

Number of Conductors
(see table for max' number)

Conductor Pitch
(see table for ref' N°)

Straight Pin


Insulation Length
(see table for ref' N°)

FSN -22A - 15

FSN - Flexstrip Jumper With Nomex Insulation
2 - Conductor Pitch 2.54 (0.100)
2 - Insulation Length 50.8 (2)
A - Straight Pin
15 - Number of Conductors 15

DRG. N°
35-10018

IMPERIAL DIMENSIONS
SHOWN THUS []
TOLERANCES
·0000 EQUALS $\pm$ ·0002
·000 EQUALS $\pm$ ·003
·00 EQUALS $\pm$ ·015



THIRD ANGLE PROJECTION

						MATERIAL	PART NAME	
						HEAT TREAT		
						FINISH	PRODUCT CODE	TOLERANCES UNLESS OTHERWISE SPECIFIED 0.005 DIMS ± 0.005
						SCALE		
						DR.	FSH-11A-20	
						CH.	=	
						APP.		
0						tyco 1-1437130-9		
						Electronics REV 0 SHT 1 of 1		
REV	DESCRIPTION				DATE	BY		