



AS85049/27 and M38999/1 Self-Locking and Non-Self-Locking E-Nut



AS85049

B

CONNECTOR DESIGNATOR:	
F	MIL-DTL-27599, MIL-DTL-38999 Series I & II

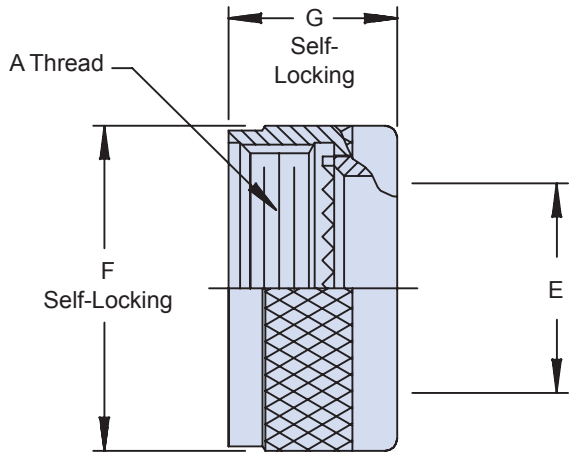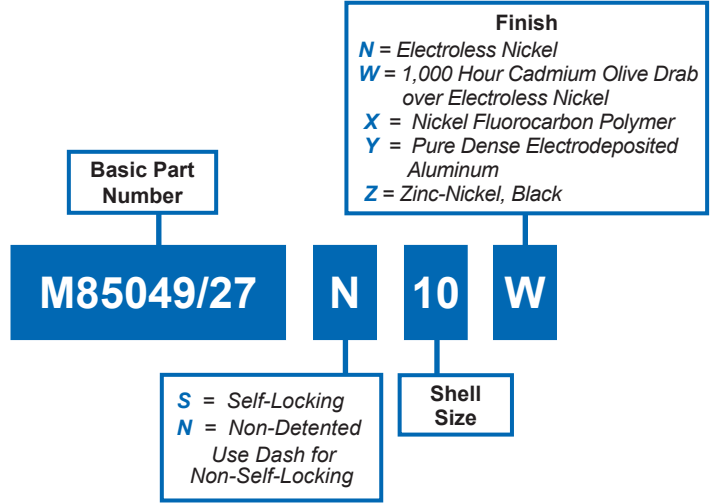

Shell Size	A Thread Class 2B	Ø E Max	Ø F Max	G Max
08	.438 - 28 UNEF	.274 (7.0)	.859 (21.8)	.590 (15.0)
10	.562 - 24 UNEF	.412 (10.5)	.984 (25.0)	.590 (15.0)
12	.688 - 24 UNEF	.526 (13.4)	1.156 (29.4)	.590 (15.0)
14	.813 - 20 UNEF	.651 (16.5)	1.281 (32.5)	.590 (15.0)
16	.938 - 20 UNEF	.776 (19.7)	1.406 (35.7)	.590 (15.0)
18	1.063 - 18 UNEF	.882 (22.4)	1.516 (38.5)	.590 (15.0)
20	1.188 - 18 UNEF	1.006 (25.6)	1.641 (41.7)	.590 (15.0)
22	1.313 - 18 UNEF	1.132 (28.8)	1.766 (44.9)	.590 (15.0)
24	1.438 - 18 UNEF	1.257 (31.9)	1.891 (48.0)	.590 (15.0)

- APPLICATION NOTES**
- For complete dimensions, see the applicable Military Specification.
 - Metric dimensions (mm) are indicated in parentheses.

Dimensions in inches (millimeters) and are subject to change without notice.

© 2013 Glenair, Inc. Mil-Spec Backshells U.S. CAGE Code 06324 Rev. 8.29.14 Printed in U.S.A.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[M85049/27N10N](#) [M85049/27N10W](#) [M85049/27N12N](#) [M85049/27N12W](#) [M85049/27N14N](#) [M85049/27N14W](#)
[M85049/27N16N](#) [M85049/27N16W](#) [M85049/27N18N](#) [M85049/27N18W](#) [M85049/27N20N](#) [M85049/27N20W](#)
[M85049/27N22N](#) [M85049/27N22W](#) [M85049/27N24N](#) [M85049/27N24W](#) [M85049/27N8N](#) [M85049/27N8W](#)
[M85049/27S12W](#) [M85049/27S16W](#) [M85049/27S14W](#) [M85049/27S18W](#) [M85049/27S8W](#) [M85049/27S24N](#)
[M85049/27S14N](#) [M85049/27S22W](#) [M85049/27S16N](#) [M85049/27S20N](#) [M85049/27S18N](#) [M85049/27S10N](#)
[M85049/27S24W](#) [M85049/27S8N](#) [M85049/27S10W](#) [M85049/27S20W](#) [M85049/27S12N](#) [M85049/27S22N](#)