

FOR REFERENCE ONLY

B NX223002B-XX

SPECIFICATIONS:

AC RATING: 10 AMPS @115VAC (RESISTIVE LOAD)
 5 AMPS @115VAC (INDUCTIVE LOAD)
 3 AMPS @115VAC (LAMP LOAD)

DC RATING: 10 AMPS @28VDC (RESISTIVE LOAD)
 5 AMPS @28VDC (INDUCTIVE LOAD)
 3 AMPS @28VDC (LAMP LOAD)

MECHANICAL LIFE: 500,000 CYCLES
 ELECTRICAL ENDURANCE: 20,000 CYCLES @ SEA LEVEL
 5,000 CYCLES @ 50,000 FEET

ACTION: MOMENTARY SNAP

OPERATING FORCE:
 SERIES 20 & 30: 3 TO 5 POUNDS MOMENTARY
 1/2 TO 2 POUNDS PUSH-PULL

SERIES 22 & 32: 2 TO 3 POUNDS MOMENTARY



WEIGHT: .050 POUNDS MAXIMUM

CASE: ALUMINUM ALLOY 2011-T3,
 "EU" (ROHS COMPLIANT)
 CLEAR ANODIZED IAW MIL-A-8625

PLUNGER: GLASS FILLED NYLON

BODY: DIALLYL PHTHALATE IAW MIL-M-14







TERMINALS: THREADED #2-56 NC-2B

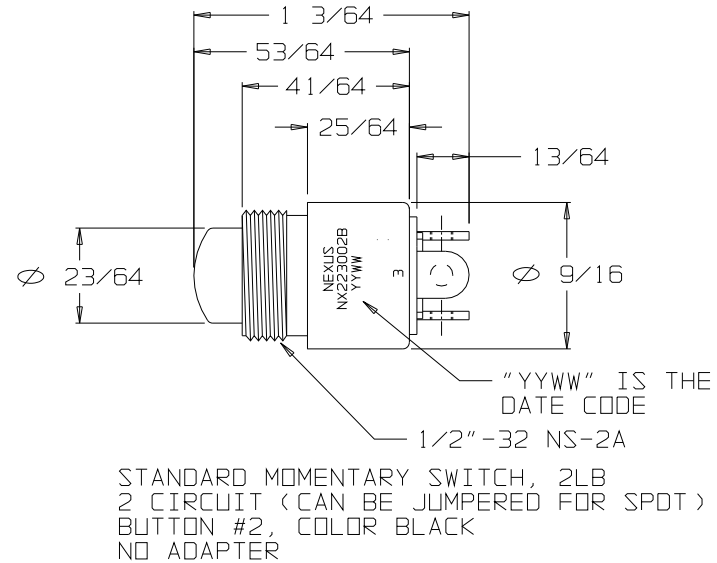

ORDERING INFORMATION:

NX223002B-00 SWITCH ONLY
 NX223002B-60 SWITCH, MOUNTING HARDWARE
 NX223002B-61 SWITCH, MOUNTING HARDWARE, TERNIMAL HARDWARE
 NX223002B-00EU SWITCH (ROHS) ONLY
 NX223002B-60EU SWITCH (ROHS), MOUNTING HARDWARE (ROHS)
 NX223002B-61EU SWITCH (ROHS), MOUNTING HARDWARE (ROHS), TERNIMAL HARDWARE

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.



TERMINAL HARDWARE

MOUNTING HARDWARE

MOUNTING HARDWARE (ROHS)

A	INITIAL RELEASE		4/16/07	EWT
LET.	REVISION	CN #	DATE	CHK.

DWN. BY	EWT	DATE	4/16/07	MATERIAL	N/A
CHECKED BY		DATE		FINISH	N/A
APPR. BY		DATE		WEIGHT	—
				SCALE	N/A
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON				TITLE SWITCH 2-CIRCUIT MOMENTARY 2LB	
.XX .XXX ANGLES ±.003 ±.5°					
DO NOT SCALE DWG.				SHEET	1 OF 1
				SIZE	B
				DWG. NO.	NX223002B-XX

NEXUS
STAMFORD, CONN

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[NX223002B](#)