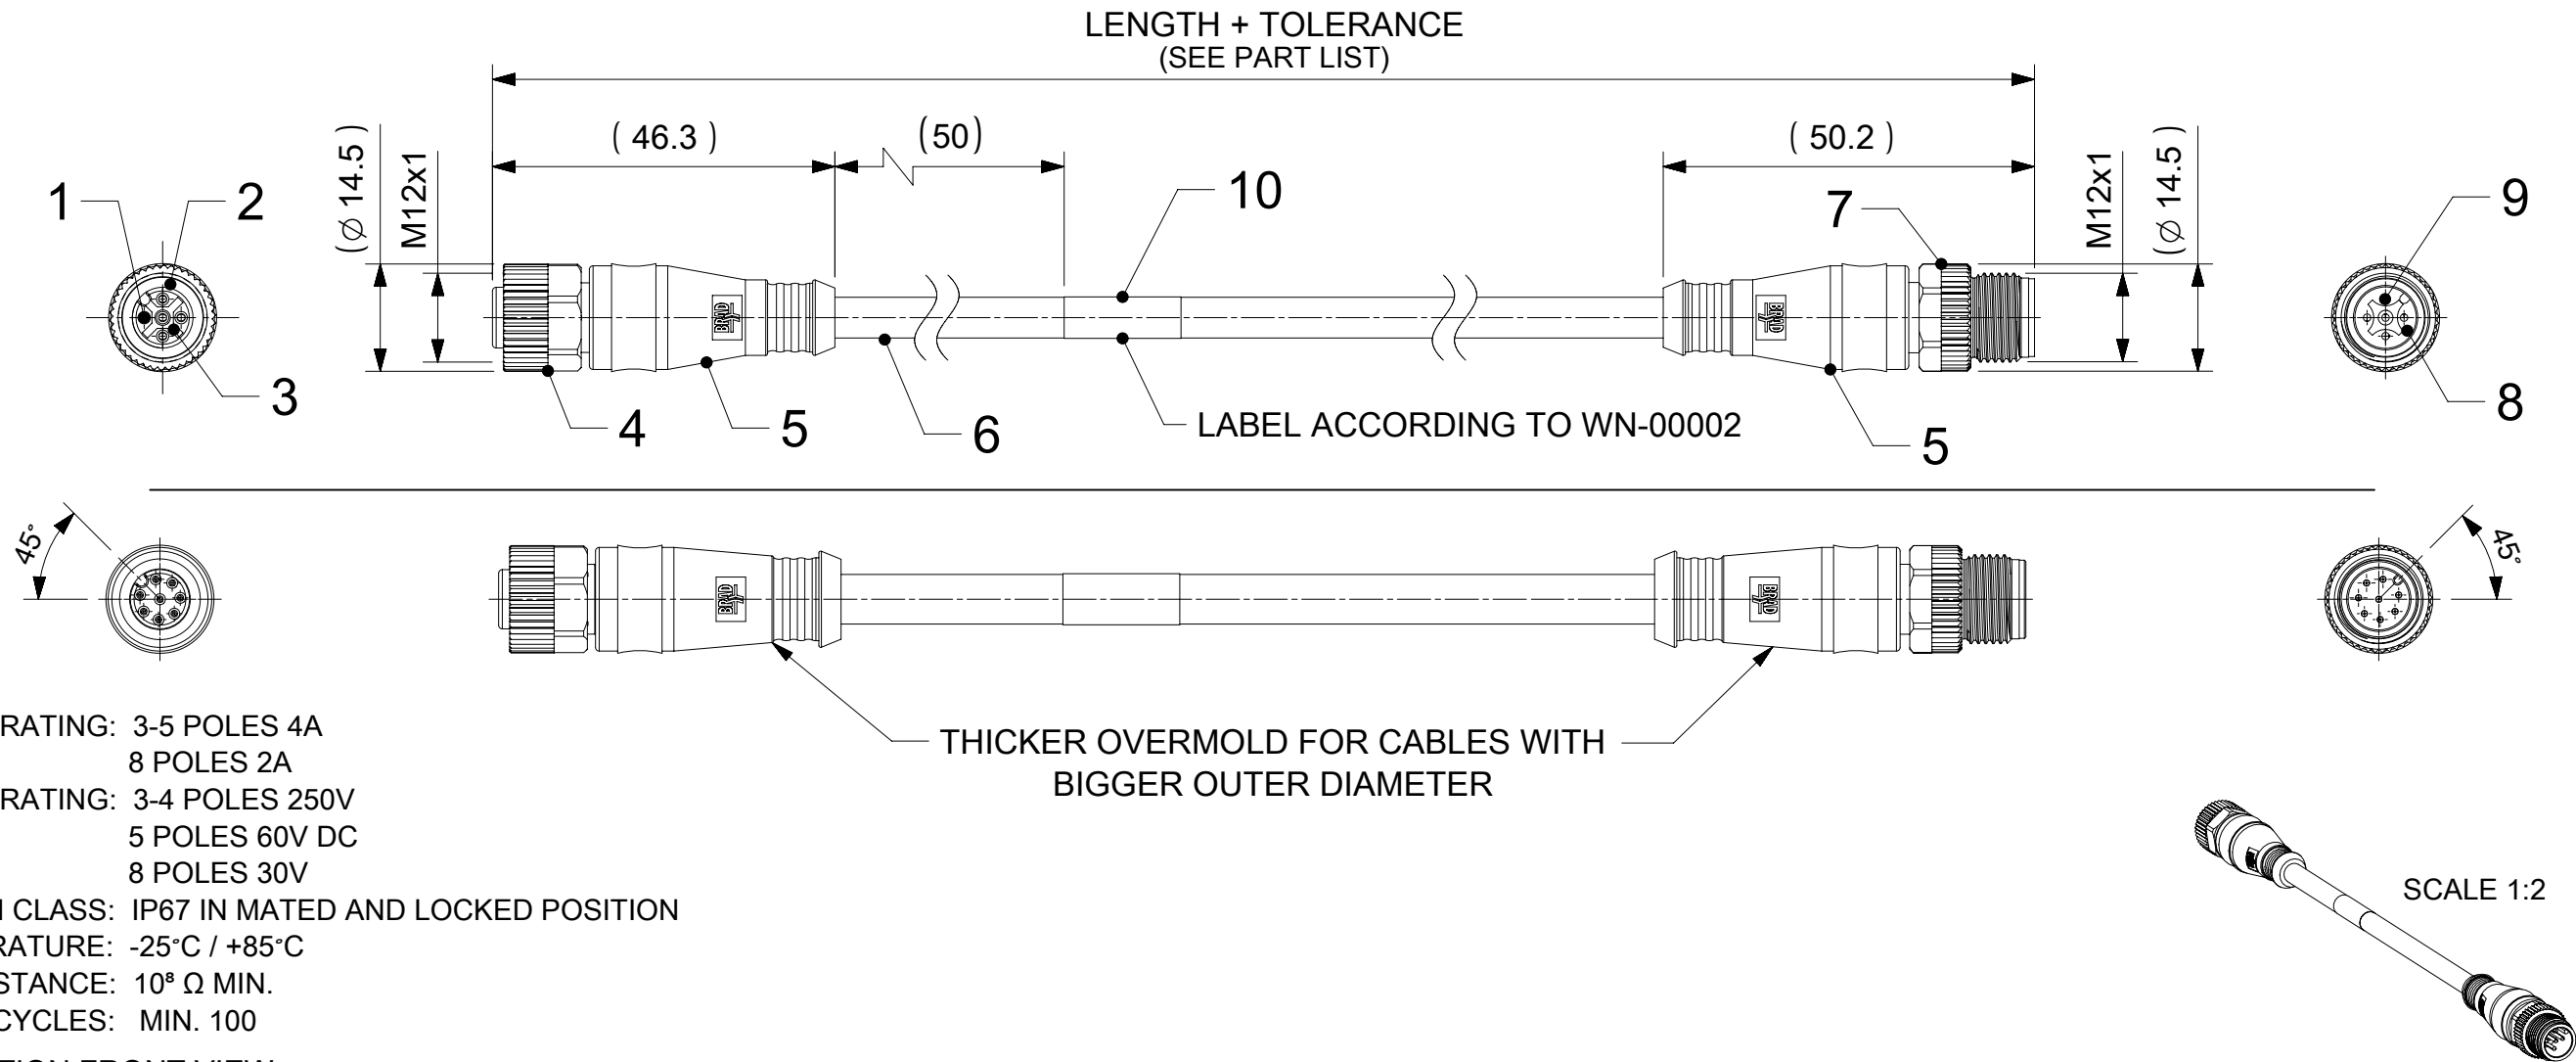


FEMALE PLUG M12 STRAIGHT TO MALE PLUG M12 STRAIGHT



CABLE	3 POLES		4 POLES		5 POLES		5 POLES		8 POLES	
	B30, B55		B30, B33, B36, B55		B30, B33, B36, B55		B42		B41, B49	
FEMALE										
CONNECTIONS	PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE	PIN	WIRE
	1	BROWN	1	BROWN	1	BROWN	1	BROWN	1	WHITE
	2	---	2	WHITE	2	WHITE	2	WHITE	2	BROWN
	3	BLUE	3	BLUE	3	BLUE	3	BLUE	3	GREEN
	4	BLACK	4	BLACK	4	BLACK	4	BLACK	4	YELLOW
	5	---	5	---	5	GREY	5	GREEN/ YELLOW	5	GREY
CODING REQUIRED TO IEC 61076-2-101										

FOR OPTIONS SEE - NUMERICAL CODE - ON SHEET 2

10	1	LABEL OR PRINTING	VINYL / ---	---
9	3 / 4 / 5	CONTACT M12 MALE	COPPER	SELECTIVE GOLD OVER NICKEL
8	8		BRASS	SELECTIVE GOLD OVER NICKEL
7	1	INSERT MALE BLACK	TPU	---
6	1	COUPLING NUT MALE	SEE SHEET 2	SEE SHEET 2
5	-	CABLE	SEE SHEET 2	---
4	-	OVERMOULDING	TPU	SEE SHEET 2
3	1	COUPLING NUT FEMALE	SEE SHEET 2	SEE SHEET 2
2	1	INSERT FEMALE BLACK	PUR	---
1	3 / 4 / 5	CONTACT M12 FEMALE	BRONZE	SELECTIVE GOLD OVER NICKEL
	8		BRASS	SELECTIVE GOLD OVER NICKEL
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE	CURRENT REV DESC: CHANGED DIMENSIONING STYLE OF OVERALL LENGTH TO "END TO END". ADDED B49 CABLE P/N'S & NOTES. SORTED PART LIST USING CABLE TYPES ON SHEET 3&4.						
mm		1:1							
GENERAL TOLERANCES (UNLESS SPECIFIED)									
ANGULAR TOL			±	1.0 °					
4 PLACES			±						
3 PLACES			±						
2 PLACES			±	0.05					
1 PLACE			±	0.3					
0 PLACES			±	0.5					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
					A3-SIZE	120066	SEE SHEET 3 & 4	GENERAL MARKET	1 OF 4

ENGINEERING NO. - NUMERICAL CODE (Available parts see PART LIST table. Other parts available upon request).

88X030XXXXXX

88=M12x1
Double ended

Poles:
3=3 Poles
4=4 Poles
5=5 Poles
8=8 Poles

Heads style:
030=Plug Female Straight
to Plug Male Straight

Cable type: See Table

Units:
M=Meter
C=Centimeter
T=10x Meter








Length
Examples:
005=0.5 units
010=1 units
020=1 units
050=5 units
100=10 units
150=15 units
200=20 units

Overmold color:
Blank (Standard)=Black
A=Grey / G=Black / Y=Yellow / R=Red

Coupling Nut:
Blank (Standard)=Knurled/Hex Brass, Ni Plated
5=Knurled Derlin
7=Knurled Brass Ni Plated, Teflon Coated

H= 2 pcs. of I/D Carrier PVC Transparent
(Cable B36 always with
2 pcs. I/D Carrier)

FEMALEMALE

CABLE INFORMATION (for more information see Cable Data Sheet)

CABLE TYPE	NO. OF WIRES	CROSS SECTION	CABLE JACKET	UL	CSA	STATIC: TEMP. / BENDING RADIUS	DYNAMIC: TEMP. / BENDING RADIUS	DRAG CHAIN: TEMP. / BENDING RADIUS	DRAG CHAIN	CABLE PRODUCT SPECIFICATION	CABLE SPEC. DRAWING
B30	3 / 4 / 5	0.34mm²	TPU Black	UL 21215/758	C22.2 I/II A/B 80°/600V	-40°C to +90°C 5xO.D.	-25°C to +80°C 7.5xO.D.	-5°C to +60°C 7.5xO.D.	up to 5 000 000 cycles at temp 20°C	1552200001	SD-120209-001
B33	4 / 5	0.34mm²	TPU Gray								SD-120209-001
B36	4 / 5	0.34mm²	TPU Orange								SD-120209-001
B41	8	0.25mm²	TPU Black								SD-120209-006
B42	5	0.34mm²	TPU Black								SD-120209-001
B49	8	0.25mm²	TPU Orange								SD-120209-006
B55	3 / 4 / 5	0.34mm²	TPU Yellow								n/a

CABLE LENGTH TOLERANCES

LENGTH	TOLERANCE
0m-1m	+40 mm
>1m-5m	+60 mm
>5m-10m	+80 mm
>10m-20m	+140 mm
>20m-30m	+160 mm
>30m	+1% length

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS

mm

SCALE

1:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL ± 1.0 °

4 PLACES ±

3 PLACES ±

2 PLACES ± 0.05

1 PLACE ± 0.3

0 PLACES ± 0.5

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: CHANGED DIMENSIONING STYLE OF OVERALL LENGTH TO "END TO END". ADDED B49 CABLE P/N'S & NOTES. SORTED PART LIST USING CABLE TYPES ON SHEET 3&4.

EC NO: 789428
DRWN: AKABADI
CHK'D: RSILLER
APPR: RSILLER

2023/03/08
2024/07/02
2024/07/02

INITIAL REVISION:
DRWN: JMARSZALEK
APPR: RSILLER

2016/07/22
2016/08/29

THIRD ANGLE PROJECTION

DRAWING

SERIES

MATERIAL NUMBER

CUSTOMER

SHEET NUMBER

moLEX

CSE M12 XP AC FE STR WSOR MA STR XM DE

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER

1200668993

DOC TYPE

PSD

DOC PART

000

REVISION

B

SEE SHEET 3 & 4

GENERAL MARKET

2 OF 4


DOCUMENT STATUS

P1

RELEASE DATE

2024/07/02 09:17:54

	10	9	8	7	6	5	4	3	2	1																																													
F	PART LIST																																																						
	MOLEX PN			ENGINEERING No			L [mm]			F																																													
	3P CABLE B30			5P CABLE B30			5P CABLE B33																																																
	1200668889	883030B30M006	600	1200659666	885030B30M005	500	1200669257	885030B33M005	500																																														
	1200668890	883030B30M010	1000	1200656067	885030B30M005H	500	1200669901	885030B33M005A	500																																														
	1200668891	883030B30M020	2000	1200668991	885030B30M006	600	1200669258	885030B33M010	1000																																														
	1200668892	883030B30M030	3000	1200668992	885030B30M010	1000	1200669656	885030B33M010A	1000																																														
	1200668893	883030B30M050	5000	1200669242	885030B30M0107	1000	1200669247	885030B33M020	2000																																														
	1200668894	883030B30M100	10000	1200669145	885030B30M015	1500	1200669657	885030B33M020A	2000																																														
	1200669718	883030B30M150	15000	1200668993	885030B30M020	2000	1200669253	885030B33M030	3000																																														
	1200669719	883030B30M200	20000	1200659667	885030B30M025	2500	1200669658	885030B33M030A	3000																																														
E	1200669720	883030B30M250	25000	1200668994	885030B30M030	3000	1200669254	885030B33M050	5000	E																																													
	4P CABLE B30			1200668994	885030B30M030	3000	1200669659	885030B33M050A	5000																																														
	1200669157	884030B30M002	200	1200669482	885030B30M040	4000	1200669248	885030B33M100	10000																																														
	1200669923	884030B30M003	300	1200668995	885030B30M050	5000	1200669660	885030B33M100A	10000																																														
	1200669480	884030B30M005	500	1200669484	885030B30M060	6000	1200669661	885030B33M150A	15000																																														
	1200668817	884030B30M006	600	1200669485	885030B30M080	8000	1200669249	885030B33M200	20000																																														
	1200668818	884030B30M010	1000	1200668996	885030B30M100	10000	1200669662	885030B33M200A	20000																																														
	1200665456	884030B30M010R	1000	1200669486	885030B30M150	15000	1200669255	885030B33M300	30000																																														
	1200669521	884030B30M015	1500	1200669487	885030B30M180	18000	1200669902	885030B33M300A	30000																																														
	1200668819	884030B30M020	2000	1200669488	885030B30M200	20000	1200669903	885030B33M400A	40000																																														
D	1200665457	884030B30M020R	2000	1200669489	885030B30M250	25000	1200669904	885030B33M500A	50000	D																																													
	1200669144	884030B30M025	2500	1200669483	885030B30M300	30000	4P CABLE B36																																																
	1200668820	884030B30M030	3000	4P CABLE B33			1200669524	884030B36M0057H	500																																														
	1200665458	884030B30M030R	3000	1200669876	884030B33M003A	300	1200669019	884030B36M0057Y	500																																														
	1200669158	884030B30M030R	3000	1200669250	884030B33M005	500	1200669562	884030B36M0067Y	600																																														
	1200669181	884030B30M040	4000	1200669575	884030B33M005A	500	1200669530	884030B36M0107H	1000																																														
	1200665459	884030B30M040R	4000	1200669223	884030B33M010	1000	1200669530	884030B36M0107Y	1000																																														
	1200668821	884030B30M050	5000	1200669576	884030B33M010A	1000	1200669020	884030B36M0107Y	1000																																														
	1200665460	884030B30M050R	5000	1200669714	884030B33M015A	1500	1200669531	884030B36M0157H	1500																																														
	1200669182	884030B30M060	6000	1200669224	884030B33M020	2000	1200669021	884030B36M0157Y	1500																																														
C	1200668863	884030B30M070	7000	1200669577	884030B33M020A	2000	1200669525	884030B36M0207H	2000	C																																													
	1200669481	884030B30M080	8000	1200669225	884030B33M030	3000	1200669022	884030B36M0207Y	2000																																														
	1200668822	884030B30M100	10000	1200669578	884030B33M030A	3000	1200669526	884030B36M0307H	3000																																														
	1200669504	884030B30M120	12000	1200669280	884030B33M040	4000	1200669023	884030B36M0307Y	3000																																														
	1200669505	884030B30M140	14000	1200669715	884030B33M040A	4000	1200669024	884030B36M0407Y	4000																																														
	1200668913	884030B30M150	15000	1200669226	884030B33M050	5000	1200669025	884030B36M0407Y	4000																																														
	1200669506	884030B30M160	16000	1200669579	884030B33M050A	5000	1200669532	884030B36M0507H	5000																																														
	1200668914	884030B30M200	20000	1200669716	884030B33M070A	7000	1200668859	884030B36M0507Y	5000																																														
	1200668915	884030B30M250	25000	1200669251	884030B33M100	10000	1200669025	884030B36M0607Y	6000																																														
	1200668916	884030B30M300	30000	1200669580	884030B33M100A	10000																																																	
B	1200669513	884030B30M400	40000	1200669619	884030B33M150A	15000	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION <table><tr><td>DIMENSION UNITS</td><td>SCALE</td><td rowspan="8">CURRENT REV DESC: CHANGED DIMENSIONING STYLE OF OVERALL LENGTH TO "END TO END". ADDED B49 CABLE P/N'S & NOTES. SORTED PART LIST USING CABLE TYPES ON SHEET 3&4.</td><td colspan="4"> molex CSE M12 XP AC FE STR WSOR MA STR XM DE </td></tr><tr><td colspan="6">GENERAL TOLERANCES (UNLESS SPECIFIED)</td></tr><tr><td>ANGULAR TOL</td><td>± 1.0 °</td></tr><tr><td>4 PLACES</td><td>±</td></tr><tr><td>3 PLACES</td><td>±</td><td colspan="3" rowspan="2">EC NO: 789428 DRWN: AKABADI 2023/03/08 CHK'D: RSILLER 2024/07/02 APPR: RSILLER 2024/07/02</td></tr><tr><td>2 PLACES</td><td>± 0.05</td></tr><tr><td>1 PLACE</td><td>± 0.3</td><td colspan="3" rowspan="2">INITIAL REVISION: DRWN: JMARSZALEK 2016/07/22 APPR: RSILLER 2016/08/29</td></tr><tr><td>0 PLACES</td><td>± 0.5</td></tr><tr><td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td>THIRD ANGLE PROJECTION</td><td>DRAWING</td><td>SERIES</td><td>DOCUMENT NUMBER</td></tr><tr><td colspan="2"></td><td></td><td>A3-SIZE</td><td>120066</td><td>12006688993</td></tr></table>						DIMENSION UNITS	SCALE	CURRENT REV DESC: CHANGED DIMENSIONING STYLE OF OVERALL LENGTH TO "END TO END". ADDED B49 CABLE P/N'S & NOTES. SORTED PART LIST USING CABLE TYPES ON SHEET 3&4.	molex CSE M12 XP AC FE STR WSOR MA STR XM DE				GENERAL TOLERANCES (UNLESS SPECIFIED)						ANGULAR TOL	± 1.0 °	4 PLACES	±	3 PLACES	±	EC NO: 789428 DRWN: AKABADI 2023/03/08 CHK'D: RSILLER 2024/07/02 APPR: RSILLER 2024/07/02			2 PLACES	± 0.05	1 PLACE	± 0.3	INITIAL REVISION: DRWN: JMARSZALEK 2016/07/22 APPR: RSILLER 2016/08/29			0 PLACES	± 0.5	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	DOCUMENT NUMBER				A3-SIZE	120066	12006688993
DIMENSION UNITS	SCALE	CURRENT REV DESC: CHANGED DIMENSIONING STYLE OF OVERALL LENGTH TO "END TO END". ADDED B49 CABLE P/N'S & NOTES. SORTED PART LIST USING CABLE TYPES ON SHEET 3&4.	molex CSE M12 XP AC FE STR WSOR MA STR XM DE																																																				
GENERAL TOLERANCES (UNLESS SPECIFIED)																																																							
ANGULAR TOL	± 1.0 °																																																						
4 PLACES	±																																																						
3 PLACES	±		EC NO: 789428 DRWN: AKABADI 2023/03/08 CHK'D: RSILLER 2024/07/02 APPR: RSILLER 2024/07/02																																																				
2 PLACES	± 0.05																																																						
1 PLACE	± 0.3		INITIAL REVISION: DRWN: JMARSZALEK 2016/07/22 APPR: RSILLER 2016/08/29																																																				
0 PLACES	± 0.5																																																						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	DOCUMENT NUMBER																																																		
			A3-SIZE	120066	12006688993																																																		
1200669512	884030B30M550	55000	1200669620	884030B33M200A	20000	PRODUCT CUSTOMER DRAWING			A																																														
			1200669877	884030B33M250A	25000																																																		
			1200669256	884030B33M300	30000																																																		
			1200669874	884030B33M300A	30000																																																		
			1200669875	884030B33M700A	70000																																																		
A	DOCUMENT STATUS			P1	RELEASE DATE			2024/07/02	09:17:54	B																																													
										B																																													
										C																																													
										D																																													
										E																																													
	</																																																						

	10	9	8	7	6	5	4	3	2	1			
F	PART LIST										F		
E	MOLEX PN	ENGINEERING No	L [mm]	MOLEX PN	ENGINEERING No	L [mm]							
	8P CABLE B41			4P CABLE B55									
	1200668895	888030B41M006	600	1200669734	884030B55M005Y	500							
	1200668896	888030B41M010	1000	1200669618	884030B55M010Y	1000							
	1200665461	888030B41M010R	1000	1200669263	884030B55M020Y	2000							
	1200668897	888030B41M020	2000	1200669264	884030B55M030Y	3000							
	1200665462	888030B41M020R	2000	1200669265	884030B55M040Y	4000							
	1200668898	888030B41M030	3000	1200669266	884030B55M050Y	5000							
	1200665463	888030B41M030R	3000	1200669267	884030B55M060Y	6000							
	1200665464	888030B41M040R	4000	1200669418	884030B55M070Y	7000							
D	1200668899	888030B41M050	5000	1200657251	884030B55M080Y	8000							
	1200665465	888030B41M050R	5000	1200657252	884030B55M090Y	9000							
	1200669177	888030B41M090	9000	1200669268	884030B55M100Y	10000							
	1200668900	888030B41M100	10000	1200669269	884030B55M120Y	12000							
	1200669567	888030B41M150	15000	1200669270	884030B55M150Y	15000							
	1200669568	888030B41M200	20000	1200657253	884030B55M160Y	16000							
	5P CABLE B42			1200669271	884030B55M200Y	20000							
	1200668823	885030B42M006	600	1200669742	884030B55M250Y	25000							
	1200668824	885030B42M010	1000	1200669743	884030B55M300Y	30000							
	1200668825	885030B42M020	2000	5P CABLE B55									
C	1200668826	885030B42M030	3000	1200669663	885030B55M010Y	1000							
	1200668827	885030B42M050	5000	1200669664	885030B55M020Y	2000							
	1200668828	885030B42M100	10000	1200669665	885030B55M030Y	3000							
	1200659548	885030B42M150	15000	1200669666	885030B55M050Y	5000							
	1200659549	885030B42M200	20000	1200669667	885030B55M100Y	10000							
	8P CABLE B49			1200669668	885030B55M150Y	15000							
	1200669112	888030B49M038Y	3800	1200669669	885030B55M200Y	20000							
											A		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
DIMENSION UNITS		SCALE		CURRENT REV DESC: CHANGED DIMENSIONING STYLE OF OVERALL LENGTH TO "END TO END". ADDED B49 CABLE P/N'S & NOTES. SORTED PART LIST USING CABLE TYPES ON SHEET 3&4.				molex					
mm		1:1						CSE M12 XP AC FE STR WSOR MA STR XM DE					
GENERAL TOLERANCES (UNLESS SPECIFIED)													
ANGULAR TOL ± 1.0 °													
4 PLACES		±		EC NO: 789428 DRWN: AKABADI2023/03/08 CHK'D: RSILLER2024/07/02 APPR: RSILLER2024/07/02				PRODUCT CUSTOMER DRAWING					
3 PLACES		±											
2 PLACES		± 0.05											
1 PLACE		± 0.3		INITIAL REVISION: DRWN: JMARSZALEK2016/07/22 APPR: RSILLER2016/08/29				DOCUMENT NUMBER			DOC TYPE	DOC PART	REVISION
0 PLACES		± 0.5						1200668993		PSD	000	B	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER				
				A3-SIZE	120066	SEE SHEET 3 & 4	GENERAL MARKET		4 OF 4				
DOCUMENT STATUS		P1	RELEASE DATE	2024/07/02	09:17:54								
FORMAT: mox9916-005A3		REVISION: 1		DATE: 2020/01/11									
10	9	8	7	6	5	4	3	2	1				