
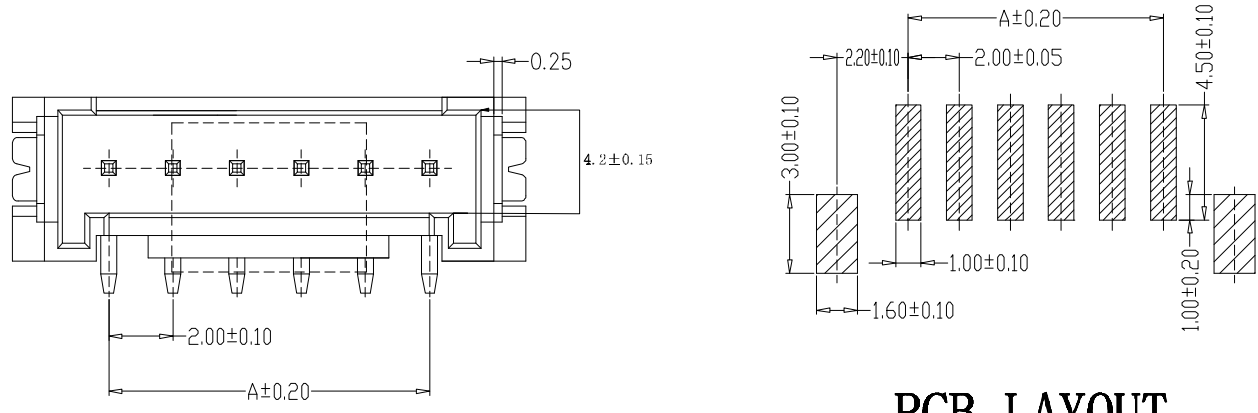


**SPECIFICATIONS**

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer LCP, UL94V-0  
PIN Brass Tin-plated  
Solder Phosphoric bronze Tin-plated

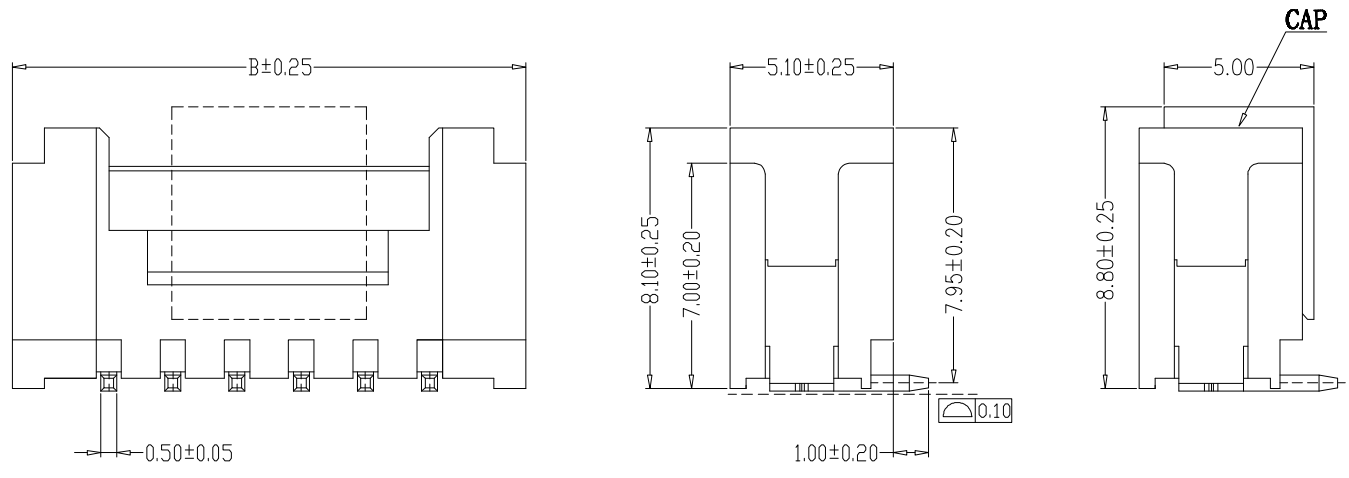

**PCB LAYOUT**

编号	尺寸 (mm)	
	A	B
HC-HY-2ALT	2.00	8.00
HC-HY-3ALT	4.00	10.00
HC-HY-4ALT	6.00	12.00
HC-HY-5ALT	8.00	14.00
HC-HY-6ALT	10.00	16.00
HC-HY-7ALT	12.00	18.00
HC-HY-8ALT	14.00	20.00
HC-HY-9ALT	16.00	22.00
HC-HY-10ALT	18.00	24.00
HC-HY-11ALT	20.00	26.00
HC-HY-12ALT	22.00	28.00
HC-HY-13ALT	24.00	30.00
HC-HY-14ALT	26.00	32.00
HC-HY-15ALT	28.00	34.00
HC-HY-16ALT	30.00	36.00

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制图 DRAWING	钱岳生		料号 PART NO.	HY-NALT		版本 REV.	A
			X.±0.25	X.'±2°		2013、07、01	品名 TITLE		HY立贴	页次 SHEET		1/1
			.X±0.20	.X°±1°		审核 CHECK	张名		客户料号 CUSTOM. NO.			
			.XX±0.15	.XX°±0.5°		核准 APPROVAL	张名					
			.XXX±0.10	.XXX°±0.5°	单位 UNITS	MM	比例 SCALE	1:1	深圳市华灿天禄电子有限公司			