






## SCHOTTKY BARRIER RECTIFIER




TO-220AB/CT



TO-220F/FCT



TO-263/DC



### FEATURES

- Low forward voltage
- High current capability
- High forward surge capability
- Low power losses. High efficiency
- Guarding for over voltage protection



**RoHS**  
COMPLIANT

### APPLICATIONS

Low VF Schottky barrier rectifier are designed for high frequency, miniature switched mode power supplies such as adapters ,lighting and on-board DC/DC conerters

### Primary Characteristic

$I_O$	2*20A
$V_{RRM}$	45V
$I_{FSM}$	420A
$V_F$	0.52V
$T_{jmax}$	150°C
Assembly code	LP

### MECHANICAL DATA

- **Case:** Molded plastic
- **Polarity:** As marked
- **Mounting Position:** Any
- **Molded Plastic:** UL Flammability Classification Rating 94V-0
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Solder bath temperature 275°C maximum,10s per JESD 22-

### Maximum Ratings (Per Leg) at Ta=25°C unless otherwise specified

Characteristics	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	45	V
Working Peak Reverse Voltage	$V_{RWM}$	45	V
Maximum DC Blocking Voltage	$V_{DC}$	45	V
Maximum Average Forward Rectified Current	$I_O$	Per Leg	20
		Total	40
Peak Forward Surge Current,8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	420	A
Operating Temperature Range	$T_J$	150	°C
Storage Temperature Range	$T_{STG}$	-40 to +150	°C
Typical Thermal Resistance (Note1)	$R_{\theta JC}$	TO-220AB,TO-263	2
		TO-220F	4

Note1: Thermal resistance from Junction to case per leg mounted on heatsink.

### Electrical Characteristics (Per Leg) unless otherwise specified

Characteristics	Symbol	Value		Unit	
Forward Voltage Drop(Note2)	$V_F$	Typ.	Max.	V	
		at $I_F=5A$	TA=25°C		0.42
		TA=125°C	0.33		-
at $I_F=10A$		TA=25°C	0.47		-
		TA=125°C	0.41		-
at $I_F=15A$		TA=25°C	0.52		0.57
		TA=125°C	0.47		-
at $I_F=20A$		TA=25°C	0.56		0.62
		TA=125°C	0.52		-
Maximum Reverse Current at $V_R=45V$	$I_R$	TA=25°C	30		100
		TA=125°C	7		-

Note2:Pulse test: 300  $\mu$ s pulse width, 1 % duty cycle



## RATINGS AND CHARACTERISTIC CURVES

FIG. 1 MAXIMUM FORWARD CURRENT DERATING CURVE

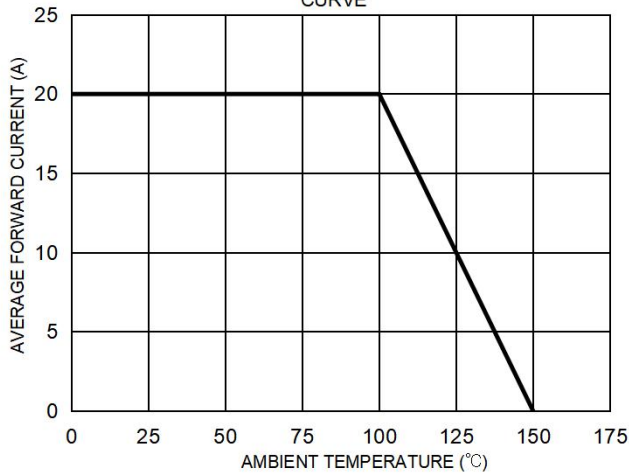


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

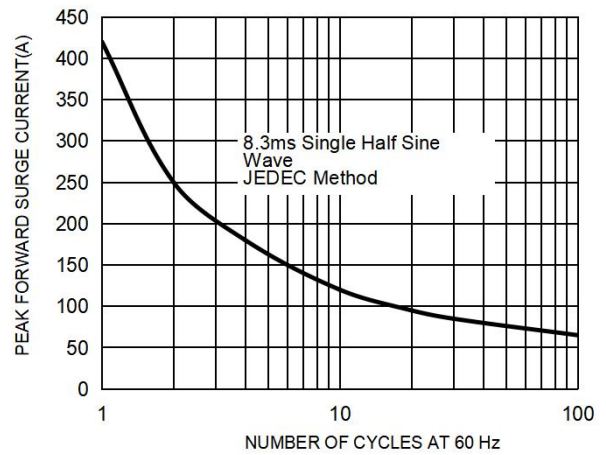


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG


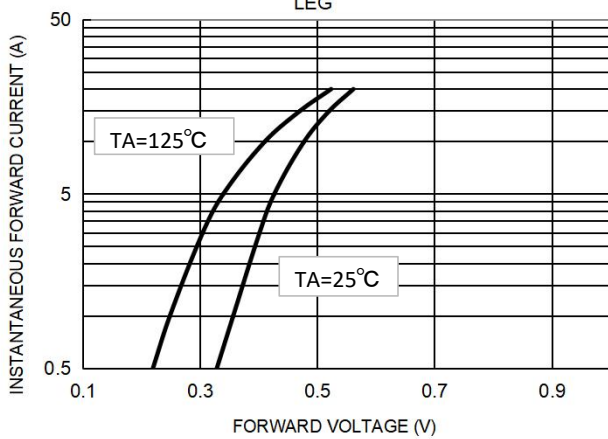



FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG



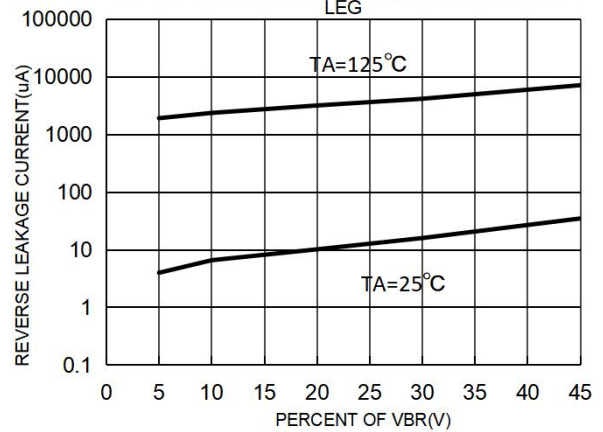


**Package Outline Dimensions millimeters**


TO-220AB

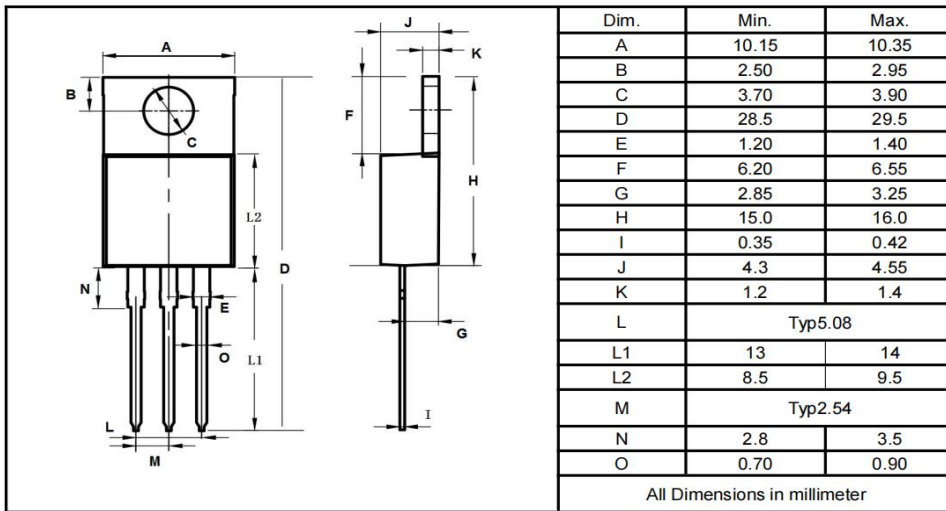

TO-220F

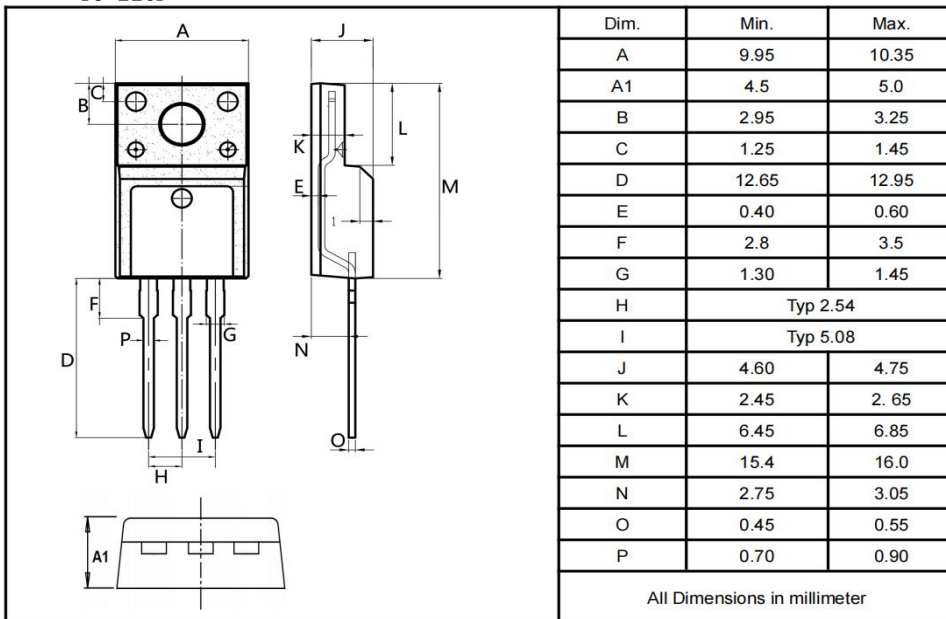


TO-263

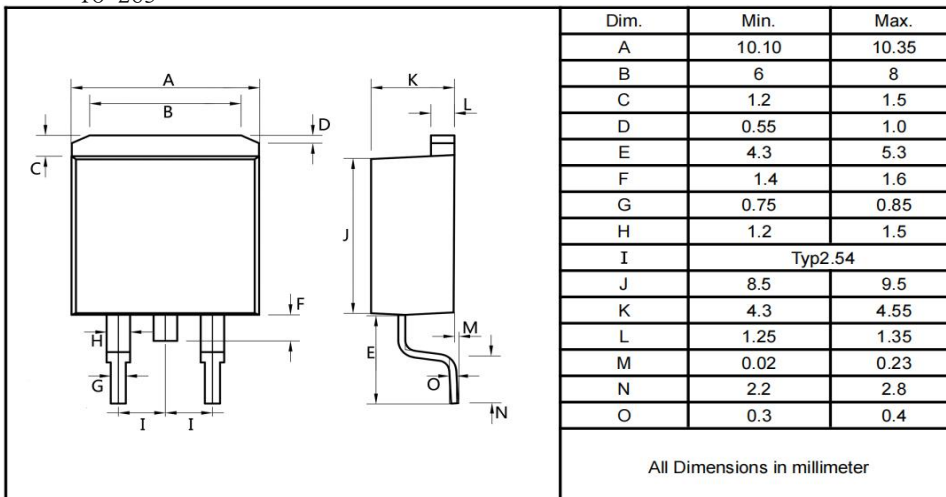



# MBR4045CT/FCT/DC-B

## Marking on the body

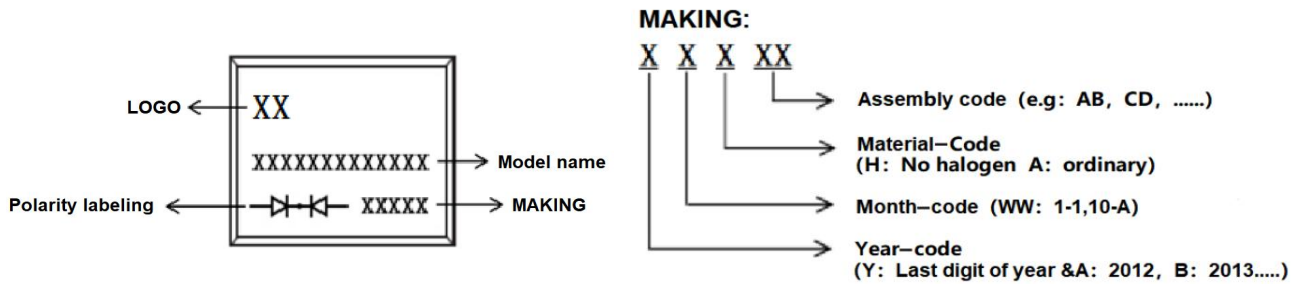

## Ordering information

Part Number	Package	Unit Weight	Base Quantity	Delivery mode
MBR4045CT-B	TO-220AB	0.07oz(1.96g)	50 pcs / tube	1000pcs/box 5000pcs/carton
MBR4045FCT-B	TO-220F	0.06oz(1.74g)	50 pcs / tube	1000pcs/box 5000pcs/carton
MBR4045DC-B	TO-263	0.04oz(1.16g)	50 pcs / tube	1000pcs/box 5000pcs/carton
MBR4045DC-B-R	TO-263	0.04oz(1.16g)	800 pcs / reel	1600pcs/box 8000pcs/carton

Note: For Halogen Free molding compound, add "H" suffix to part number above.

## packing instruction

PKG	最小包装	内盒	外箱
TO-220AB TO-220F TO-263			
	50pcs/管	1000pcs/盒	5000pcs/箱
TO-263-R			
	800pcs/盘	1600pcs/盒	8000pcs/箱

### Notice

- All product, product specifications and data are subject to change without notice to improve. The right to explain is owned by LINGXUN electronics company.
- Confirm that operation temperature is within the specified range described in the product specification. Avoid applying power exceeding normal rated power;  
exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
- LINGXUN electronics shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.