


# COAXIAL CONNECTOR, MMBX, 50 Ohm, Straight bulkhead receptacle, jack (female)

22\_MMBX-50-0-1/111\_N

## Properties

- Smallest board-to-board distance
- Very high frequencies
- Excellent return loss values
- Blind mateable
- Reliable and secure connection

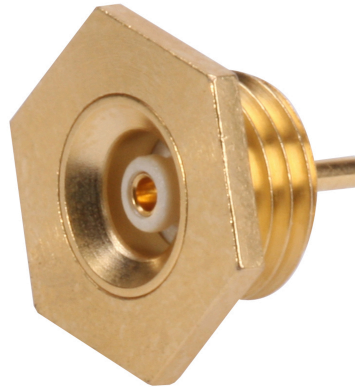

Product configuration		
Interface type	Gender	Standard
MMBX	jack	HUBER+SUHNER-MMBX
Interface and material data		
Piece parts	Material	Plating
Centre contact	Brass	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	LCP (Liquid crystal polymer)	
Electrical data		
Impedance	50 Ω	
Interface frequency	12.4 GHz	
Mechanical data		
Weight	0.0014 kg	
Mating cycles	100	
Chassis torque	2 N	
Flange type	hexagonal flange / hex. 10	
Tab style	Standard	
Environmental data		
Operation temperature	-55 °C ... 155°C	

**COAXIAL CONNECTOR, MMBX, 50 Ohm, Straight bulkhead receptacle, jack (female)**  
22\_MMBX-50-0-1/111\_N

Ordering Information Table		
Item number	Item description	Packaging type
23008312	22_MMBX-50-0-1/111_NE	Single

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.  
DOCUMENT PIM-P2801 / Date of publication: 26.11.2023 / uncontrolled copy