

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.90~13.10	18.9~19.1
1.25~2.00	12.90~13.10	19.1~19.2
2.00~3.00	12.90~13.10	19.3~19.4

NOTES:

1. Rating:

CQC 6A 250VAC 6(8)A 250VAC
 8A/128A 250VAC T105/55
 UL cUL 6GPA 250VAC
 10GPA 125VAC
 T105/55 TV-5

VDE ENEC 6(4)A 250VAC T85/55

KC 6(4)A 250VAC T85/55

TUV 8/128A 250VAC T85/55

2. Circuit Diagram: 4P ON-OFF

3. Terminal Strength: ≥80N

4. Electrical life: ≥10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min



Terminals to Button: 3000VAC 1min

Leakage Current: 1mA

6. Current resistance: ≤50mΩ (initial)

7. Insulation resistance: ≥100MΩ

8. Body Material: NYLON 66 94V-0~2

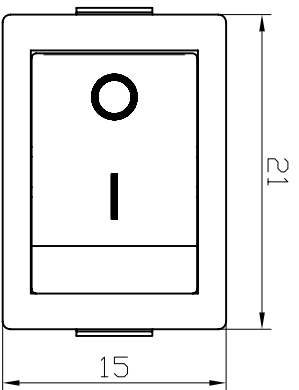

普通公差:
COMMON TOLERANCE:

UP TO 5	±0.20
ABOVE 5 TO 30	±0.30
ABOVE 30	±0.50
ANGULAR	±5°

深圳市华灿天禄电子有限公司

单位 UNIT	mm	投影 PROJECTED	Φ	品名 PRODUCT NAME	跷板开关	比例 SCALE	Free
绘图 DRAWN BY	吴	校对 CHECKED BY	梁金勇	型号 MODEL NO.	RS601D		
日期 DATE	2015.09.08	核准 APPROVAL BY	周培雷	图号 DWG NO.	RS601D1-2010011BB-3A		

A4		
A3		
A2		
A1		
REV.	DATE	REVISION DESCRIPTION