


## Product data sheet

### Characteristics

# XZCP1141L15

pre-wired connectors XZ - straight female -  
M12 - 4 pins - cable PUR 15m

Product availability: Non-Stock - Not normally stocked in distribution facility

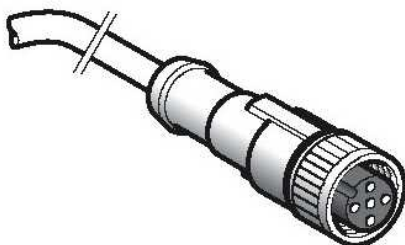

### Main

|                                    |                                       |
|------------------------------------|---------------------------------------|
| Commercial Status                  | Commercialised                        |
| Accessory / separate part category | Cabling accessories                   |
| Accessory / separate part type     | Pre-wired connectors                  |
| Series name                        | General purpose                       |
| Electrical connection              | Straight female connector M12, 4 pins |
| Collar material                    | Metal                                 |
| Status LED                         | Without                               |
| Cable length                       | 49.21 ft (15 m)                       |

### Complementary

|                                |                          |
|--------------------------------|--------------------------|
| Cable connector fixing         | Screw-on                 |
| Cable outer diameter           | 0.2 in (5.2 mm)          |
| Cable composition              | 4 x 0.34 mm <sup>2</sup> |
| Wire insulation material       | PUR                      |
| [Ue] rated operational voltage | 300 V DC<br>250 V AC     |
| [In] rated current             | 4 A                      |
| Contact resistance             | <= 5000 µOhm             |
| Insulating resistance          | >= 1 GΩ                  |

### Environment

|                                       |                                                                           |
|---------------------------------------|---------------------------------------------------------------------------|
| IP degree of protection               | IP67                                                                      |
| Ambient air temperature for operation | 23...176 °F (-5...80 °C) (flexing)<br>-40...176 °F (-40...80 °C) (static) |
| Ambient air temperature for storage   | -40...176 °F (-40...80 °C)                                                |

### Ordering and shipping details

|                       |                                                           |
|-----------------------|-----------------------------------------------------------|
| Category              | 22483 - MACHINE CABLES                                    |
| Discount Schedule     | DS3                                                       |
| GTIN                  | 003389110075205                                           |
| Nbr. of units in pkg. | 1                                                         |
| Package weight(Lbs)   | 1.32                                                      |
| Product availability  | Non-Stock - Not normally stocked in distribution facility |
| Returnability         | N                                                         |
| Country of origin     | PL                                                        |

### Offer Sustainability

|                          |                                                                                       |
|--------------------------|---------------------------------------------------------------------------------------|
| Sustainable offer status | Not Green Premium product                                                             |
| RoHS                     | Compliant - since 0649 - <a href="#">Schneider Electric declaration of conformity</a> |

### Contractual warranty

|        |           |
|--------|-----------|
| Period | 18 months |
|--------|-----------|

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XZCP1141L15](#)