
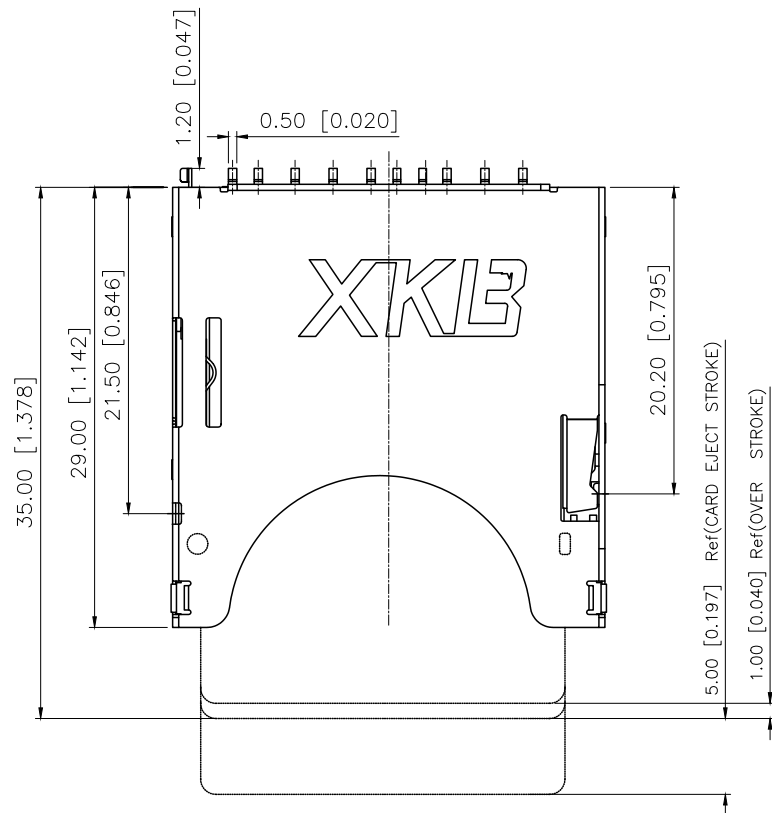
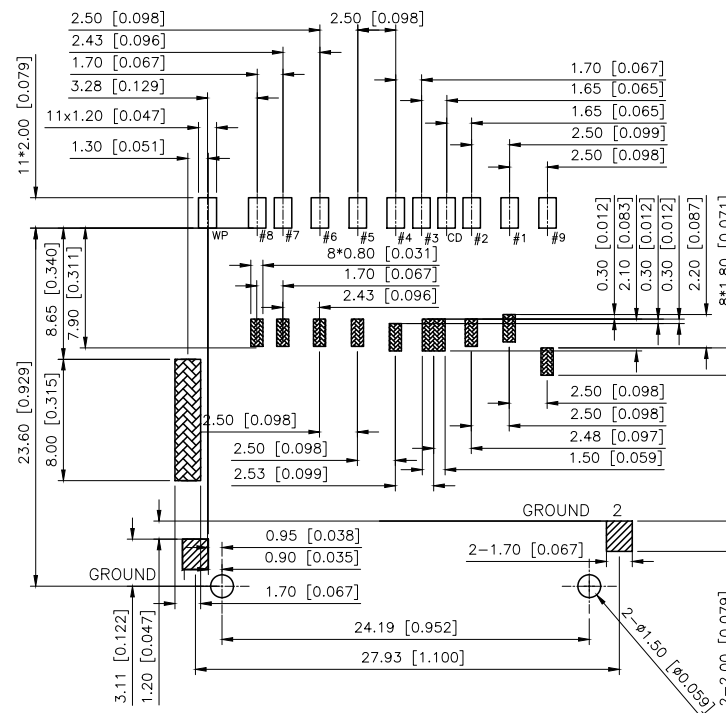
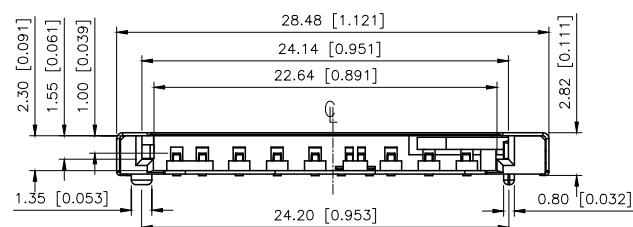


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.05.09	阿树


Electrical:

- Current Rating: 0.5mA AC/DC max.
- Voltage Rating: 12V AC/DC
- Ambient Temperature Range: -20 to +60
- Storage Temperature Range: -40 to +70
- Ambient Humidity Range: 95% R.H. Max.
- Contact Resistance: 100mΩ max.
- Insulation Resistance: 1000MΩ min./500VDC
- Mating Cycles: 5000 Insertions

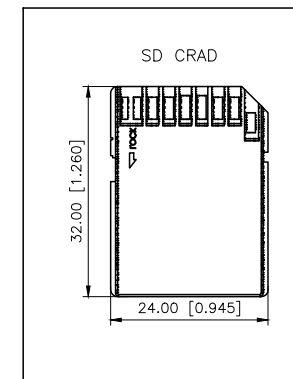

Recommend PCB Layout Drawing:
(Unit: mm .X $\pm$ 0.15 .XX $\pm$ 0.05 .XXX $\pm$ 0.02)

PIN NO.	PIN NAME
#1	(CD/DAT3)
#2	(CMD)
#3	(VSS1)
#4	(VDD)
#5	(CLK)
#6	(VSS2)
#7	(DAT0)
#8	(DAT1)
#9	(DAT2)

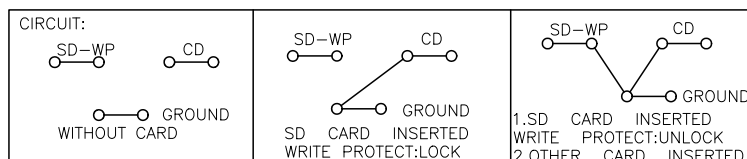

③	Shell	1	SUS	
②	Terminal	9	COPPER ALLOY	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW: 	MODEL TYPE: SD CARD CONN		
CHECKED		UNIT: mm/in	PART NO.: XKSD-006		
APPROVED		SIZE: A4	DWG NO.:		
PRECISION CO., LIMITED			SCALE	PAGE	REVISION
			N/A	1/1	A1