
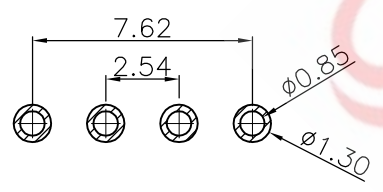
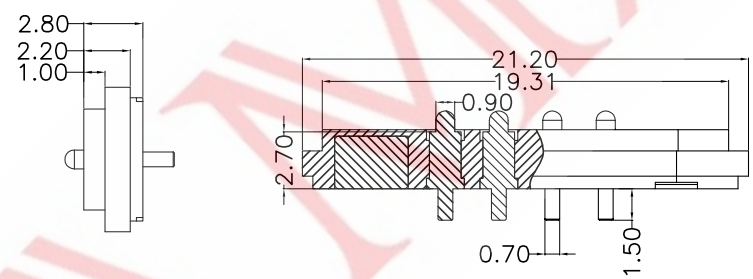
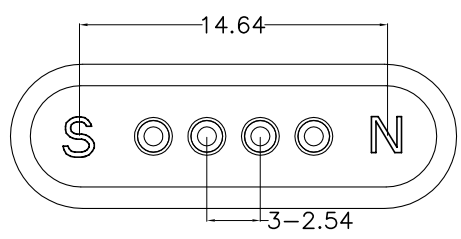
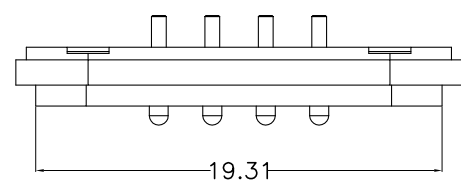


1 POGO PIN
2 REAC/ROHS


REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.12

- Notes:
Characteristics:
- A. Material (料号)
 - 1) Housing: High Plastic BLACK (UL94V-0)
 - 2) Plunger: brass c3604
 - 3) Barrel: brass c3604
 - 4) Spring: Stainless steel wire.
 - B. Plating (镀层)
 - 1) Plunger: Brass, Plating 3u' Au over Min. 50u' Ni.
 - 2) Barrel: Brass, Plating 3u' Au over Min. 50u' Ni.
 - 3) Spring: Stainless steel wire. Plating Min. 1u' Au
 - C. Electrical (电性能)
 - 1) Operating voltage: 12V Max.
 - 2) Operating current: 2A Max.
 - 3) Contact resistance: 30mohm Max. at working height (Quiescence).
 - D. Mechanical (机械性能)
 - 1) Total stroke: 1.10mm.
 - 2) Working height: 0.7mm.
 - 3) Spring Force: 25gf±10gf at working height
 - 4) Mechanical life: 10,000 cycle min.
 - 5) Don't exceed the Max. allowed compression
 - E. Environmental (环境性能)
 - 1) Storage and operating temperature range: -40°C~+85°C
 - 2) Humidity range: 10% RH to 90% RH
 - 3) Salt spray: 48H
 - F. Others (其他)
 - 1) The dimensions marked * are critical, Should be checked in production
 - 2) RoHS compliant product.

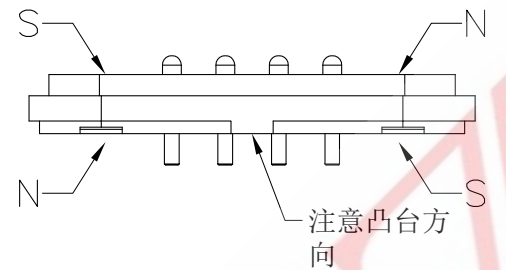

※精密尺寸(公差±0.05mm)

DESIGN	WANGGUIFA	2018.06.12	≥0~2<	±0.15	
CHECKED	ZHENGUILAN	2018.06.12	≥2~5<	±0.25	
APPROVED	LILIANJIANG	2018.06.14	≥0~2<	±0.15	
			≥5	±0.35	

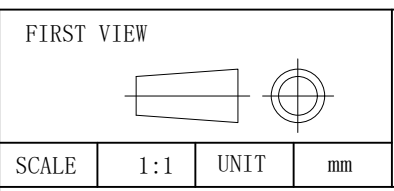

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.KKK-JP.COM

TITLE: 2.5PH 180度直脚 PA3.7	
DWG NO: GA0480-P001	
PART NO: GA0480230771	
MODEL NO: PR5L3715-4P-C-H	
NAME:	POGO PIN

SAMZO COMPONENTS
Electronic switch and connector manufacturer