
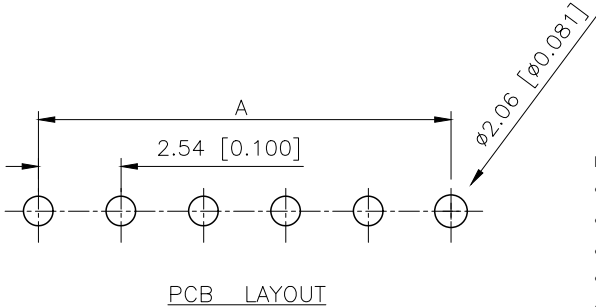


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.13	阿树

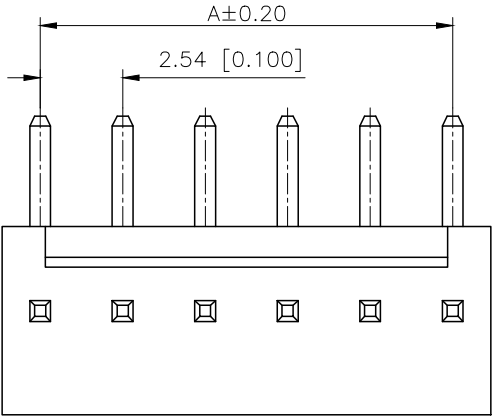

- SPECIFICATIONS
- Voltage rating: 250V AC/DC
 - Current rating: 3A AC/DC
 - Withstanding Voltage: 1000V AC/minute
 - Temperature range: -40°C ~ +125°C
 - Insulation resistance: ≥ 1000MΩ
 - Contact resistance: ≤ 10mΩ

PART NO.:

X2510 W R-XX A-N0 SN
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
② Category: W-WAFER
③ Welding Board Angle: R-Right Angle 90°
④ Row No-Pin No: XX-02P~15P
⑤ TYPE: B
⑥ Material: N0-PA9T UL94-V0
⑦ Planting Category: SN-Bright tin plating

poles	Dimensions/mm	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10

X2510WR-XXA-N0SN	N0-Nylon66	Brass	Tin-Plated	X2510H
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	MODEL TYPE: 2.54mm Crimp Style Connectors
CHECKED		UNIT: mm/in	PART NO.: X2510WR-XXA-N0SN
APPROVED		SIZE: A4	DWG NO.: