


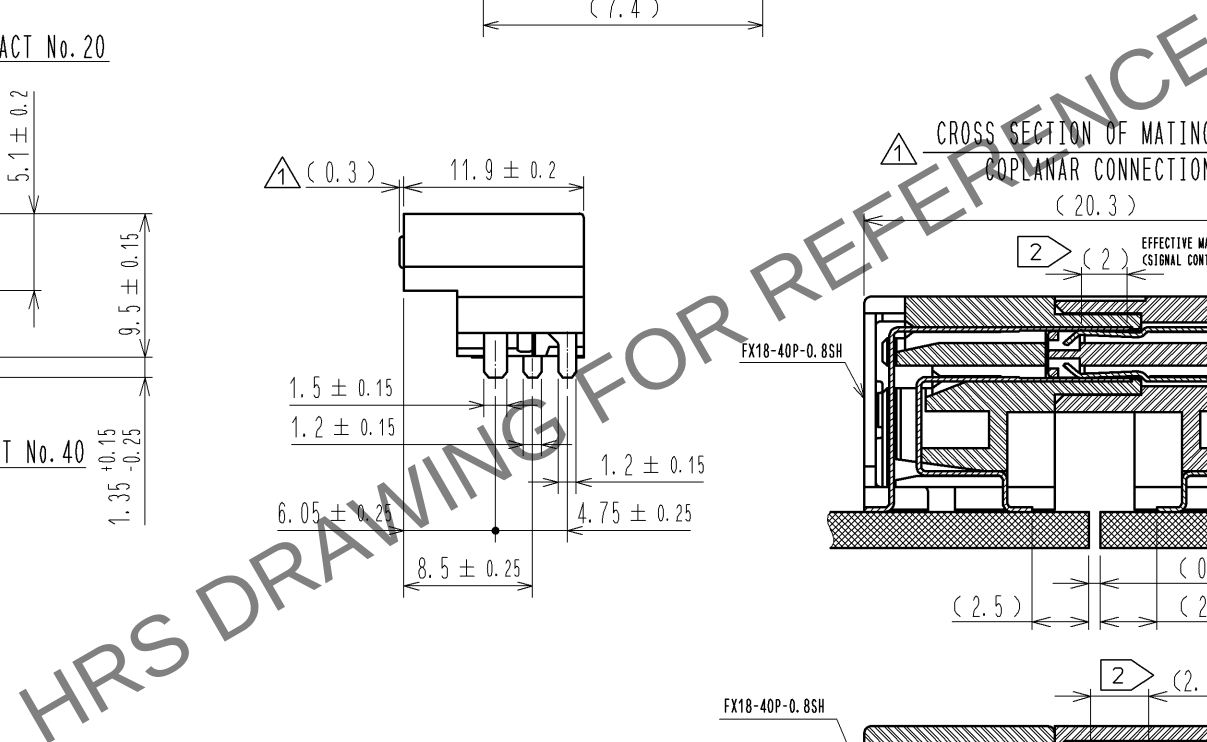

② CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A=>SIGNAL CONTACT=>MF CONTACT B)
WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.

3 MF CONTACT A AND MF CONTACT B CAN BE USED AS POWER SUPPLY CONTACT. (3A/PIN MAX)

④ IT SHOWS CONNECTOR'S CENTRE OF GRAVITY AND VACUUM PICKUP AREA.

⑤ THIS IS PACKAGED IN TRAY. (70psc/TRAY)

UNITS mm		SCALE 2 : 1	COUNT 7	DESCRIPTION OF REVISIONS DIS-F-005578	DESIGNED TH. SANO	CHECKED KI. HIROKAWA	DATE 11. 07. 21
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	09. 10. 09	DRAWING NO.	EDC3-159081-00		
		CHECED : KI. HIROKAWA	09. 10. 09	PART NO.	FX18-40S-0. 8SH		
		DESIGNED : TH. SANO	09. 10. 09	CODE NO.	CL579-0009-4-00		
		DRAWN : TH. SANO	09. 10. 09				

