

AMS1117 Series

1A LDO Voltage Regulator

WWW.TECHPUBLIC.COM

DESCRIPTION

The AMS1117 is a positive low voltage dropout regulator; typical voltage dropout is only 1.2V at 1A.

AMS1117 provides two versions: fixed and adjustable versions. The output accuracy of the adjustable voltage version is 1.5%. The output accuracy of the fixed voltage version is 2%.

The AMS1117 offers some key features include thermal shutdown and current limiting. It is suitable for all electronic products.


APPLICATIONS

- ◆ Laptop, Palmtop, and Notebook Computers
- ◆ Battery Charger
- ◆ SCSI-II Active Terminator
- ◆ Cellular Phone
- ◆ Cordless Telephones
- ◆ Battery Powered Systems
- ◆ Portable Instrumentation
- ◆ SMPS Post-Regulator

FEATURES

- ◆ The output accuracy of fixed versions 1.2V, 3.3V, and 5.0V is 2%, and the output accuracy of adjustable versions is 1.5%
- ◆ Adjustable output voltage
- ◆ Low Dropout Voltage: Typical 1.2V@1A
- ◆ Current Limiting
- ◆ Thermal Shutdown
- ◆ Temperature Range: -40°C to 125°C

PIN CONFIGURATION

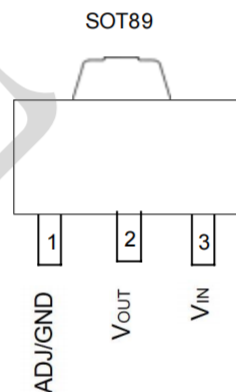

PIN DESCRIPTION

Pin No.	Pin name	I/O	Functions
1	GND/ADJ	—/O	Ground/ADJ
2	VOUT	O	Output voltage
3	VIN	I	Input supply voltage


NOMENCLATURE

AMS1117 -XX X

PACKAGE TYPE
S:SOT89

OUTPUT VOLTAGE
ADJ: Adjustable output
1.2: 1.2V
3.3: 3.3V
5.0: 5.0V

BLOCK DIAGRAM

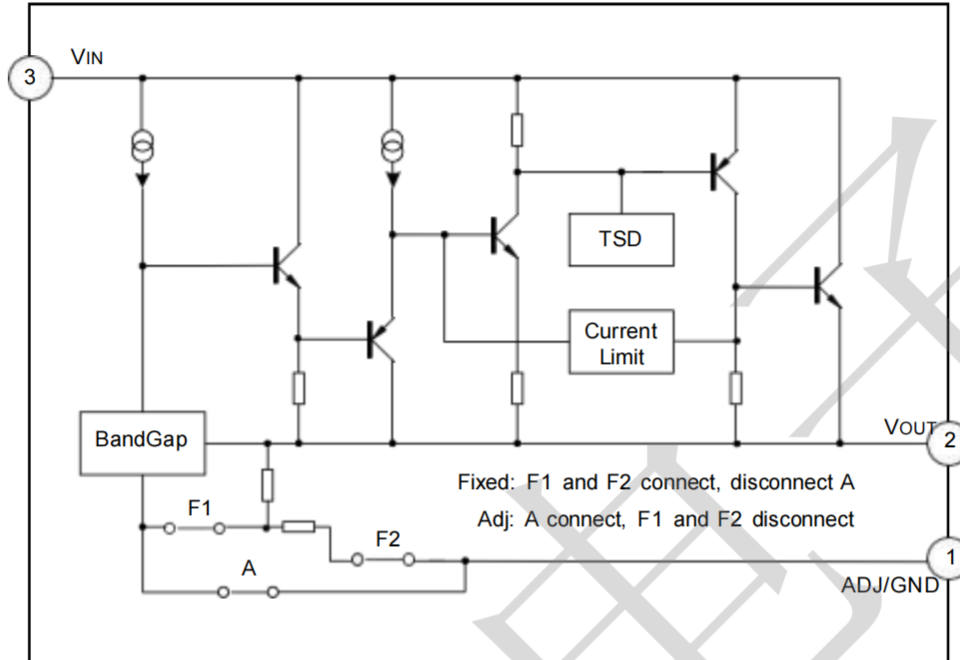

ABSOLUTE MAXIMUM RATINGS

Characteristics	Symbol	Rating	Unit
Input Supply Voltage	V_{IN}	18	V
Lead Temperature (Soldering, 5 seconds)	T_{Lead}	260	°C
Operating Junction Temperature Range	T_J	150	°C
Storage Temperature Range	T_{stg}	-65 ~ +150	V
Power Dissipation	P_D	Internally Limited (Note1)	mW
Thermal Resistance from Junction to Ambient	R_{ja}	102	°C/W
ESD Tolerance (Minimum)	ESD	2000	V

Note1: The maximum allowable power dissipation is a function of maximum operating junction temperature, T_J (max), the junction to ambient thermal resistance, R_{ja} , and the ambient temperature T_{amb} . The maximum allowable power dissipation at any ambient temperature is given: $P_{D(max)} = (T_J(max) - T_{amb}) / R_{ja}$, exceeding the maximum allowable power limit will result in excessive die temperature; thus, the regulator will go into thermal shutdown. The junction to ambient thermal resistance, θ_{JA} of some packages may be different, The value of θ_{JA} depends on mounting technique.

RECOMMENDED OPERATING CONDITIONS

Characteristics	Symbol	Rating	Unit
Input voltage	V_{IN}	12	V
Operating Junction Temperature Range	T_J	-40 ~ +125	°C

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reference Voltage	V_{REF}	AMS1117-ADJS $I_{OUT}=10mA$, $V_{IN}-V_{OUT}=2V$, $T_J=25^{\circ}C$	1.231	1.250	1.269	V
Output Voltage	V_{OUT}	AMS1117-1.2S $I_{OUT}=10mA$, $V_{IN}=3.2V$, $T_J=25^{\circ}C$	1.176	1.2	1.224	V
		AMS1117-3.3S $I_{OUT}=10mA$, $V_{IN}=5V$, $T_J=25^{\circ}C$	3.234	3.300	3.366	V
		AMS1117-5.0S $I_{OUT}=10mA$, $V_{IN}=7V$, $T_J=25^{\circ}C$	4.900	5.000	5.100	V
Output Voltage Temperature Stability	TS_{OUT}		--	0.3	--	%
Line Regulation	R_{line}	$V_{INMIN} \leq V_{IN} \leq 12V$, $V_{OUT}=\text{Fixed/Adj}$, $I_{OUT}=10mA$	--	9	18	mV
Load Regulation	R_{load}	$10mA \leq I_{OUT} \leq 1A$, $V_{OUT}=\text{Fixed/Adj}$	--	10	18	mV
Dropout Voltage	V_{drop}	$I_{OUT}=100mA$ $I_{OUT}=500mA$ $I_{OUT}=1A$	--	1.00 1.05 1.20	1.20 1.25 1.30	V
Quiescent Current	I_q	$4.25V \leq V_{IN} \leq 6.5V$	--	5	10	mA
Ripple Rejection	$PSRR$	$f_{RIPPLE}=120Hz$, $(V_{IN}-V_{OUT})=3V$, $V_{RIPPLE}=1V_{PP}$	60	75	--	dB
Adjust pin Current	I_{adj}		--	60	120	μA
Adjust pin Current Change		$0 \leq I_{OUT} \leq 1A$, $1.4V \leq V_{IN}-V_{OUT} \leq 10V$	--	0.2	5	μA
Thermal shutdown	TSD		--	150	--	$^{\circ}C$
Current limiting	I_{limit}		2.1	--	2.5	A
Temperature Stability			--	0.5	--	%
Long Term Stability		$T_A=125^{\circ}C$, 1000Hrs	--	0.3	--	%

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
RMS Output Noise		% of V_{OUT} , $10\text{Hz} \leq f \leq 10\text{kHz}$	--	0.003	--	%

FUNCTION DESCRIPTION

The AMS1117 is a LDO regulator, its pass transistor is made up of a single NPN transistor being driven by a PNP.

The dropout voltage is defined as: $V_{DROP} = V_{BE} + V_{SAT}$.

The AMS1117 series of fixed and adjustable regulators are easy to use. Output voltages are 1.2V, 1.3V, and 5.0V. On-chip thermal shut down provides protection against any combination of overload and ambient temperature that would create excessive junction temperature.

The AMS1117 requires an output capacitor for device stability. Its value of 22 μF tantalum covers all cases of bypassing the adjustment terminal. Without bypassing the adjustment terminal smaller capacitors can be used with equally good results which depend upon the application circuit. In general, linear regulator stability decreases with higher output currents.

TYPICAL APPLICATION CIRCUIT

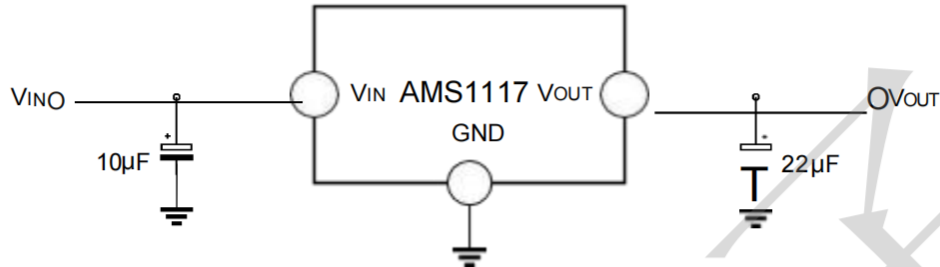


Figure 1. Typical Fixed Output Voltage



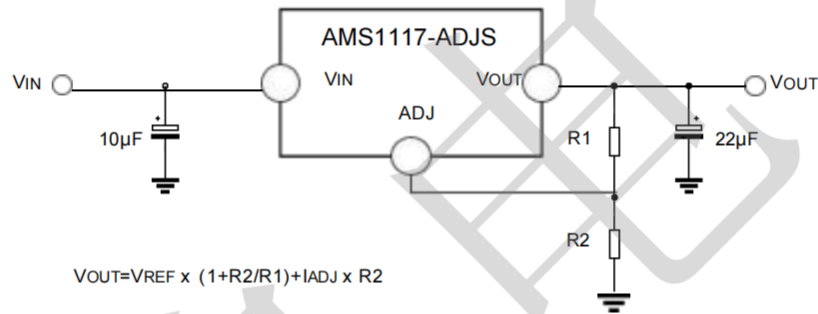


Figure 2. Typical Adjustable Output Voltage

Note: The circuit and parameters are reference only, please set the parameters of the real application circuit based on the real test.

TYPICAL CHARACTERISTICS

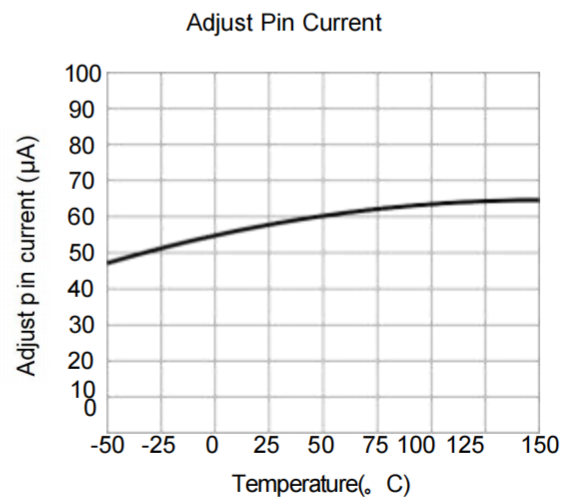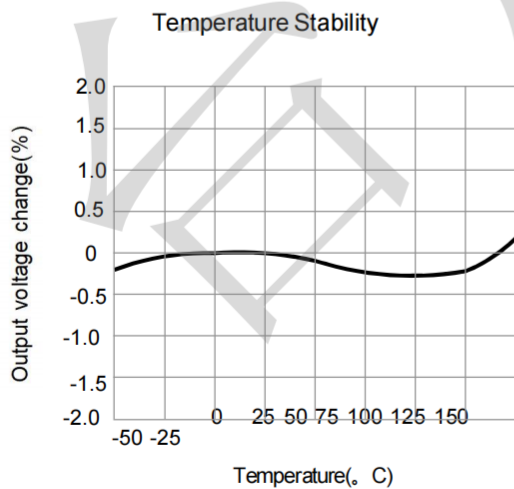


AMS1117 Series 1A LDO Voltage Regulator


WWW.TECHPUBLIC.COM

TYPICAL CHARACTERISTICS CURVES(continued)


$V_{OUT}=5\text{ V}$ Load Transient Response

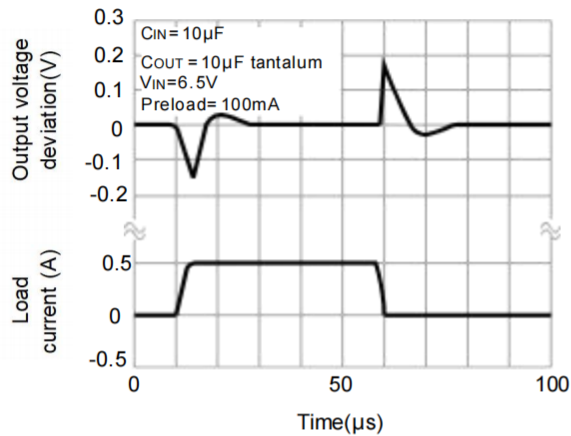


$V_{OUT}=5\text{ V}$ Line Transient Response

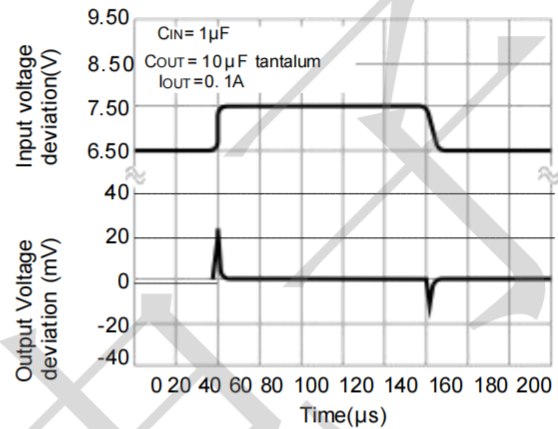


Ripple Rejection VS Current

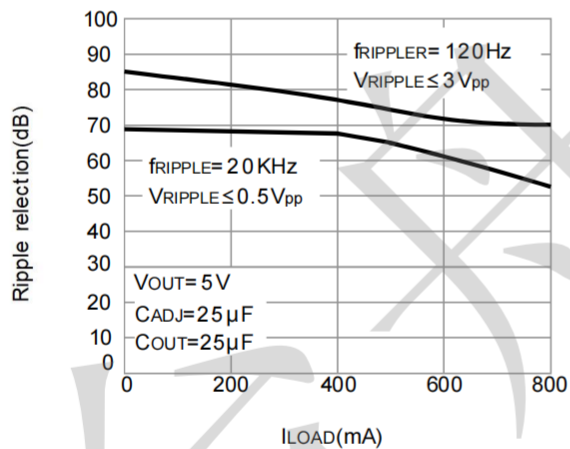

Power Dissipation VS Ambient Temperature(SOT-223)

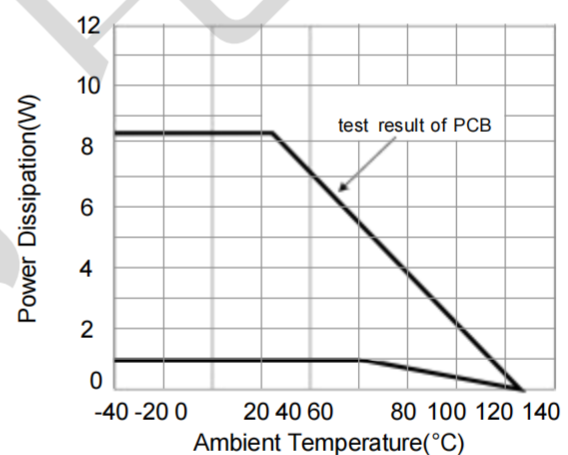


Power Dissipation VS Ambient Temperature(TO-252)

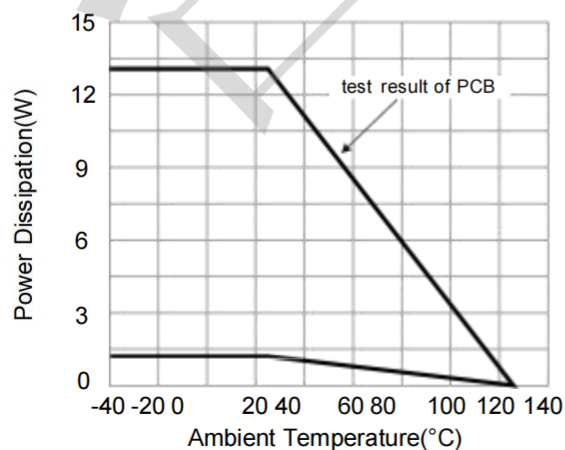

Package Outline Dimensions (unit:mm)

SOT-89

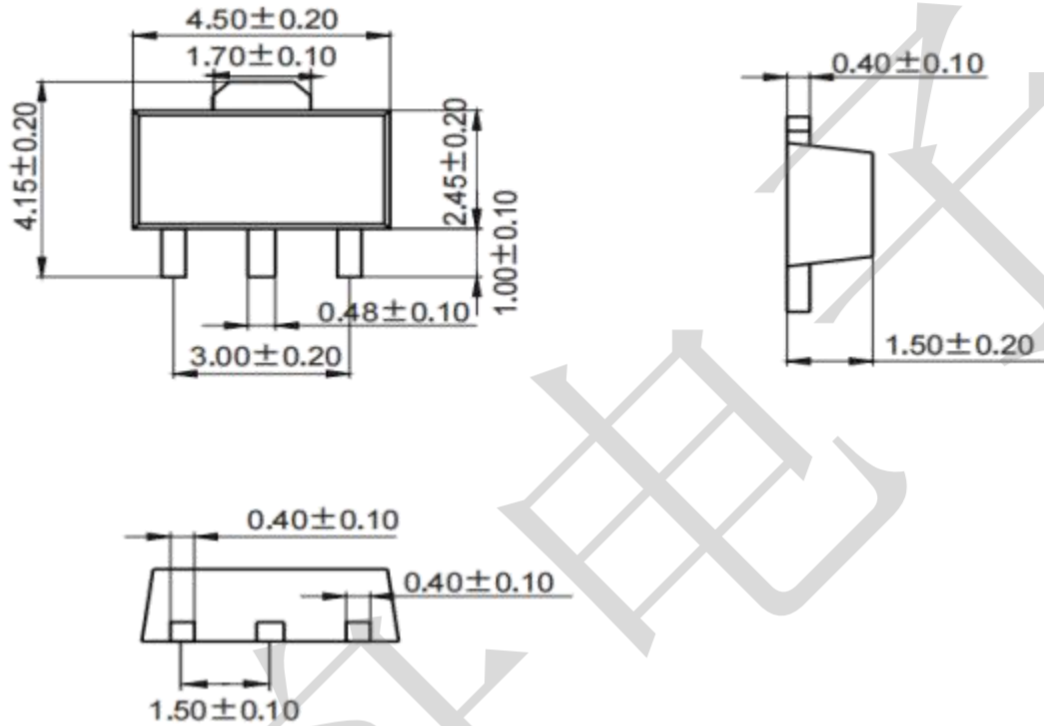

Mounting Pad Layout (unit: mm)

