


# THERMOSTAT PROBES

PTC and NTC probes are used for temperature measurement with thermostats.

## Probe Order Code:

E-PTC-LPS-1.5S (Stainless steel PTC liquid probe with 1,5m silicon cable )

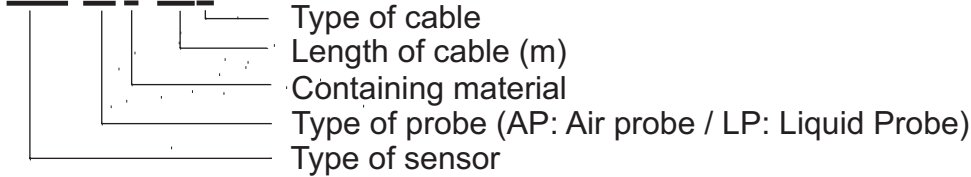

## Technical


Type of Sensor	Sensor Code	Range	Accuracy
NTC	NTC	-50... +110°C	±0.3°C
PTC	PTC	-50... +150°C	±6°C

Shell Material	Shell Material Code	Range
Stainless Steel	S	-80... +600°C
Thermoplastic	T	-50... +105°C
Plastic	P	-55... +80°C


Type of Cable	Cable Code	Range
Silicon	S	-60... +200°C
Thermoplastic	T	-50... +105°C
PVC	P	-30... +80°C

## Dimensions


### Stainless Steel Air Probe

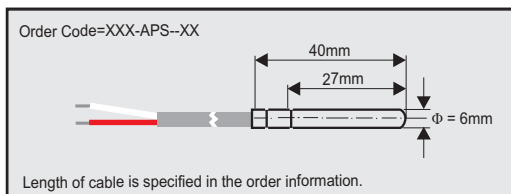

### Plastic Air Probe

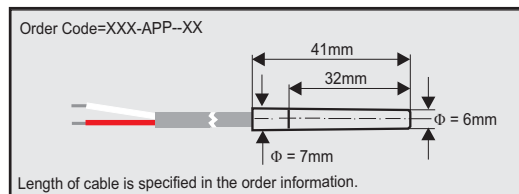

### Thermoplastic Air Probe

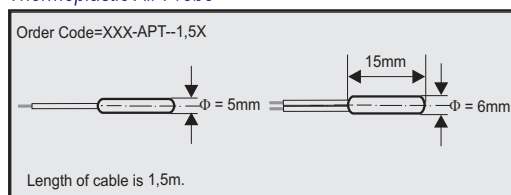

### Stainless Steel Liquid Probe

