

SMD Power Inductor

CDRH148R



Description

- Ferrite drum core construction
- Magnetically shielded
- L × W × H: 15.0 × 15.0 × 8.5 mm Max.
- Product weight: 6.8g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 13" diameter reel
- 250pcs per reel


Applications

- Ideally used in Game machine, Notebook PC, LCD TV, DVD, STB, Projector etc as DC-DC converter inductors.

Dimension - [mm]

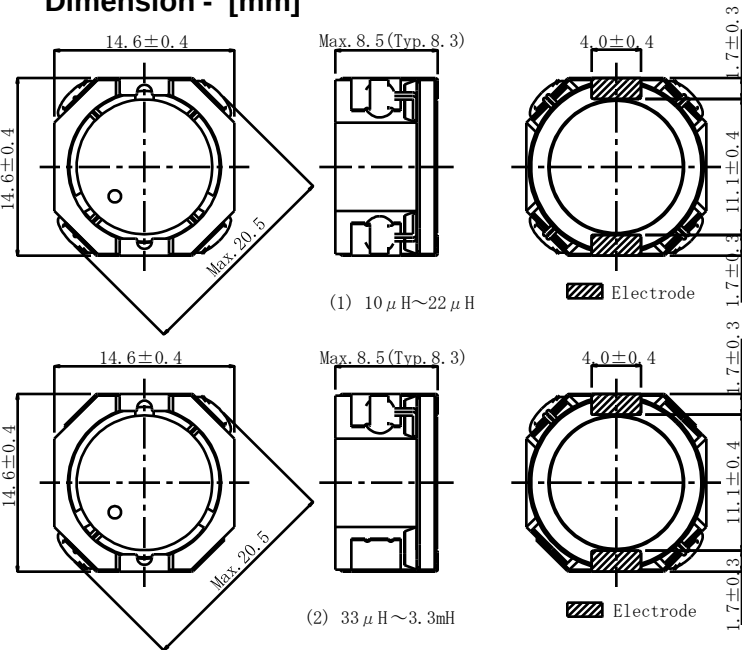


Land pattern and Schematics - [mm]

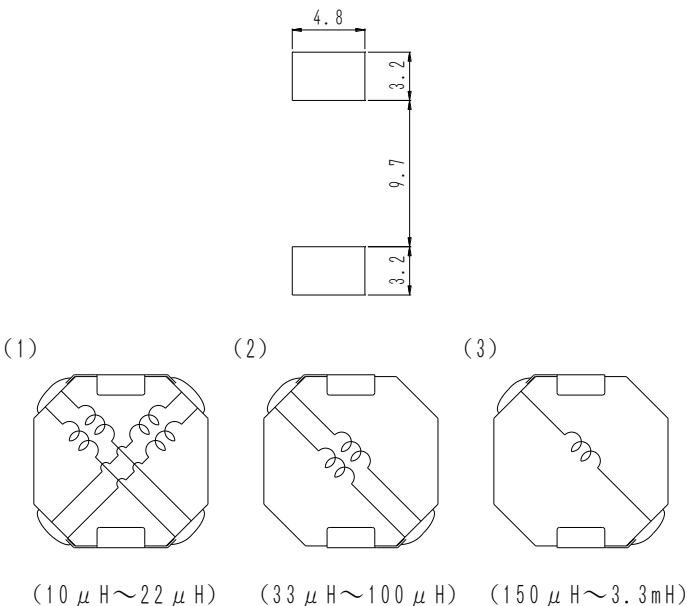

SMD Power Inductor

CDRH148R



Electrical Characteristics

Part No.	Stamp	Inductance (μ H) [within] ※1	D.C.R. (Ω) [Max.] (Typ.) (at 20°C)	Saturation Current (A) ※2		Temperature Rise Current (A) ※3
				at 20°C	at 105°C	
CDRH148RNP-100MC	100	$10 \pm 20\%$	9.6m(7.7m)	10.8	7.30	7.80
CDRH148RNP-150MC	150	$15 \pm 20\%$	15m(12m)	8.40	5.70	6.10
CDRH148RNP-220MC	220	$22 \pm 20\%$	22m(18m)	7.20	4.90	5.00
CDRH148RNP-330MC	330	$33 \pm 20\%$	33m(27m)	5.80	3.90	4.10
CDRH148RNP-470MC	470	$47 \pm 20\%$	50m(40m)	4.90	3.30	3.20
CDRH148RNP-680MC	680	$68 \pm 20\%$	71m(57m)	4.00	2.70	2.70
CDRH148RNP-101MC	101	$100 \pm 20\%$	96m(77m)	3.30	2.20	2.40
CDRH148RNP-151MC	151	$150 \pm 20\%$	140m(112m)	2.80	1.90	2.00
CDRH148RNP-221MC	221	$220 \pm 20\%$	208m(167m)	2.30	1.50	1.60
CDRH148RNP-331MC	331	$330 \pm 20\%$	305m(244m)	1.90	1.30	1.30
CDRH148RNP-471MC	471	$470 \pm 20\%$	415m(332m)	1.60	1.00	1.10
CDRH148RNP-681MC	681	$680 \pm 20\%$	592m(474m)	1.30	0.86	0.93
CDRH148RNP-102MC	102	$1000 \pm 20\%$	0.81(0.65)	1.00	0.70	0.74
CDRH148RNP-152MC	152	$1500 \pm 20\%$	1.31(1.05)	0.88	0.59	0.61
CDRH148RNP-222MC	222	$2200 \pm 20\%$	1.89(1.51)	0.71	0.48	0.48
CDRH148RNP-332MC	332	$3300 \pm 20\%$	2.76(2.21)	0.57	0.38	0.39

※1 Inductance measuring condition: at 100kHz .

※2 Saturation current: The value of DC current when the inductance decreases to 65% of its nominal.


※3 Temperature rise current: The value of DC current when the temperature rise is $\Delta T = 40^\circ\text{C}$ ($T_a = 20^\circ\text{C}$).

SMD Power Inductor CDRH148R



Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

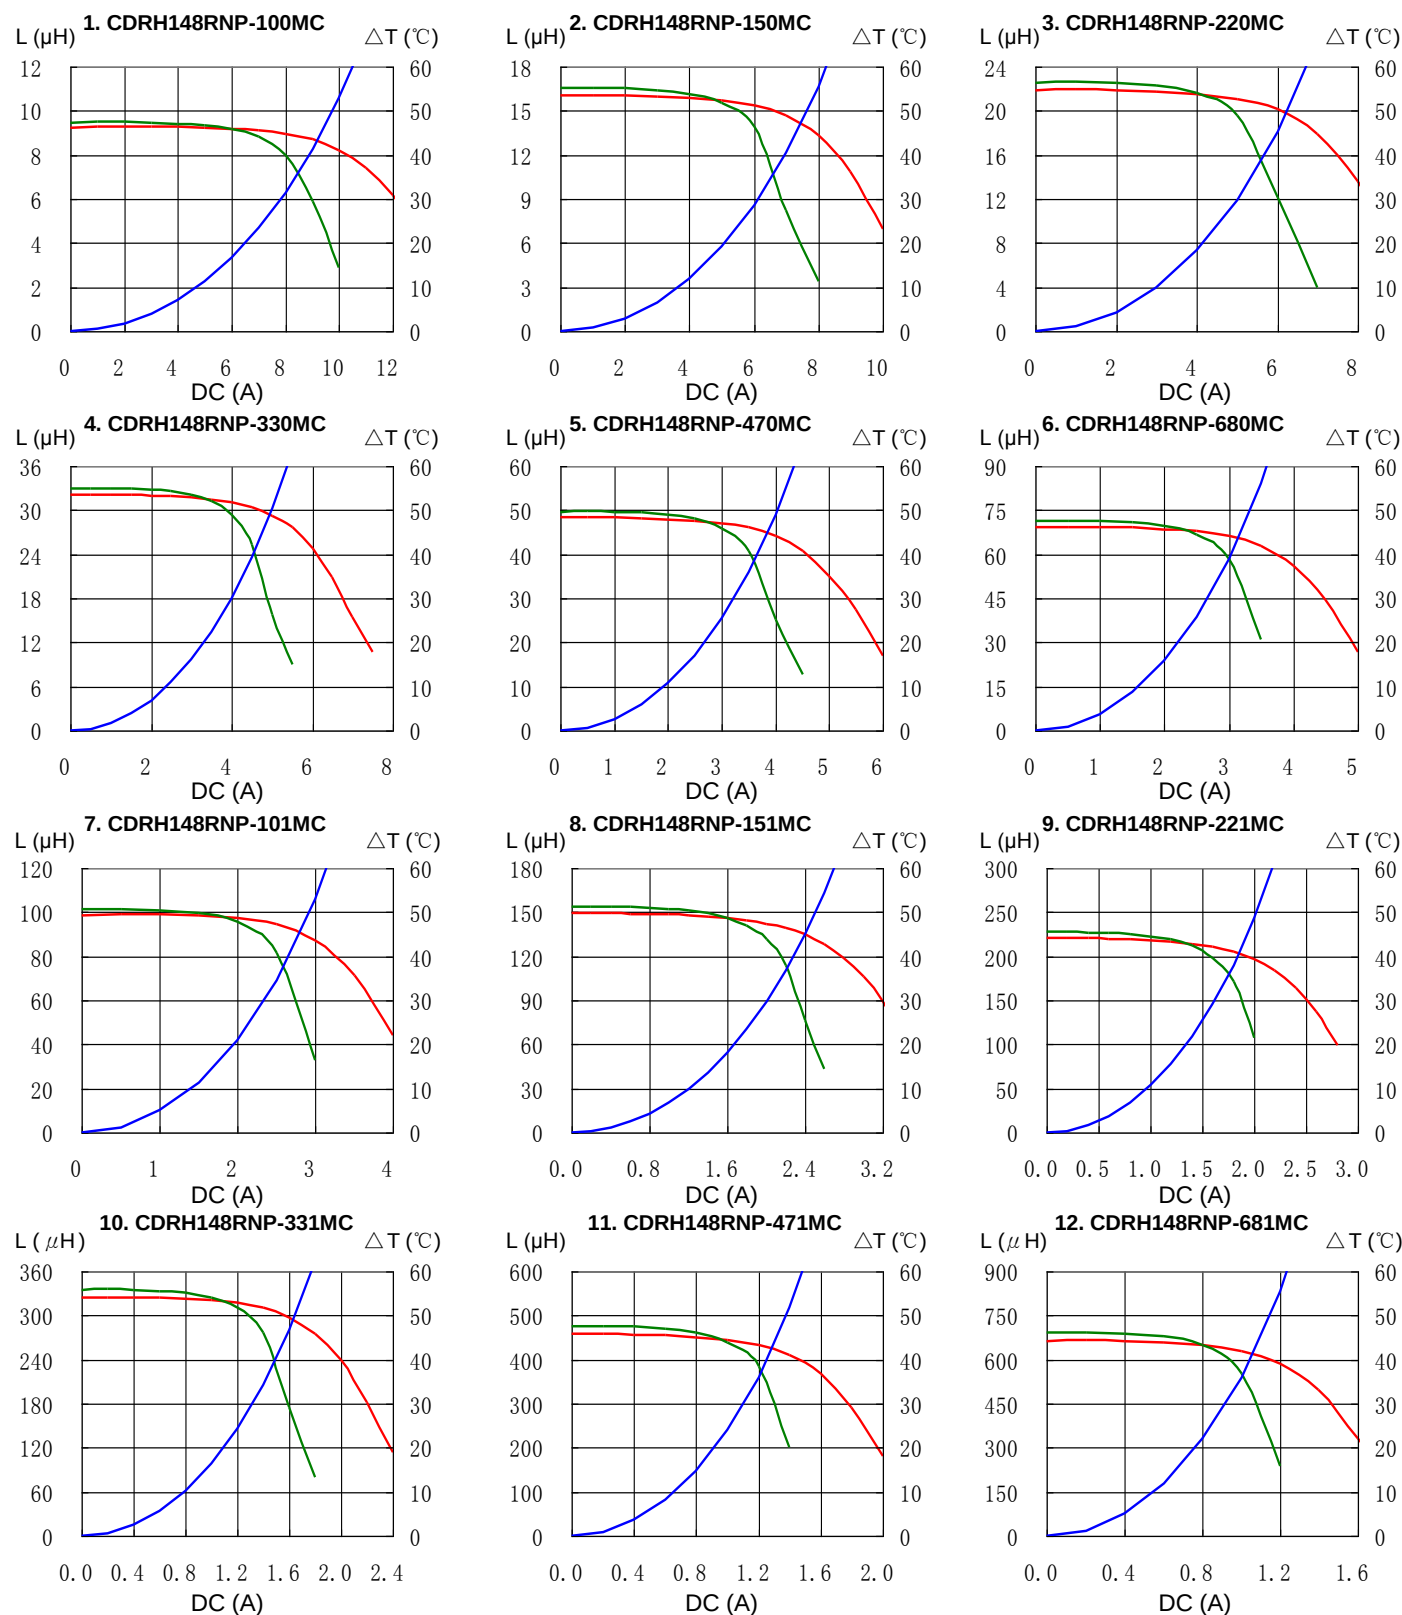


SMD Power Inductor CDRH148R




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT


13. CDRH148RNP-102MC

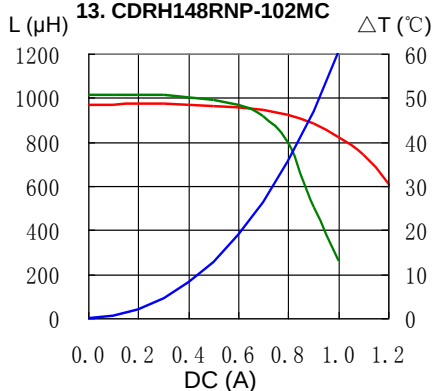


14. CDRH148RNP-152MC

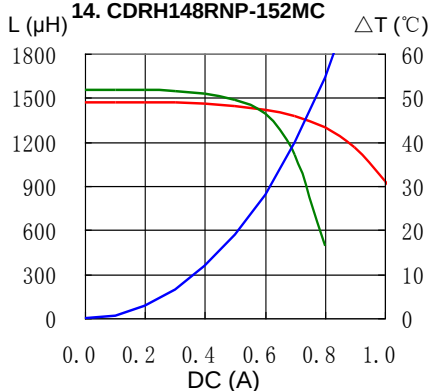

15. CDRH148RNP-222MC

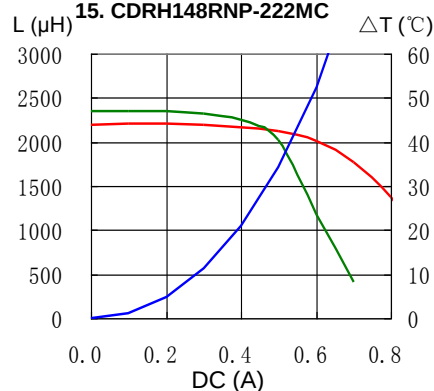


16. CDRH148RNP-332MC

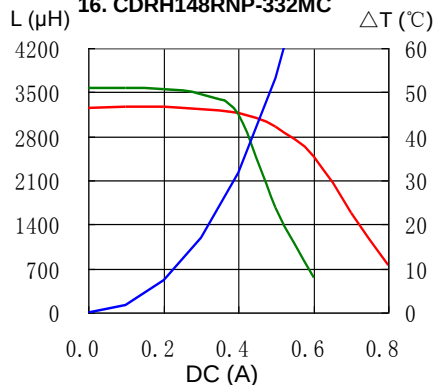


Solder Reflow Condition

Heat Endurance

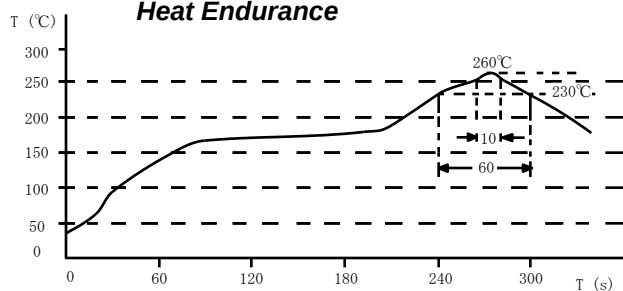

Temperature Chart

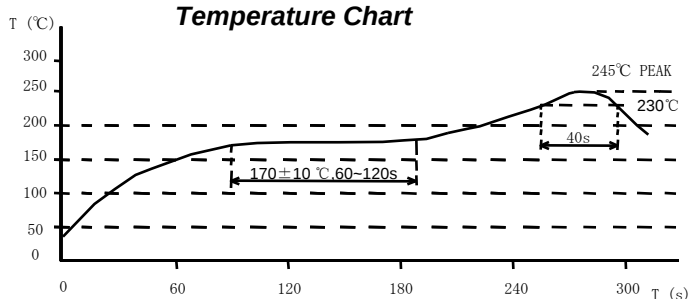

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com