



ELECTRO-OPTICAL CHARACTERISTICS  $T_A = 25^\circ\text{C}$

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
COLLECTOR DARK CURRENT	$I_{ced}$	$V_{ce} = 10\text{V}$ $E_e = 0\text{mw/cm}^2$			100	nA
COLLECTOR LIGHT CURRENT	$I_c$	$V_{ce} = 5\text{V}$ $E_e = 1.0\text{mw/cm}^2$		0.3		mA
COLLECTOR-EMITTER SATURATION VOLTAGE	$V_{ce(sat)}$	$I_c = 0.5\text{mA}$ $E_e = 1\text{mw/cm}^2$		0.8		V
SWITCHING SPEEDS:		$V_{cc} = 5\text{V}$ $I_c = 1\text{mA}$ $R_l = 100\Omega$				
RISING TIME	$T_r$			3.0		$\mu\text{S}$
FALLING TIME	$T_f$			3.0		$\mu\text{S}$
SPECTRAL SENSITIVITY	$\lambda$			450~1100		nm
PEAK WAVELENGTH	$\lambda_p$			940		nm
ANGULAR RESPONSE	$\Delta\theta$			±45		DEG
LENS COLOR:						BLUE TRANSPARENT

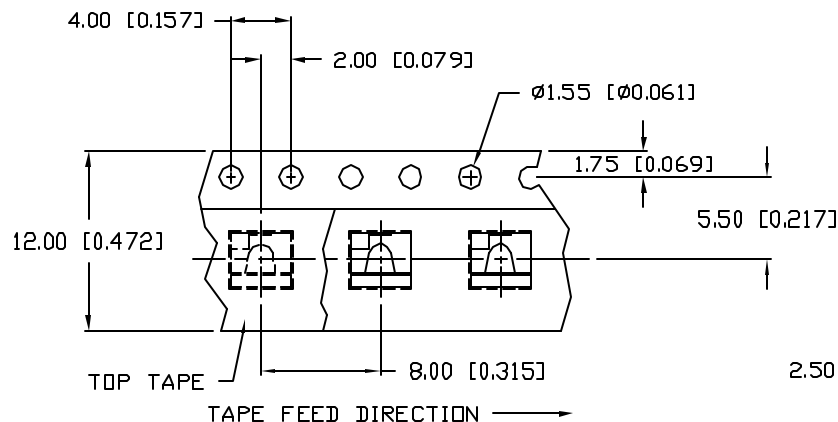

RECOMMENDED SOLDER PAD LAYOUT

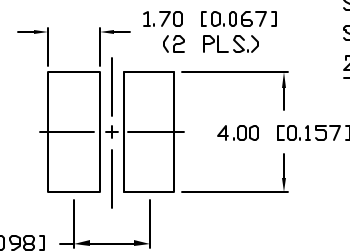

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
COLLECTOR-EMITTER VOLTAGE	30	V
EMITTER-COLLECTOR VOLTAGE	5	V
POWER DISSIPATION	100	mW
OPERATING TEMP.	-40 TO +85	°C
STORAGE TEMP.	-40 TO +85	°C
SOLDERING TEMP.	+260	°C
2.0mm FROM BODY		5 SEC. MAX

NOTES:

- 500 PIECES PER REEL.
- THE CATHODE IS ORIENTED TOWARDS THE TAPE SPROCKET HOLE.



\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=+0.00 PRECISION -0.00, MAX.=+0.00 -DECIMAL PRECISION

REV.

PART NUMBER

OED-STR44B90-TR

RIGHT ANGLE BOOMERANG SURFACE MOUNT  
PHOTO TRANSISTOR, BLUE TRANSPARENT LENS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD  
PALATINE, IL 60067-6976  
PHONE: +1.847.359.2790  
US WEB: www.lumex.com  
TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 5.23.05

JD

PAGE: 1 OF 1

SCALE: N/A