



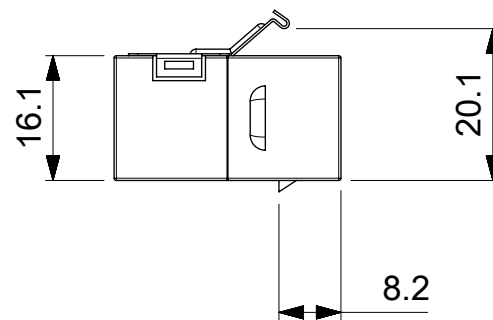


RECOMMENDED
PANEL OPENING

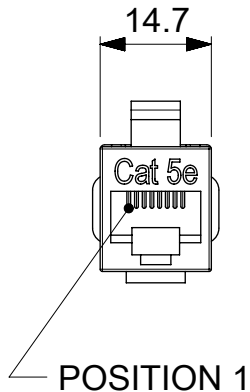

WIRING	
PIN1	PIN1
PIN2	PIN2
PIN3	PIN3
PIN4	PIN4
PIN5	PIN5
PIN6	PIN6
PIN7	PIN7
PIN8	PIN8
SHIELD	SHIELD

MATERIAL	
HOUSING	ABS, UL94V-0
CONTACTS	PHOSPHOR BRONZE TIN PLATED
CONTACT PLATING	GOLD, OVER NICKEL PLATE
SHIELD	BRONZE WITH NICKEL PLATE
ELECTRICAL	
DC CURRENT RATING	1A
VOLTAGE RATING	50V AC/DC
MISCELLANEOUS	
RATING	CATEGORY 5E (EIA /TIA CAT 5E)
ALL DIMENSIONS ARE FOR REFERENCE ONLY	

QUALITY SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
▽ = 0	EC NO: 168789 DRWN: AKHEMIRI CHK'D: DMERONI REV APPR: AMELZI	2017/11/28 2017/11/29 2017/11/29	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ±	DIMENSION UNITS mm	SCALE 1:1	molex®				2500.0010.0 STRAIGHT SNAP-IN COUPLER RJ45 - RJ45 JACK FULLY SHIELDED CAT 5E					
▽ = 0						4 PLACES ±	DRWN BY	AKHEMIRI		DATE	2017/11/28		PRODUCT CUSTOMER DRAWING		
▽ = 0						3 PLACES ±	CHK'D BY	DMERONI		DATE	2017/11/29		SERIES	MATERIAL NUMBER	CUSTOMER
▽ = 0						2 PLACES ±	APPR BY	AMELZI		DATE	2017/11/29		93606	936060259	GENERAL MARKET
▽ = 0						1 PLACE ±	DRAWING SIZE		FIRST ANGLE PROJECTION						
▽ = 0						0 PLACES ±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		A4						
▽ = 0						DOCUMENT NUMBER		DOC TYPE	DOC PART	SHEET NUMBER					
	A	REV				936060259		PSD	000	1 OF 1					