

## Interface module - VIP-2/PT/D15SUB/F - 2903780

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




VARIOFACE module, with push-in connection and D-SUB miniature socket strip, for mounting on NS 35 rails, 15-pos.



COMPLIANT

### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 796552
GTIN	4046356796552

### Technical data

#### Dimensions

Width	46.9 mm
Height	72.1 mm
Depth	63 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Nominal voltage $U_N$	25 V AC
	60 V DC
Max. perm. current (per branch)	2 A
Number of positions	15
Status display	No
Mounting position	any

#### Connection data

Connection name	Field level
Connection method	Push-in connection

## Interface module - VIP-2/PT/D15SUB/F - 2903780

### Technical data

#### Connection data

Stripping length	8 mm
Conductor cross section solid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	26 ... 14

#### Connection data 2

Connection name	Controller level
Connection method	D-SUB socket strip
Number of connections	1
Number of positions	15

#### Standards and Regulations

Connection in acc. with standard	CSA
Standards/regulations	IEC 60664
	DIN EN 50178
Rated surge voltage	1.2 kV
Pollution degree	2
Overvoltage category	II


#### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

### Drawings

# Interface module - VIP-2/PT/D15SUB/F - 2903780

Circuit diagram

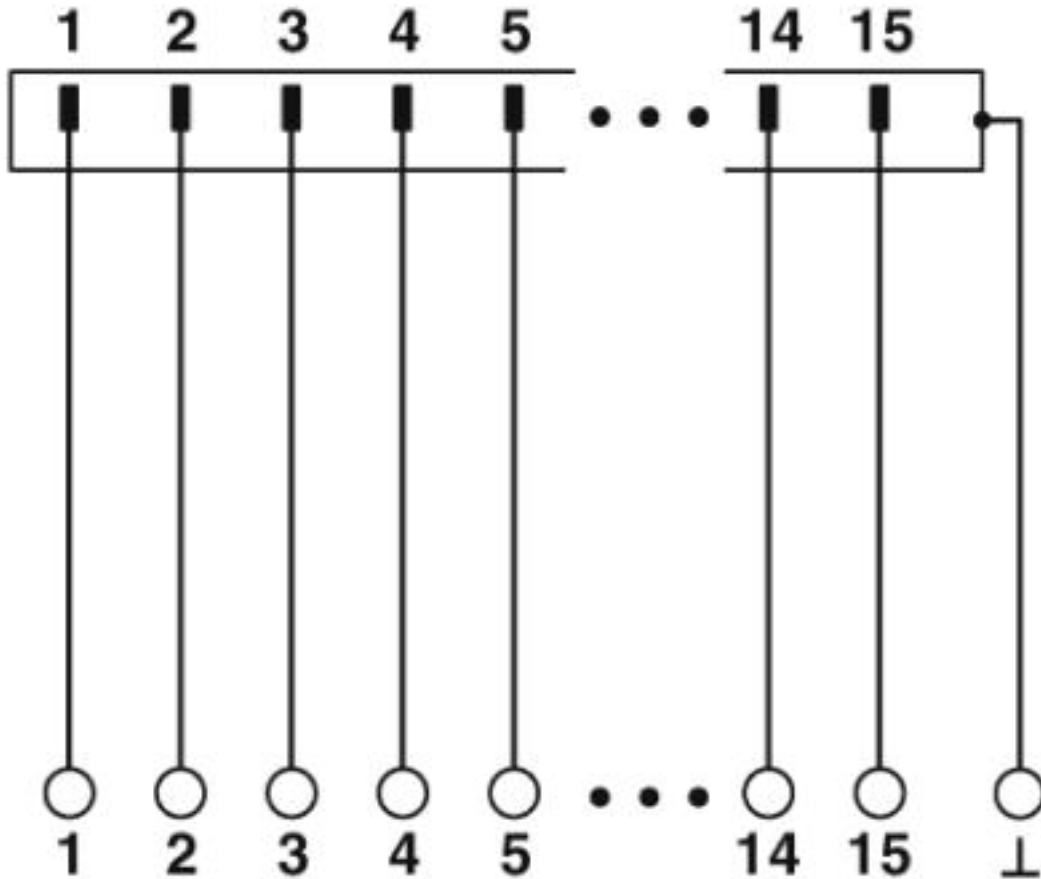

## Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / CSAus / EAC / cULus Recognized / cCSAus

Ex Approvals

## Approval details

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	2122203
Nominal voltage UN		105 V	

## Interface module - VIP-2/PT/D15SUB/F - 2903780

### Approvals

Nominal current IN	2 A
mm <sup>2</sup> /AWG/kcmil	26-14

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN	125 V		
Nominal current IN	2 A		
mm <sup>2</sup> /AWG/kcmil	26-14		

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN	125 V		
Nominal current IN	2 A		
mm <sup>2</sup> /AWG/kcmil	26-14		

CSAus		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	2122203
Nominal voltage UN	105 V		
Nominal current IN	2 A		
mm <sup>2</sup> /AWG/kcmil	28-14		

EAC			RU C- DE.A*30.B.01742
-----	--	--	--------------------------

cULus Recognized			
------------------	--	--	--

cCSAus			
--------	--	--	--

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>