
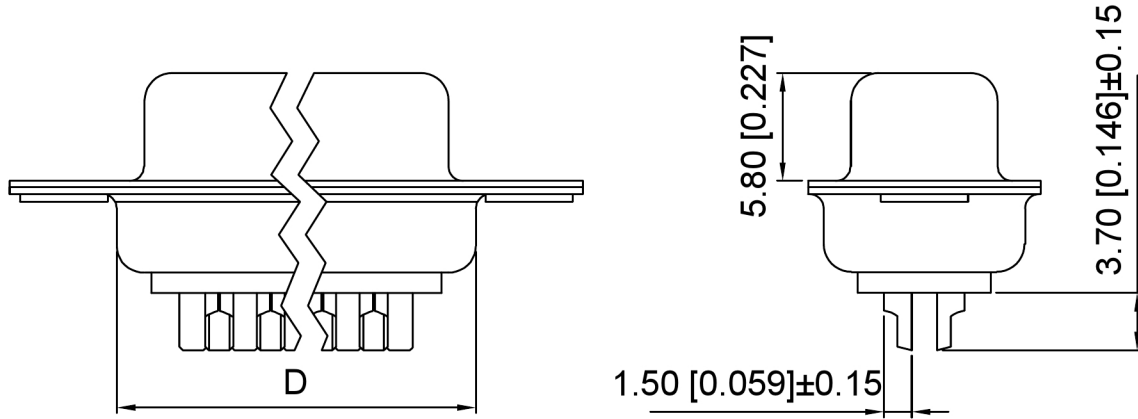


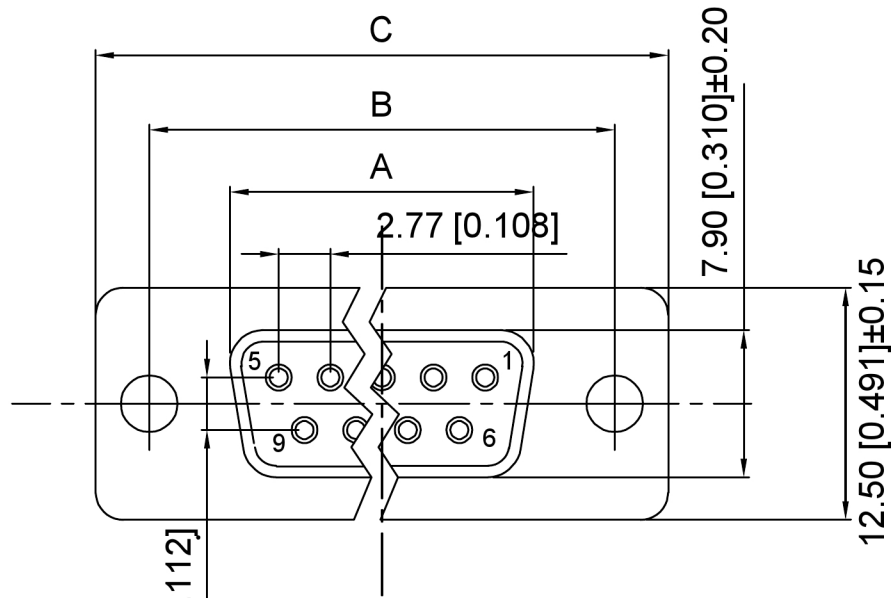

Specifications:

规格:

1.Voltage rating:250VAC/DC

额定电压: 250V AC/DC

2.Current rating:3A AC/DC

额定电流: 3A AC/DC

3.Withstanding voltage:500V AC/minute

耐受电压: 500V AC/分钟

4.Temperature range: -55℃~+105℃

温度范围: -55℃~+105℃

5.Insulation resistance:1000MΩ MIN

绝缘电阻: 1000MΩ MIN

6.Contact resistance:30mΩ Max

接触电阻: 30mΩ Max

Material:

材料:

7.Rubber core:PBT UL94V-0

胶芯: PBT UL94V-0

8.The iron shell:SPCC-SD Nivkel Plating/Tin Plating/Gold Plating

铁壳: SPCC-SD, 镀镍/镀锡/镀金

9.Terminal:Copper alloy

端子: 铜合金

X01 XX F X X X X
① ② ③ ④ ⑤ ⑥ ⑦

① Series NO.

② Row No.Pin No.XX-09;15;25;37

③ Welding Board Angle :F-Female

④ T: Tradutional C: Car-pin

⑤ Planting Categoty: 1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:AuSn

⑥ Color:B-BLACK W-White BL-Blue

⑦ 1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4

NUMBER OF POSITIONS	DIMENSION			
	A±0.25	B±0.13	C±0.38	D±0.25
9	16.35	24.99	30.80	19.28
15	24.75	33.30	39.20	27.65
25	38.35	47.04	53.05	41.28
37	54.75	63.50	69.40	57.71

耦合方式	TYPE-1: 耦合	TYPE-2: 前脚实心螺母	TYPE-3: 后脚空心螺母	TYPE-4: 后脚空心螺母锁螺丝
图示				

广东星坤科技股份有限公司	
审核	日期
生效	日期
MARK	DESCRIPTION
文件工程章	

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR				±5°
L≤ 4				±0.2
4<L≤ 16				±0.3
16<L≤ 63				±0.4
L> 63				±0.5

DSND		SCALE: N/A	MODEL TYPE: D-SUB
DWN		VIEW:	PART NO.: X01XXFXXXX
CHKD		UNIT: mm/in	DWG NO.: X-X01XXFXXXX
APPD		SIZE: A4	WEIGHT
XKB INDUSTRIAL PRECISION CO.,LIMITED		SHEET 1/1	REVISIT A0