




Power Triple Lock

TE Internal #: 1971783-1

Receptacle Contact, Tin, 600 VAC, 600 VDC, 19 – 16 AWG Wire Size, .65 – 1.3 mm² Wire Size, Crimp, Phosphor Bronze, Power, Power Triple Lock

[View on TE.com >](#)

Connectors > Contacts > Connector Contacts > Receptacle Contact — POWER TRIPLE LOCK

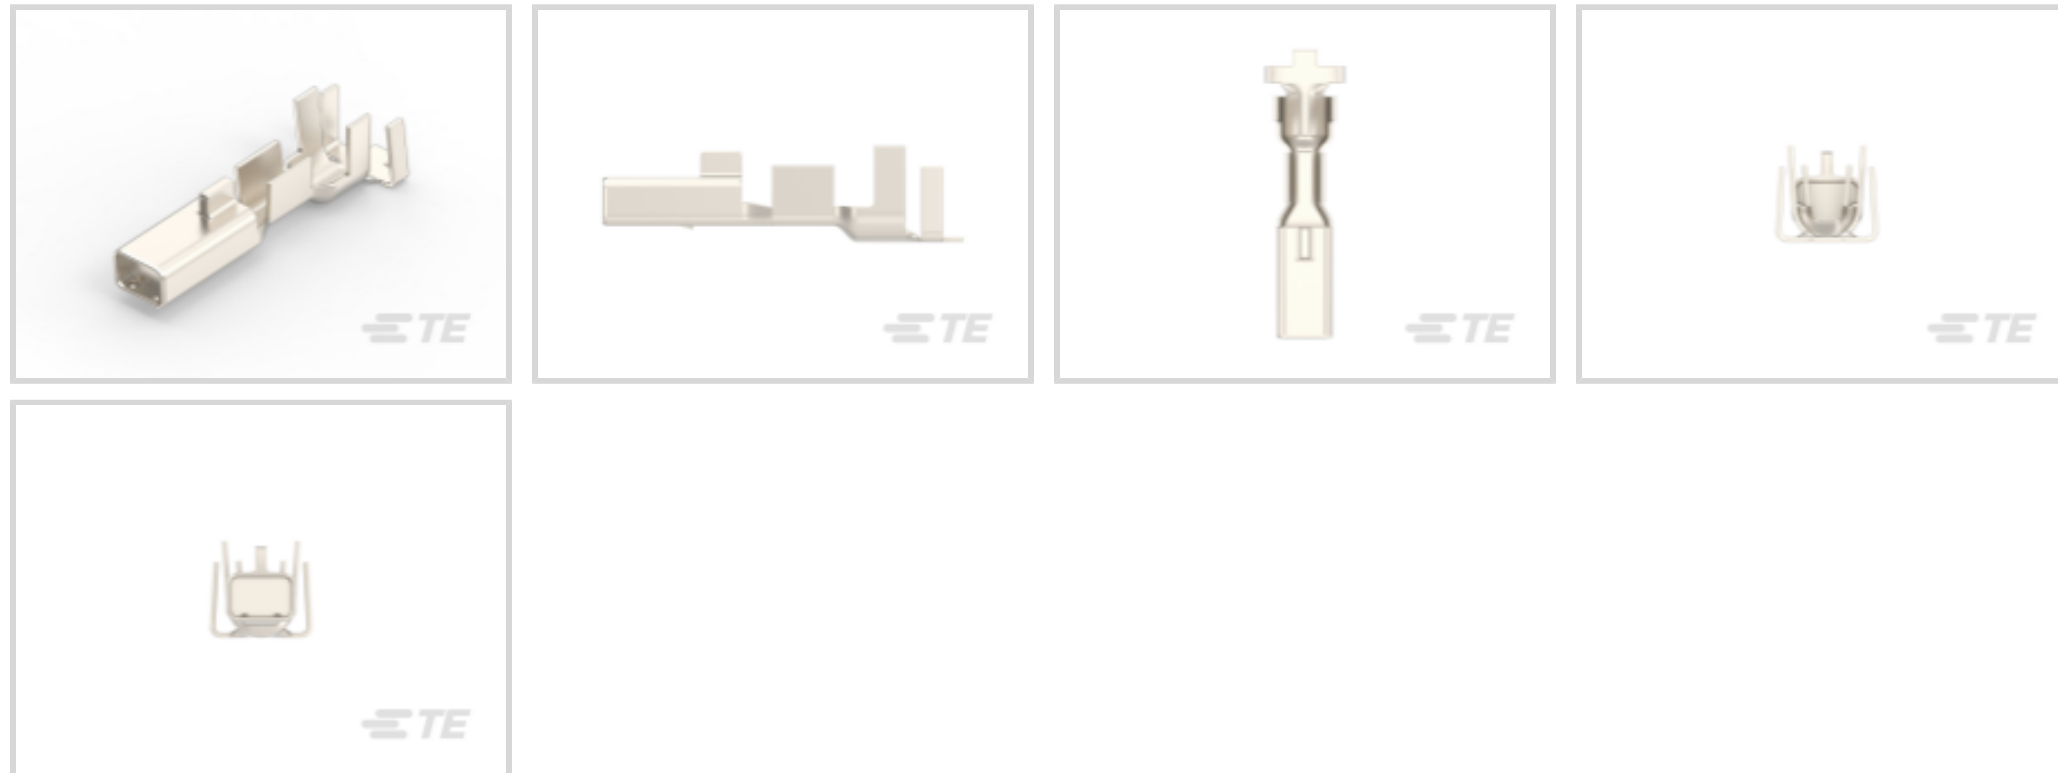

Contact Type: **Receptacle**

Contact Mating Area Plating Material: **Tin**

Wire Contact Termination Area Plating Material: **Pre-Tin**

Operating Voltage: **600 VDC**

[All Receptacle Contact — POWER TRIPLE LOCK \(11\)](#)

Features

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Contact Features

Mating Tab Width	2.7 mm[.106 in]
Mating Tab Thickness	1.63 mm[.064 in]
Wire Contact Termination Area Plating Thickness	.8 – 1.5 μm[31.49 – 59 μin]
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight
Contact Type	Receptacle
Contact Mating Area Plating Material	Tin
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Retention Within Housing	Without
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	12 A



Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Dimensions

Compatible Insulation Diameter Range	2 – 3.3 mm [.079 – .13 in]
Wire Size	.65 – 1.3 mm ²

Usage Conditions

Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Compatible With Agency/Standards Products	UL, VDE
---	---------

Packaging Features

Packaging Method	Reel
------------------	------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent

chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-P87074-P729B
POWER TRIPLE LOCK Glow Wire Plug



TE Part # CAT-P87074-P729
POWER TRIPLE LOCK Plug, Standard Temperature




TE Part # 1452426-1
EXTRACTION TOOL



TE Part # 2217208-1
SDE COMMERCIAL TOOL AND DIE



TE Part # 2151743-1
OCEAN_2.0_Applicator-S-080F140OVRSM

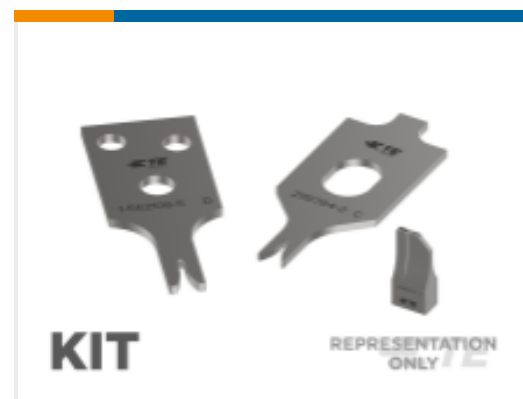

TE Part # 7-2151743-7
OCEAN_2.0_SPARE_PART_KIT-080F140OV



TE Part # 1-2232265-1
PTL 1X2 PLUG HSG HOT WIRE KEY A BLK



TE Part # 1-2232266-1
PTL 2X3 PLUG HSG HOT WIRE KEY A BLK



TE Part # 1-2232357-6
PTL 3X3 PLUG HSG HOT WIRE KEY A BLK



TE Part # 2-2232265-1
PTL 1X2 PLUG HSG HOT WIRE KEY B NAT



TE Part # 2151743-2
OCEAN_2.0_Applicator-S-080F140OVRSA



TE Part # 2217208-2
SDE DIE SET



TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp



TE Part # 2188645-1
PDL/PTL HYB 20P PLUG HSG(2R)

Also in the Series | Power Triple Lock



Connector Contacts(26)



Connector Hardware(12)



Insertion & Extraction Tools(1)



Rectangular Power Connectors(301)

Customers Also Bought



TE Part #1971782-1
PTL TAB CONTACT, 14 AWG



TE Part #1-1971772-3
Standard Temperature Caps | POWER TRIPLE LOCK



TE Part #521282-2
ULTRA-POD 250 ASSY REC 18-14 AWG TPBR



TE Part #1376395-1
5MM POWER KEY D/L PLATE GREEN



TE Part #7-2378158-2
Power Versa-Lock CAP, 1X2 KEY G




TE Part #3-1971773-4
PTL 1X4 PLUG HSG STD TEMP KEY C BLU



TE Part #81117-000
LS509-51 Liquid Level Sensor



TE Part #5-456405-6
CRIMPER, WIRE .080 F PREMIUM



TE Part #2238266-1
Housing 1 position POSI-LOCK, 250 Series

Documents

Product Drawings

PTL RECEPTACLE CONTACT, 16-19 AWG, 2X22

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1971783-1_E.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_1971783-1_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1971783-1_E.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[1-1773734-9 TE Power Triple Lock Quick Reference Guide - German](#)

German

[9-1773465-1 Power Triple Lock QRG](#)

English

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

[Instruction Sheet \(U.S.\)](#)

English

Agency Approvals

[VDE Certificate](#)

English

[VDE Certificate](#)

English