
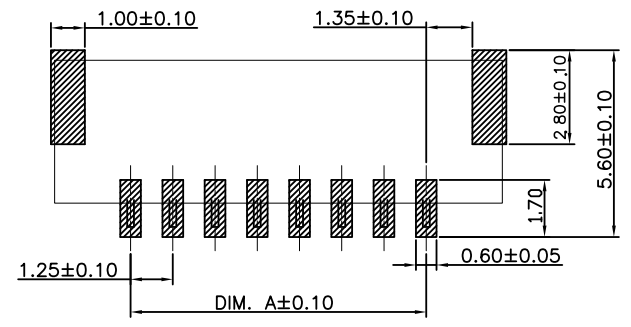
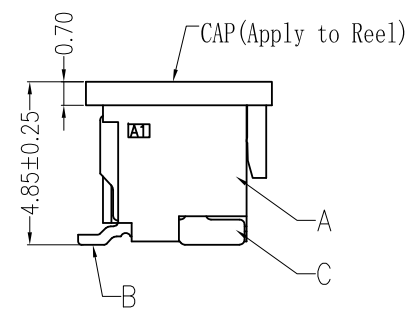





修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW DWG		2016-09-08
A1		改善簧片刮胶		2018-12-30

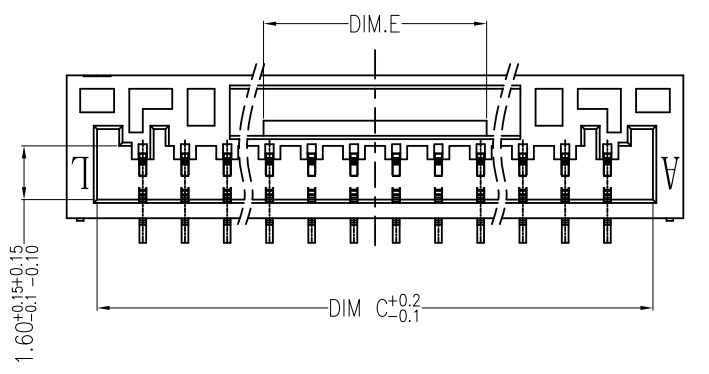

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

主要技术参数 Main Specifications

- 线数 (Poles): 02 to 15
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 100M\Omega$
- 额定电压 (Rated voltage): 50V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range): $-40^{\circ}C \sim +110^{\circ}C$

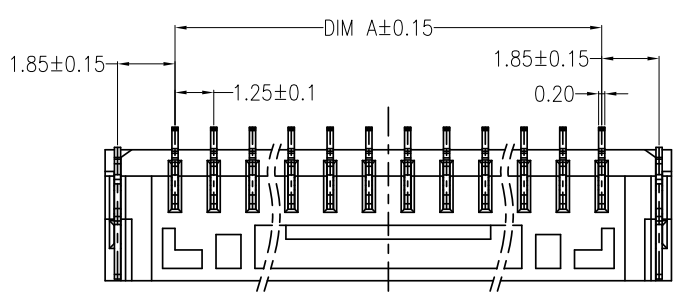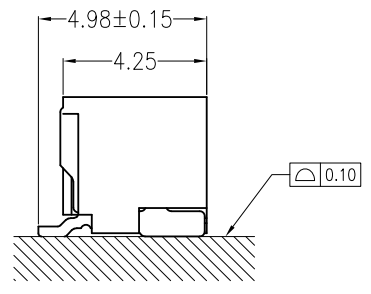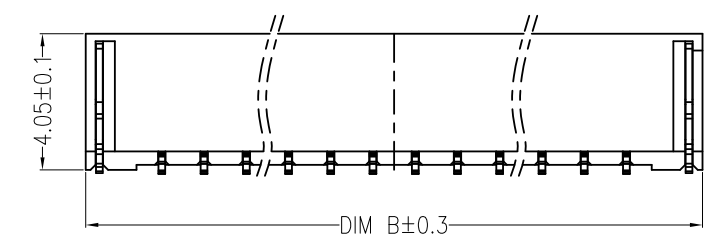

孔位 尺寸	DIM A	DIM B	DIM C	DIM E
2P	1.25	5.75	3.75	0.75
3P	2.50	7.00	5.00	1.60
4P	3.75	8.25	6.25	2.65
5P	5.00	9.50	7.50	2.50
6P	6.25	10.75	8.75	4.65
7P	7.50	12.00	10.00	4.65
8P	8.75	13.25	11.25	4.65
9P	10.00	14.50	12.50	4.65
10P	11.25	15.75	13.75	5.70
11P	12.50	17.00	15.00	6.60
12P	13.75	18.25	16.25	6.60
13P	15.00	19.50	17.50	6.60
14P	16.25	20.75	18.75	6.60
15P	17.50	22.00	20.00	6.60

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
D	CAP	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE Sn-plated
B	CONTACT	02~15PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

HDGC 深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
电话: 0755-27129737 传真: 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表		TITLE: 产品名称: GH1.25针座	
X.X	± 0.30	X.X°	$\pm 3^{\circ}$
X.XX	± 0.30	X.XX°	$\pm 2^{\circ}$
X.XXX	± 0.10	X.XXX°	$\pm 1^{\circ}$
APPD: 核准: 谢亮		PART NO: 产品编号: HDGC1257WV-S-XP	
CHECK: 校对: 王建业		DATE	SCALE
DRAW: 绘图: 黄艳兰		UNIT	CODE NUMBER
		2018-12-30	1:1
		mm	A018