


REV. 0
DCO 143671

| | |
|-----------------|-----------------------------|
| COIL: @ 25°C | |
| RESISTANCE | 1560 OHMS ± 10% |
| NOMINAL VOLTAGE | 26.5 VDC |
| MUST OPERATE | 14.2 VDC |
| MUST RELEASE | 8.0 VDC MAX., 1.37 VDC MIN. |

| | |
|-----------------------------------|---------------------------|
| ENVIRONMENT: | |
| VIBRATION | 10 Hz TO 3000 Hz @ 30 g's |
| SHOCK | 75 g's 6 MS. DURATION |
| TEMPERATURE | -65 °C TO +125 °C |
| NOTES: OPERATE TIME 2.0 MS MAX. | |
| RELEASE TIME 1.5 MS MAX. | |
| CONTACT STABILIZATION 2.0 MS MAX. | |

CUSTOMER DATA SHEET

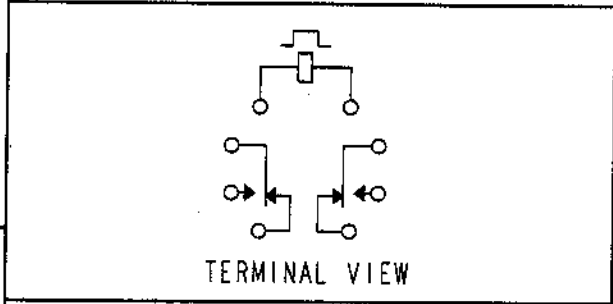

| | |
|-----------------|-------------------------------------|
| CONTACT RATING: | LOW LEVEL TO 1A |
| | 28 VDC RESISTIVE 100,000 OPERATIONS |

DR. B.D. 14OCT02 CK *David C. 1/14/02*



CUST. QPL
CUST. NO. M39016/9-024M REV.

"JMA" RELAY

JMAP-26XM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[JMAP-26XM](#)