
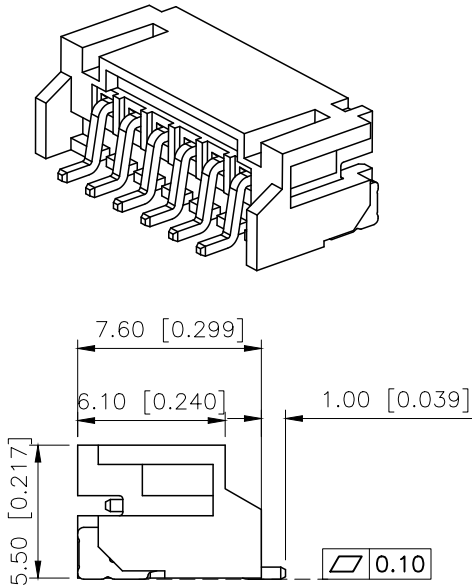


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.10	阿树

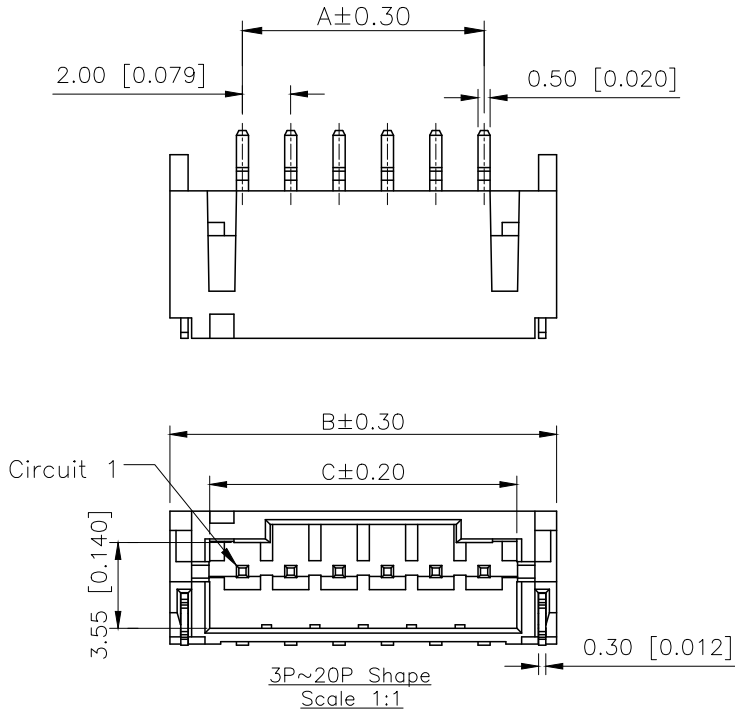

■SPECIFICATIONS



- Voltage rating:100V AC/DC
- Current rating:2A AC/DC
- Withstanding Voltage:800V AC/minute
- Temperature range:−40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤10mΩ
- After environmental testing:≤20mΩ

PART NO.:

X2016 W R S-XX-9T SW
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Straight 90°
④Welding Way:S-SMT
⑤Row No.Pin No:XX-02~20Pin
⑥Material: LP-LCP;9T-PA9T 94V-0
⑦Planting:SW-Matte Tin Plating

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	8.00	4.70	12	22.00	28.00	24.70
03	4.00	10.00	6.70	13	24.00	30.00	26.70
04	6.00	12.00	8.70	14	26.00	32.00	28.70
05	8.00	14.00	10.70	15	28.00	34.00	30.70
06	10.00	16.00	12.70	16	30.00	36.00	32.70
07	12.00	18.00	14.70	17	32.00	38.00	34.70
08	14.00	20.00	16.70	18	34.00	40.00	36.70
09	16.00	22.00	18.70	19	36.00	42.00	38.70
10	18.00	24.00	20.70	20	38.00	44.00	40.70
11	20.00	26.00	22.70				

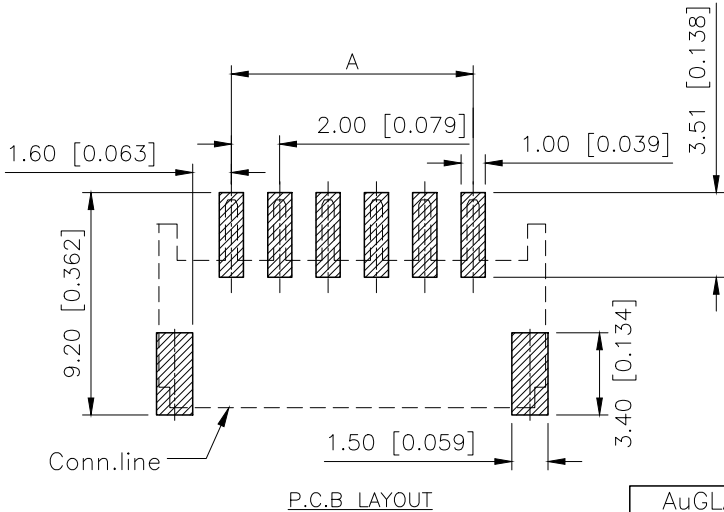

X2016WRS-XX-LPSWHF	LCP UL 94V-0	Brass	Tin-Plated	X2016H
X2016WRS-XX-LPSW			Gold-Flash	
X2016WRS-XX-9TV01	PA9T UL 94V-0		Tin-Plated	
X2016WRS-XX-9TSW				
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.00mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X2016WRS-XX-9TSW
APPROVED		SIZE:	A4	DWG NO.:	

SCALE	PAGE	REVISION
N/A	1/1	A1