

NTC ICL

Inrush current limiter radial lead NTC thermistor



Product features

- Epoxy sealed radial lead NTC thermistor
- High rated power, low power consumption
- 5 to 30 millimeter disk type
- Resistance range 0.5 Ω to 120 Ω
- Non-linear change in resistance vs temperature


Applications

- Switched mode power supplies
- Power conversion
- Uninterruptible power supplies
- Inverter systems
- Vac and Vdc motors
- Lighting drivers
- Toroidal transformer circuits
- Supercapacitor or other capacitor pre-charging circuits
- High power industrial equipment (welders, cutting and other robotics)

Environmental compliance and general specifications




Table 1. Part numbering

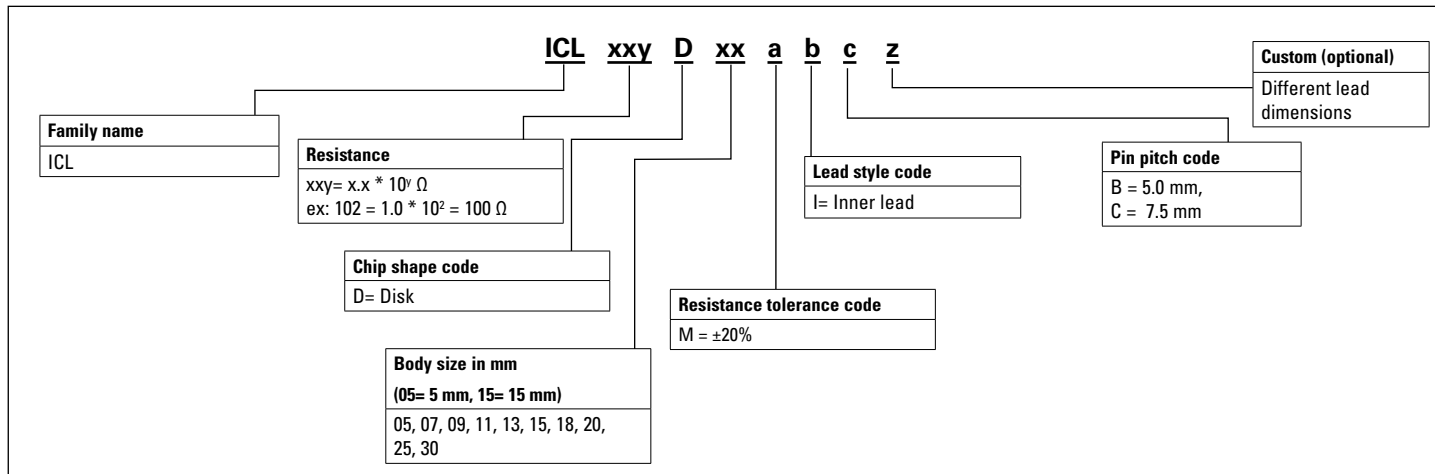

See electrical specification table for option details

Mechanical parameters- mm

I (Inner lead)

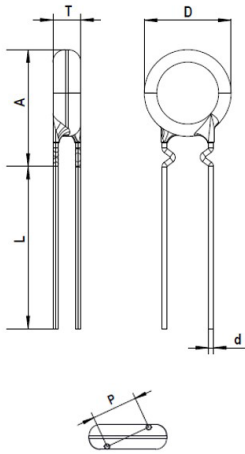


| Disk size | D maximum | T maximum | P | d | A maximum | L |
|-----------|-----------|-----------|----------|-----------|-----------|----------|
| D05 | 7 | 5 | 5 ±0.5 | 0.6 ±0.02 | 12.5 | 3.5 ±0.5 |
| D07 | 8.5 | 5 | 5 ±0.5 | 0.6 ±0.02 | 14.5 | 3.5 ±0.5 |
| D09 | 9.5 | 5 | 5 ±0.5 | 0.8 ±0.02 | 15.5 | 3.5 ±0.5 |
| D11 | 12 | 6 | 5 ±0.5 | 0.8 ±0.02 | 18 | 3.5 ±0.5 |
| D13 | 13 | 6 | 7.5 ±0.8 | 0.8 ±0.02 | 19 | 3.5 ±0.5 |
| D15 | 16 | 6 | 7.5 ±0.8 | 0.8 ±0.02 | 22 | 3.5 ±0.5 |
| D18 | 19 | 7 | 7.5 ±0.8 | 1.0 ±0.02 | 25 | 3.5 ±0.5 |
| D20 | 23 | 7 | 7.5 ±0.8 | 1.0 ±0.02 | 29 | 3.5 ±0.5 |
| D25 | 28 | 8 | 7.5 ±0.8 | 1.0 ±0.02 | 34 | 3.5 ±0.5 |
| D30 | 34 | 8 | 7.5 ±0.8 | 1.0 ±0.02 | 40 | 3.5 ±0.5 |

D05 (5 mm) to D11 (11 mm) Leads: tin plated copper clad steel covered CCS leads

D13 (13 mm) to D30 (30 mm) Leads: tin plated copper

Part marking



| Number | Item | Code | Specification |
|--------|--------------------------------|------------|---------------|
| | | 2R5 | 2.5 Ω |
| 1 | Zero Power Resistance at 25 °C | 10 | 10 Ω |
| | | 100 | 100 Ω |
| 2 | | Chip shape | D |
| 3 | Size | 9 | 9 mm |

Packaging information

| Part number | BULK (pcs/bag) |
|--------------|----------------|
| ICLxxxD05xxx | 1000 |
| ICLxxxD07xxx | 1000 |
| ICLxxxD09xxx | 500 |
| ICLxxxD11xxx | 500 |
| ICLxxxD13xxx | 500 |
| ICLxxxD15xxx | 250 |
| ICLxxxD18xxx | 100 |
| ICLxxxD20xxx | 100 |
| ICLxxxD25xxx | 50 |
| ICLxxxD30xxx | 50 |

Electrical specifications

| Part number | Zero power resistance @ +25°C R ₂₅ (Ω) | Resistance tolerance (Part number code) | Lead style (Part number code) | Pin pitch (Part number code) | I _{max} (A) | Beta value (25/50) (K) | CT, maximum permissible capacitance at 240 Vac (μF) | Dissipation factor (mW/°C) | Thermal time constant T (second) | Operation temperature TL-TU(°C) |
|--------------|--|---|-------------------------------|------------------------------|----------------------|------------------------|---|----------------------------|----------------------------------|---------------------------------|
| ICL300D05abc | 3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 2500 | 70 | 7 ±3 | 20 ±6 | -40 to +150 |
| ICL400D05abc | 4 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 2500 | 70 | 7 ±3 | 20 ±6 | -40 to +150 |
| ICL500D05abc | 5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 2550 | 70 | 7 ±3 | 20 ±6 | -40 to +150 |
| ICL800D05abc | 8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1 | 2600 | 70 | 7 ±3 | 20 ±6 | -40 to +150 |
| ICL101D05abc | 10 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1 | 2650 | 70 | 7 ±3 | 20 ±6 | -40 to +150 |
| ICL121D05abc | 12 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1 | 2650 | 70 | 7 ±3 | 20 ±6 | -40 to +150 |
| ICL161D05abc | 16 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1 | 2700 | 70 | 7 ±3 | 20 ±6 | -40 to +150 |
| ICL201D05abc | 20 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1 | 2700 | 70 | 7 ±3 | 20 ±6 | -40 to +150 |
| ICL300D07abc | 3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2550 | 120 | 8 ±3 | 30 ±9 | -40 to +170 |
| ICL400D07abc | 4 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2600 | 120 | 8 ±3 | 30 ±9 | -40 to +170 |
| ICL500D07abc | 5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2600 | 120 | 8 ±3 | 30 ±9 | -40 to +170 |
| ICL600D07abc | 6 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2650 | 120 | 8 ±3 | 30 ±9 | -40 to +170 |
| ICL700D07abc | 7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2650 | 120 | 8 ±3 | 30 ±9 | -40 to +170 |
| ICL800D07abc | 8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 2700 | 120 | 8 ±3 | 30 ±9 | -40 to +170 |
| ICL101D07abc | 10 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 2700 | 120 | 8 ±3 | 30 ±9 | -40 to +170 |
| ICL151D07abc | 15 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 2750 | 120 | 8 ±3 | 30 ±9 | -40 to +170 |
| ICL201D07abc | 20 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1.5 | 2800 | 120 | 8 ±3 | 30 ±9 | -40 to +170 |
| ICL301D07abc | 30 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1 | 2850 | 120 | 8 ±3 | 30 ±9 | -40 to +170 |

a= Enter resistance tolerance code from table above (M = ±20%)

b= Enter lead style code from table above (I= Inner lead)

c= Enter pin pitch code from table above (B = 5.0 mm, C = 7.5 mm)

Electrical specifications, cont.

| Part number | Zero power resistance @ +25°C R ₂₅ (Ω) | Resistance tolerance (Part number code) | Lead style (Part number code) | Pin pitch (Part number code) | I _{max} (A) | Beta value (25/50) (K) | CT, maximum permissible capacitance at 240 Vac (μF) | Dissipation factor (mW/°C) | Thermal time constant T (second) | Operation temperature TL~TU(°C) |
|--------------|---|---|-------------------------------|------------------------------|----------------------|------------------------|---|----------------------------|----------------------------------|---------------------------------|
| ICL250D09abc | 2.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4 | 2550 | 180 | 9 ±3 | 40 ±12 | -40 to +170 |
| ICL300D09abc | 3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4 | 2600 | 180 | 9 ±3 | 40 ±12 | -40 to +170 |
| ICL500D09abc | 5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3.5 | 2650 | 180 | 9 ±3 | 40 ±12 | -40 to +170 |
| ICL600D09abc | 6 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3.5 | 2700 | 180 | 9 ±3 | 40 ±12 | -40 to +170 |
| ICL700D09abc | 7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2700 | 180 | 9 ±3 | 40 ±12 | -40 to +170 |
| ICL800D09abc | 8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2.5 | 2700 | 180 | 9 ±3 | 40 ±12 | -40 to +170 |
| ICL101D09abc | 10 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2.5 | 2750 | 180 | 9 ±3 | 40 ±12 | -40 to +170 |
| ICL151D09abc | 15 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2.5 | 2800 | 180 | 9 ±3 | 40 ±12 | -40 to +170 |
| ICL201D09abc | 20 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 2850 | 180 | 9 ±3 | 40 ±12 | -40 to +170 |
| ICL301D09abc | 30 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1.5 | 2950 | 180 | 9 ±3 | 40 ±12 | -40 to +170 |
| ICL601D09abc | 60 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1 | 3150 | 180 | 9 ±3 | 40 ±12 | -40 to +170 |
| ICL070D11abc | 0.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6 | 2500 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL100D11abc | 1 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6 | 2500 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL130D11abc | 1.3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6 | 2550 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL150D11abc | 1.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6 | 2550 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL250D11abc | 2.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5.5 | 2600 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL300D11abc | 3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5.5 | 2650 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL400D11abc | 4 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4.5 | 2700 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL500D11abc | 5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4.5 | 2700 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL680D11abc | 6.8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3.5 | 2750 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |

a= Enter resistance tolerance code from table above (M = ±20%)

b= Enter lead style code from table above (I= Inner lead)

c= Enter pin pitch code from table above (B = 5.0 mm, C = 7.5 mm)

Electrical specifications, cont.

| Part number | Zero power resistance @ +25°C R ₂₅ (Ω) | Resistance tolerance (Part number code) | Lead style (Part number code) | Pin pitch (Part number code) | I _{max} (A) | Beta value (25/50) (K) | CT, maximum permissible capacitance at 240 Vac (μF) | Dissipation factor (mW/°C) | Thermal time constant T (second) | Operation temperature TL-TU(°C) |
|--------------|--|---|-------------------------------|------------------------------|----------------------|------------------------|---|----------------------------|----------------------------------|---------------------------------|
| ICL800D11abc | 8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3.5 | 2800 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL101D11abc | 10 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2800 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL121D11abc | 12 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2850 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL131D11abc | 13 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2850 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL151D11abc | 15 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2.5 | 2850 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL161D11abc | 16 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2.5 | 2900 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL201D11abc | 20 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2.5 | 2950 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL221D11abc | 22 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2.5 | 2950 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL251D11abc | 25 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 3000 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL301D11abc | 30 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 3100 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL471D11abc | 47 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 3150 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL501D11abc | 50 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 3200 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL801D11abc | 80 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1.5 | 3300 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL102D11abc | 100 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1 | 3300 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL122D11abc | 120 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1 | 3400 | 300 | 11 ±4 | 60 ±18 | -40 to +170 |
| ICL070D13abc | 0.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7 | 2500 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL100D13abc | 1 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7 | 2550 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL130D13abc | 1.3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7 | 2550 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL150D13abc | 1.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7 | 2550 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL250D13abc | 2.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6 | 2650 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |

a= Enter resistance tolerance code from table above (M = ±20%)

b= Enter lead style code from table above (I= Inner lead)

c= Enter pin pitch code from table above (B = 5.0 mm, C = 7.5 mm)

Electrical specifications, cont.

| Part number | Zero power resistance @ +25°C R ₂₅ (Ω) | Resistance tolerance (Part number code) | Lead style (Part number code) | Pin pitch (Part number code) | I _{max} (A) | Beta value (25/50) (K) | CT, maximum permissible capacitance at 240 Vac (μF) | Dissipation factor (mW/°C) | Thermal time constant T (second) | Operation temperature TL-TU(°C) |
|--------------|--|---|-------------------------------|------------------------------|----------------------|------------------------|---|----------------------------|----------------------------------|---------------------------------|
| ICL400D13abc | 4 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5 | 2700 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL470D13abc | 4.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4.5 | 2700 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL500D13abc | 5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5 | 2750 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL700D13abc | 7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4 | 2800 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL800D13abc | 8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4 | 2800 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL101D13abc | 10 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4 | 2850 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL121D13abc | 12 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4 | 2850 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL151D13abc | 15 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2900 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL161D13abc | 16 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2900 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL181D13abc | 18 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 2950 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL201D13abc | 20 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 3000 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL301D13abc | 30 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2.5 | 3100 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL501D13abc | 50 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 3200 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL801D13abc | 80 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1.5 | 3300 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL102D13abc | 100 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1.5 | 3400 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL122D13abc | 120 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1.5 | 3400 | 350 | 12 ±4 | 70 ±21 | -40 to +200 |
| ICL070D15abc | 0.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 8 | 2550 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL100D15abc | 1 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 9 | 2600 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL130D15abc | 1.3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 9 | 2650 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL150D15abc | 1.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 9 | 2650 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |

a= Enter resistance tolerance code from table above (M = ±20%)

b= Enter lead style code from table above (I= Inner lead)

c= Enter pin pitch code from table above (B = 5.0 mm, C = 7.5 mm)

Electrical specifications, cont.

| Part number | Zero power resistance @ +25°C R ₂₅ (Ω) | Resistance tolerance (Part number code) | Lead style (Part number code) | Pin pitch (Part number code) | I _{max} (A) | Beta value (25/50) (K) | CT, maximum permissible capacitance at 240 Vac (μF) | Dissipation factor (mW/°C) | Thermal time constant T (second) | Operation temperature TL-TU(°C) |
|--------------|---|---|-------------------------------|------------------------------|----------------------|------------------------|---|----------------------------|----------------------------------|---------------------------------|
| ICL200D15abc | 2 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 8 | 2700 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL250D15abc | 2.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7.5 | 2700 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL300D15abc | 3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7 | 2750 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL400D15abc | 4 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6.5 | 2800 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL500D15abc | 5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6 | 2800 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL600D15abc | 6 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5.5 | 2850 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL700D15abc | 7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5 | 2850 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL800D15abc | 8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5 | 2900 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL101D15abc | 10 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5 | 2950 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL121D15abc | 12 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5 | 3000 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL151D15abc | 15 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4 | 3100 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL161D15abc | 16 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4 | 3100 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL201D15abc | 20 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4 | 3150 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL251D15abc | 25 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3.5 | 3200 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL301D15abc | 30 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 3200 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL331D15abc | 33 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 3200 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL471D15abc | 47 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 3 | 3300 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL501D15abc | 50 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2.5 | 3400 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL601D15abc | 60 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2.5 | 3400 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL801D15abc | 80 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2.5 | 3450 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |

a= Enter resistance tolerance code from table above (M = ±20%)

b= Enter lead style code from table above (I= Inner lead)

c= Enter pin pitch code from table above (B = 5.0 mm, C = 7.5 mm)

Electrical specifications, cont.

| Part number | Zero power resistance @ +25°C R ₂₅ (Ω) | Resistance tolerance (Part number code) | Lead style (Part number code) | Pin pitch (Part number code) | I _{max} (A) | Beta value (25/50) (K) | CT, maximum permissible capacitance at 240 Vac (μF) | Dissipation factor (mW/°C) | Thermal time constant T (second) | Operation temperature TL-TU(°C) |
|--------------|--|---|-------------------------------|------------------------------|----------------------|------------------------|---|----------------------------|----------------------------------|---------------------------------|
| ICL102D15abc | 100 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 2 | 3450 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL122D15abc | 120 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 1.5 | 3500 | 500 | 17 ±5 | 80 ±24 | -40 to +200 |
| ICL070D18abc | 0.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 15 | 2600 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL100D18abc | 1 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 14 | 2650 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL150D18abc | 1.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 12 | 2700 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL200D18abc | 2 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 11 | 2750 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL250D18abc | 2.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 10 | 2800 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL300D18abc | 3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 9 | 2800 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL400D18abc | 4 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 8.5 | 2850 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL470D18abc | 4.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 8 | 2850 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL500D18abc | 5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7.5 | 2850 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL600D18abc | 6 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7 | 2900 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL680D18abc | 7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7 | 2950 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL700D18abc | 7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6.5 | 2950 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL800D18abc | 8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6.5 | 3000 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL101D18abc | 10 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6 | 3100 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL121D18abc | 12 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5.5 | 3100 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL131D18abc | 13 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5.5 | 3150 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL151D18abc | 15 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5 | 3150 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL161D18abc | 16 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5 | 3200 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |

a= Enter resistance tolerance code from table above (M = ±20%)

b= Enter lead style code from table above (I= Inner lead)

c= Enter pin pitch code from table above (B = 5.0 mm, C = 7.5 mm)

Electrical specifications, cont.

| Part number | Zero power resistance @ +25°C R ₂₅ (Ω) | Resistance tolerance (Part number code) | Lead style (Part number code) | Pin pitch (Part number code) 5.0 mm (B) 7.5 mm (C) | I _{max} (A) | Beta value (25/50) (K) | CT, maximum permissible capacitance at 240 Vac (μF) | Dissipation factor (mW/°C) | Thermal time constant T (second) | Operation temperature TL-TU(°C) |
|--------------|--|---|-------------------------------|--|----------------------|------------------------|---|----------------------------|----------------------------------|---------------------------------|
| ICL181D18abc | 18 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5 | 3200 | 800 | 25 ±8 | 90 ±27 | -40 to +200 |
| ICL201D18abc | 20 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4.5 | 3200 | 800 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL301D18abc | 30 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4 | 3300 | 800 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL070D20abc | 0.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 18 | 2650 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL100D20abc | 1 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 16 | 2700 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL150D20abc | 1.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 14 | 2750 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL200D20abc | 2 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 12.5 | 2800 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL250D20abc | 2.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 11.5 | 2850 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL300D20abc | 3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 10.5 | 2850 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL400D20abc | 4 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 9.5 | 2900 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL470D20abc | 4.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 9 | 2950 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL500D20abc | 5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 9 | 3000 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL600D20abc | 6 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 8.5 | 3050 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL680D20abc | 7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 8 | 3100 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL700D20abc | 7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 8 | 3100 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL800D20abc | 8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7.5 | 3100 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL101D20abc | 10 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7 | 3150 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL121D20abc | 12 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6.5 | 3200 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL131D20abc | 13 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6.5 | 3200 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL151D20abc | 15 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6 | 3200 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |

a= Enter resistance tolerance code from table above (M = ±20%)

b= Enter lead style code from table above (I= Inner lead)

c= Enter pin pitch code from table above (B = 5.0 mm, C = 7.5 mm)

Electrical specifications, cont.

| Part number | Zero power resistance @ +25°C R ₂₅ (Ω) | Resistance tolerance (Part number code) | Lead style (Part number code) | Pin pitch (Part number code) | I _{max} (A) | Beta value (25/50) (K) | CT, maximum permissible capacitance at 240 Vac (μF) | Dissipation factor (mW/°C) | Thermal time constant T (second) | Operation temperature TL-TU(°C) |
|--------------|--|---|-------------------------------|------------------------------|----------------------|------------------------|---|----------------------------|----------------------------------|---------------------------------|
| ICL161D20abc | 16 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5.5 | 3200 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL181D20abc | 18 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5.5 | 3300 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL201D20abc | 20 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5.5 | 3300 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL301D20abc | 30 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4 | 3400 | 1200 | 30 ±9 | 100 ±30 | -40 to +200 |
| ICL050D25abc | 0.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 20 | 2650 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL070D25abc | 0.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 20 | 2700 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL100D25abc | 1 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 20 | 2750 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL150D25abc | 1.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 17 | 2800 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL200D25abc | 2 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 15 | 2850 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL250D25abc | 2.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 14 | 2900 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL300D25abc | 3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 13 | 2950 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL400D25abc | 4 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 12 | 3050 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL470D25abc | 4.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 11.5 | 3100 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL500D25abc | 5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 11 | 3100 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL680D25abc | 6.8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 10 | 3150 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL700D25abc | 7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 10 | 3150 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL800D25abc | 8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 9.5 | 3200 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL101D25abc | 10 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 8.5 | 3200 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL121D25abc | 12 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 8 | 3300 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL151D25abc | 15 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7.5 | 3300 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |

a= Enter resistance tolerance code from table above (M = ±20%)
b= Enter lead style code from table above (I= Inner lead)
c= Enter pin pitch code from table above (B = 5.0 mm, C = 7.5 mm)

Electrical specifications, cont.

| Part number | Zero power resistance @ +25°C R ₂₅ (Ω) | Resistance tolerance (Part number code) | Lead style (Part number code) | Pin pitch (Part number code) | I _{max} (A) | Beta value (25/50) (K) | CT, maximum permissible capacitance at 240 Vac (μF) | Dissipation factor (mW/°C) | Thermal time constant T (second) | Operation temperature TL-TU(°C) |
|--------------|---|---|-------------------------------|------------------------------|----------------------|------------------------|---|----------------------------|----------------------------------|---------------------------------|
| ICL181D25abc | 18 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6.5 | 3400 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL201D25abc | 20 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 6 | 3400 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL301D25abc | 30 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 4.5 | 3450 | 2500 | 40 ±12 | 125 ±38 | -40 to +200 |
| ICL050D30abc | 0.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 30 | 2700 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL070D30abc | 0.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 30 | 2750 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL100D30abc | 1 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 30 | 2800 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL150D30abc | 1.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 25 | 2850 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL200D30abc | 2 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 23 | 2950 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL250D30abc | 2.5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 18 | 3000 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL300D30abc | 3 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 17 | 3100 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL400D30abc | 4 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 16 | 3150 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL470D30abc | 4.7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 15 | 3150 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL500D30abc | 5 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 14 | 3200 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL680D30abc | 6.8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 12 | 3200 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL700D30abc | 7 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 12 | 3200 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL800D30abc | 8 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 11 | 3300 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL101D30abc | 10 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 10 | 3300 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL121D30abc | 12 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 9 | 3400 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |

a= Enter resistance tolerance code from table above (M = ±20%)

b= Enter lead style code from table above (I= Inner lead)


c= Enter pin pitch code from table above (B = 5.0 mm, C = 7.5 mm)

Electrical specifications, cont.

| Part number | Zero power resistance @ +25°C R_{25} (Ω) | Resistance tolerance (Part number code) | Lead style (Part number code) | Pin pitch (Part number code) | I_{max} (A) | Beta value (25/50) (K) | CT, maximum permissible capacitance at 240 Vac (μ F) | Dissipation factor (mW/°C) | Thermal time constant T (second) | Operation temperature T_L ~ T_U (°C) |
|--------------|--|---|-------------------------------|------------------------------|---------------|------------------------|---|----------------------------|----------------------------------|--|
| ICL151D30abc | 15 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 8 | 3450 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL181D30abc | 18 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 8 | 3450 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL201D30abc | 20 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 7 | 3450 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |
| ICL301D30abc | 30 | ±20% (M) | Inner lead (I) | 5.0 mm (B) 7.5 mm (C) | 5.5 | 3600 | 3500 | 50 ±12 | 170 ±51 | -40 to +200 |



a= Enter resistance tolerance code from table above (M = ±20%)
 b= Enter lead style code from table above (I= Inner lead)
 c= Enter pin pitch code from table above (B = 5.0 mm, C = 7.5 mm)

Derating curve

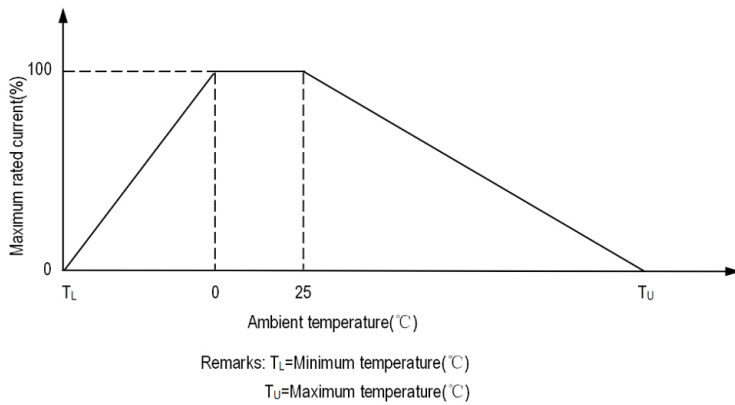



Temperature characteristics

R-T curve

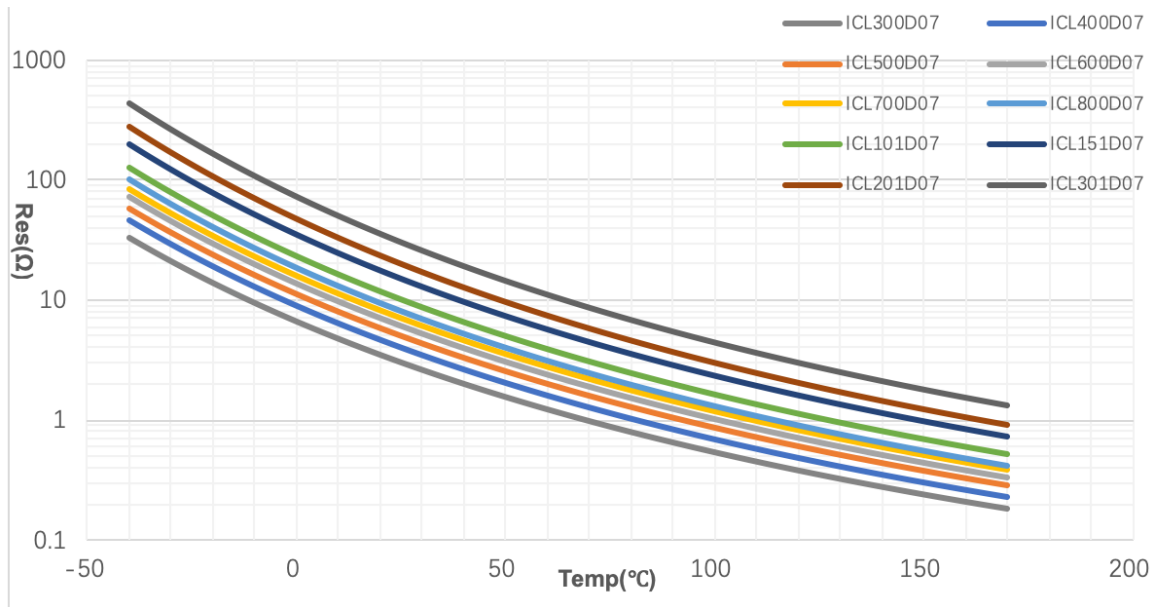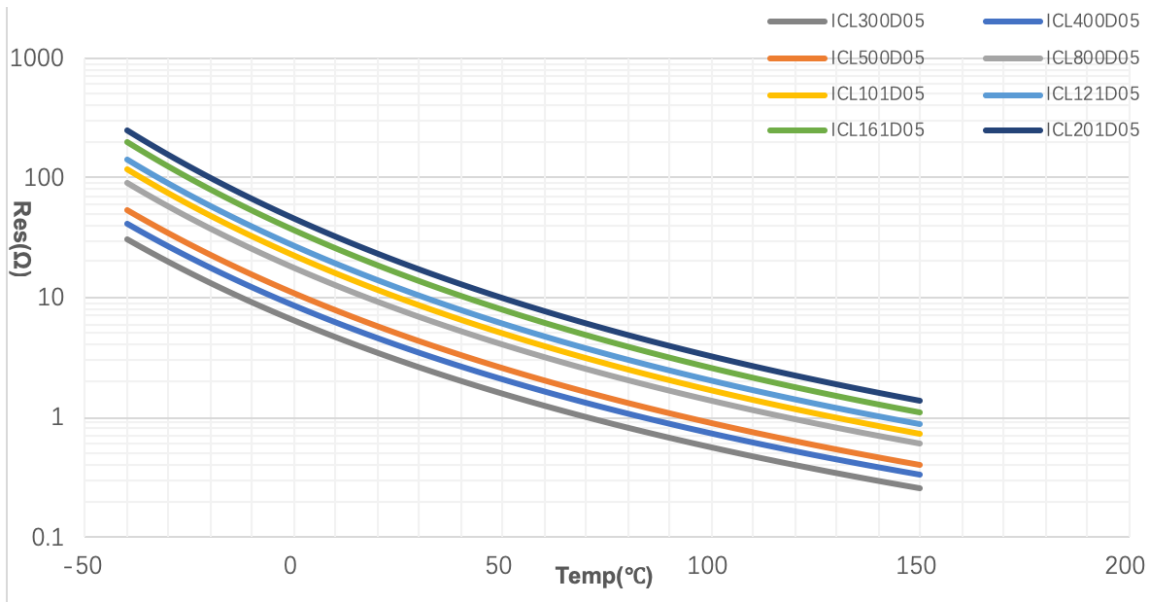



Temperature characteristics

R-T curve

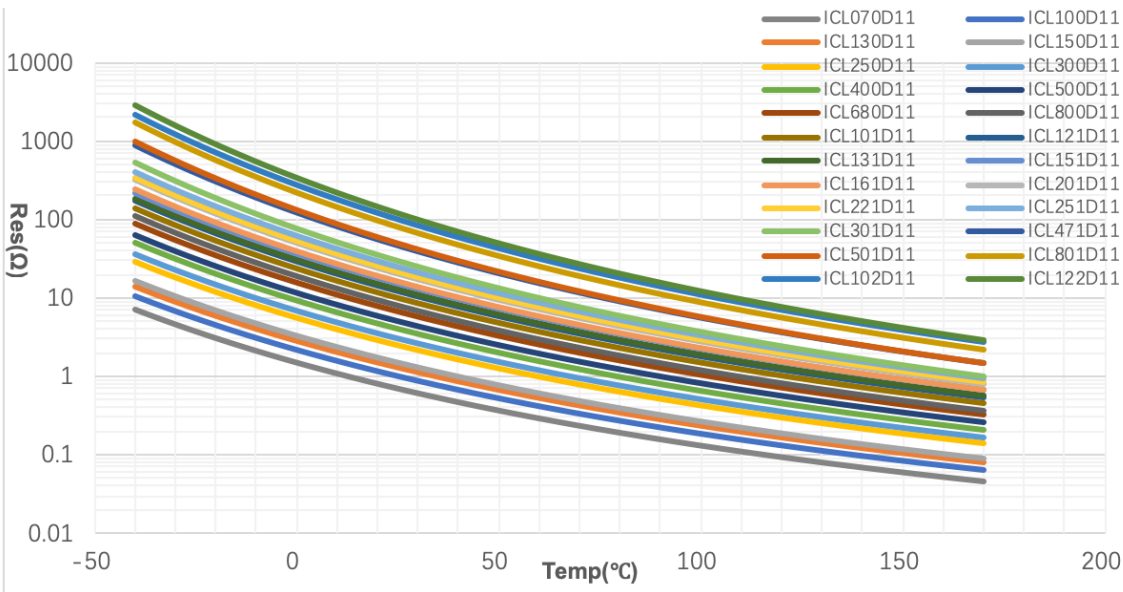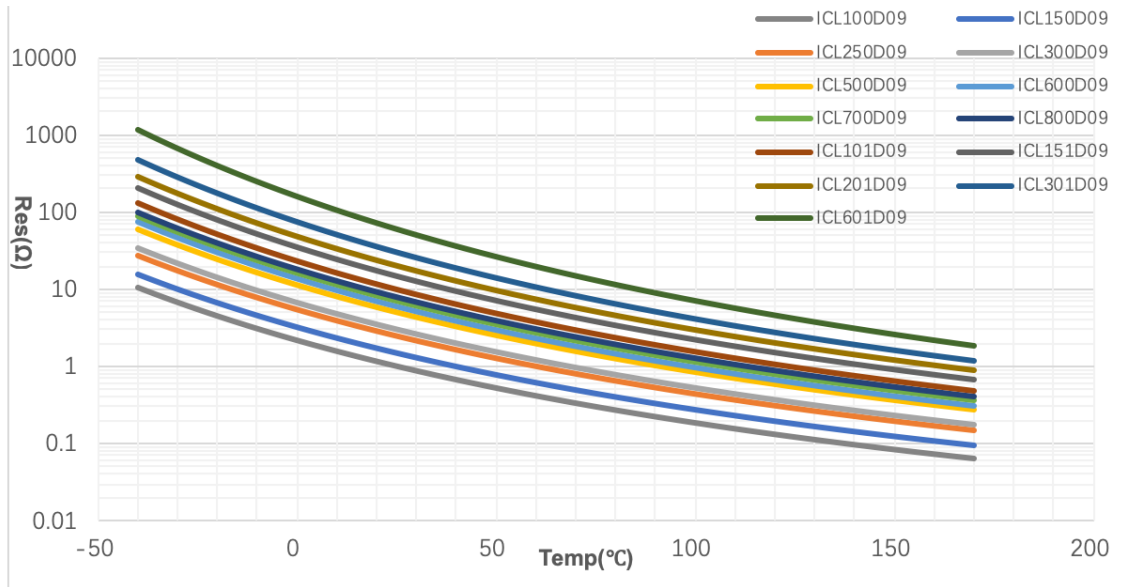



Temperature characteristics, cont.

R-T curve

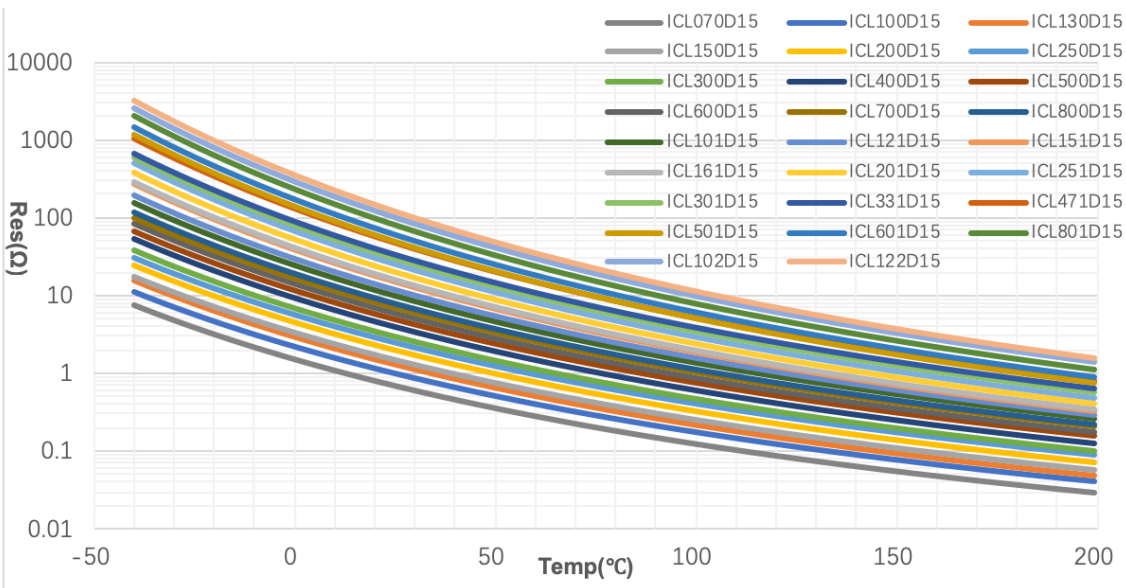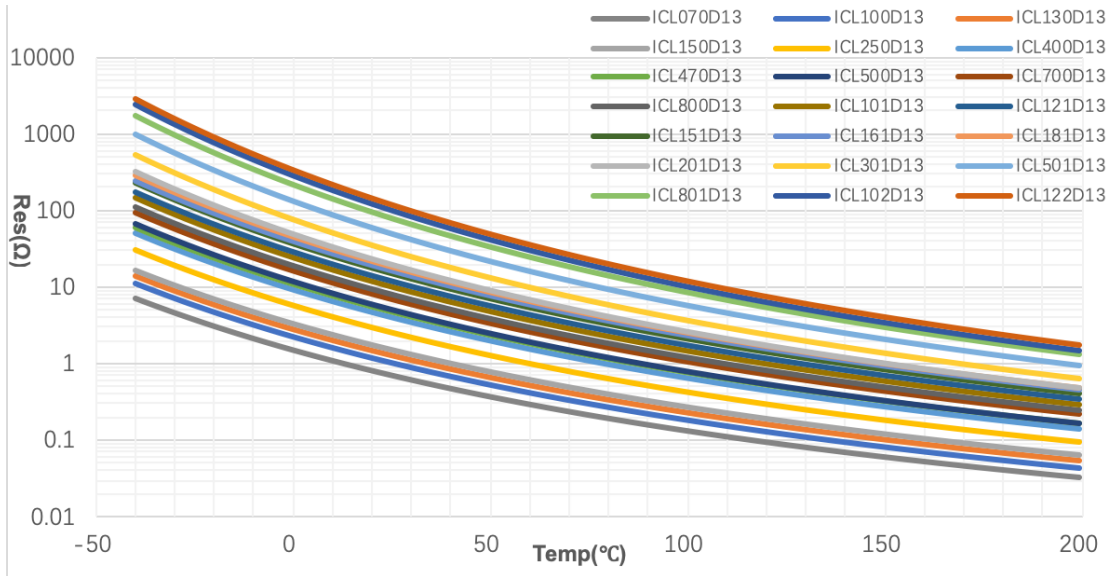



Temperature characteristics

R-T curve

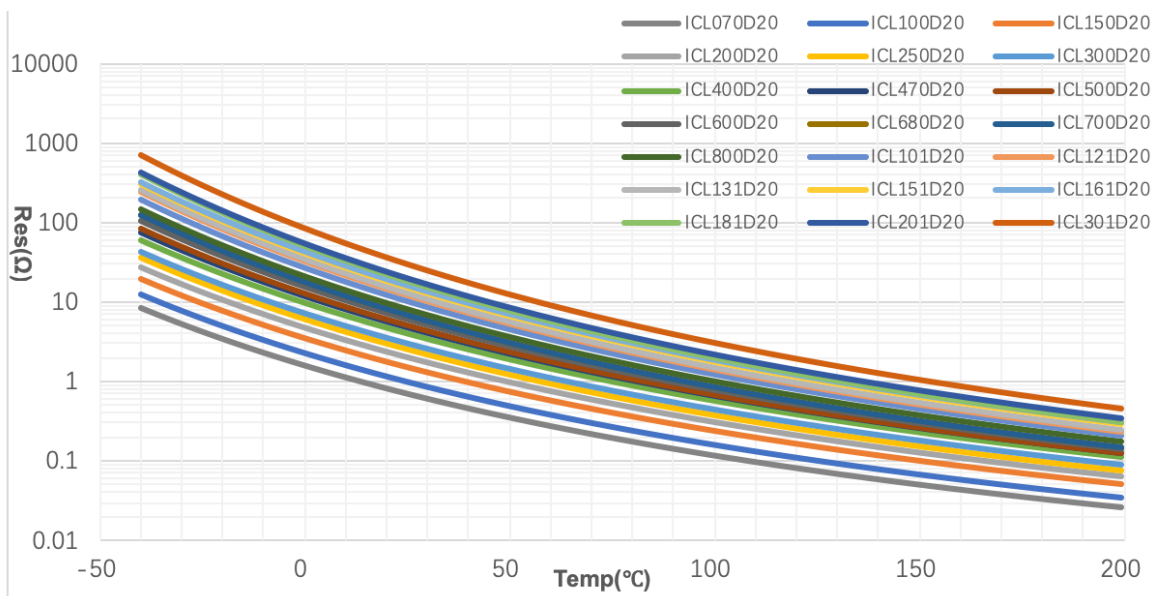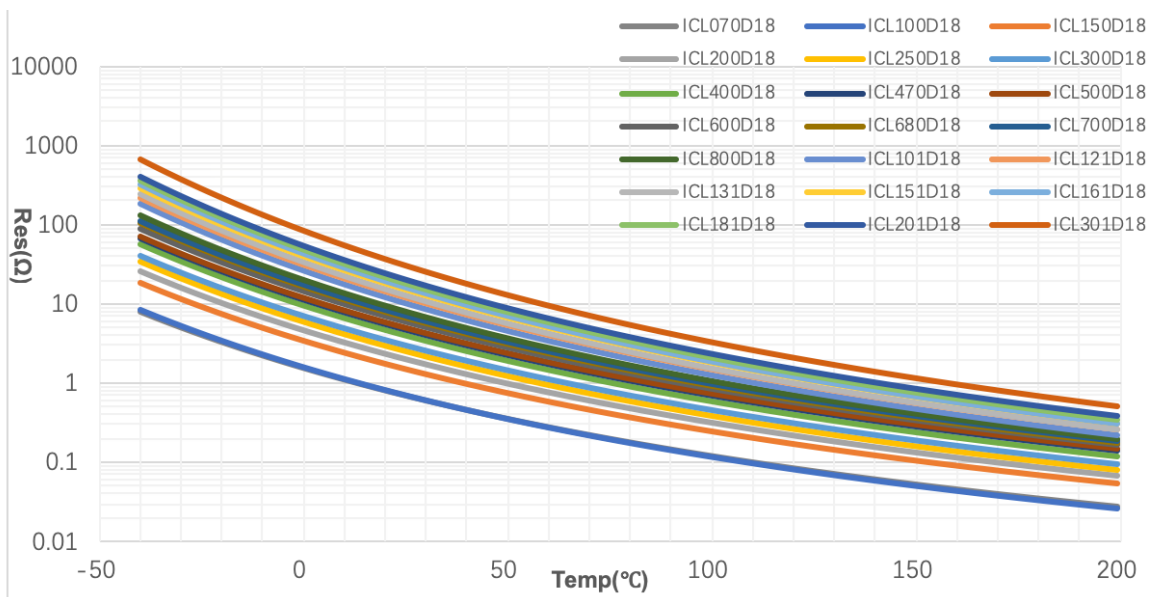


Temperature characteristics

R-T curve

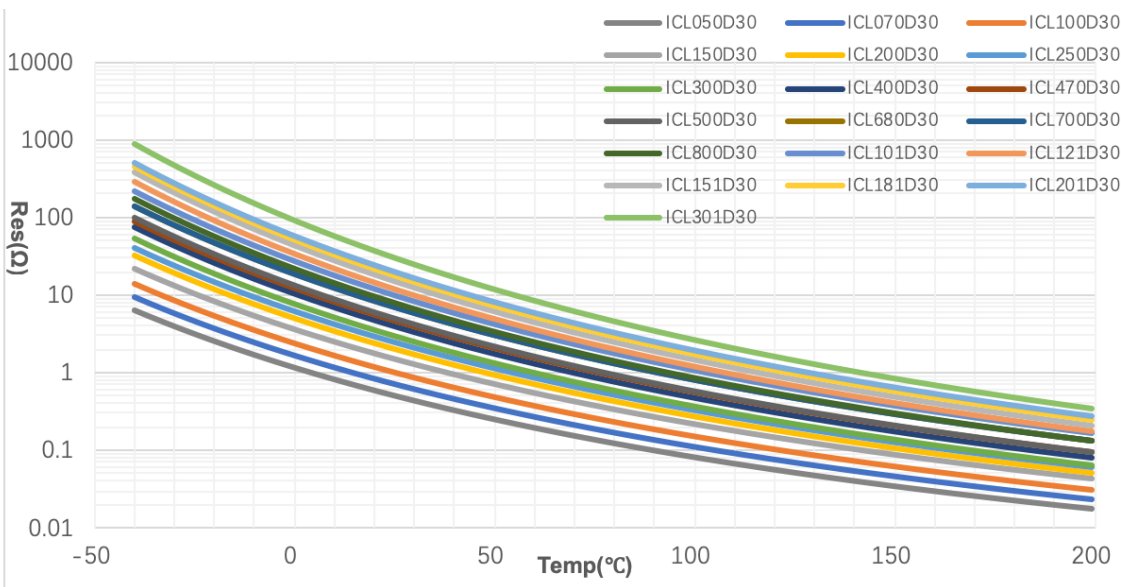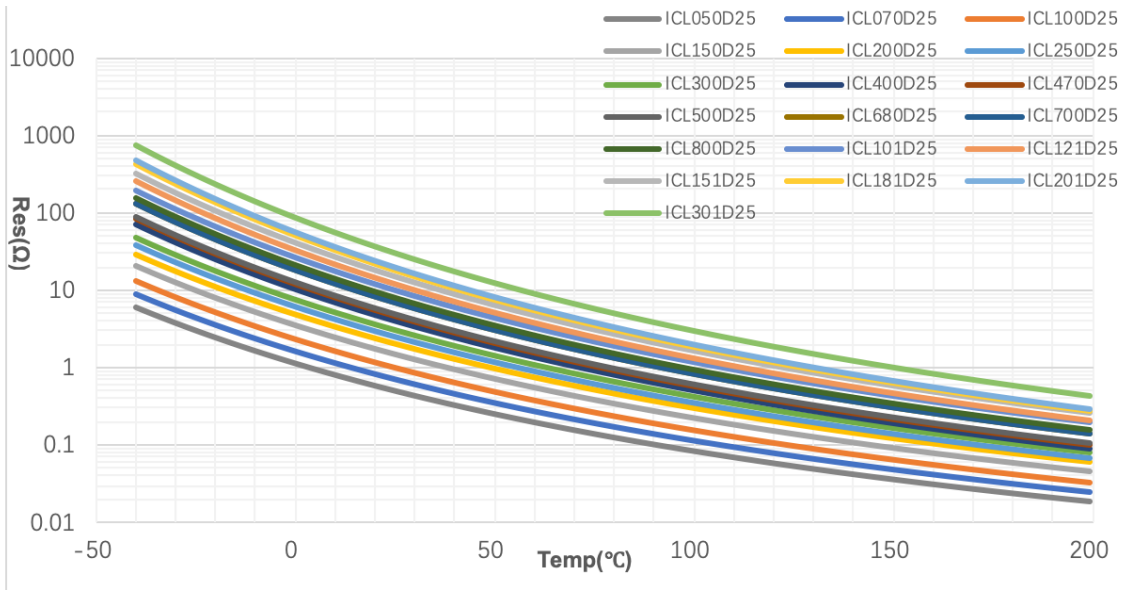

Wave solder profile

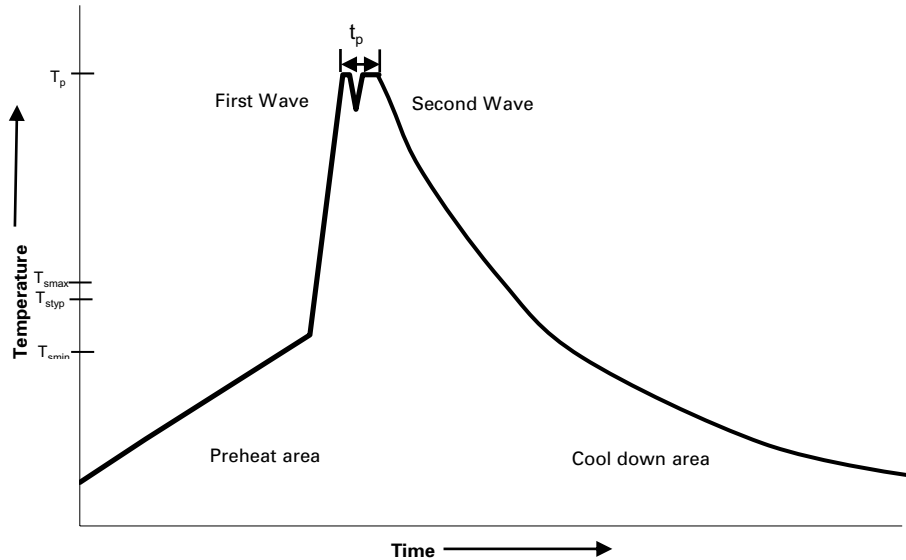

Reference EN 61760-1:2006

| Profile feature | Standard SnPb solder | Lead (Pb) free solder |
|---|---|---|
| Preheat | | |
| • Temperature min. (T_{smin}) | 100 °C | 100 °C |
| • Temperature typ. (T_{styp}) | 120 °C | 120 °C |
| • Temperature max. (T_{smax}) | 130 °C | 130 °C |
| • Time (T_{smin} to T_{smax}) (t_s) | 70 seconds | 70 seconds |
| Δ preheat to max Temperature | 150 °C max. | 150 °C max. |
| Peak temperature (T_p)* | 235 °C – 260 °C | 250 °C – 260 °C |
| Time at peak temperature (t_p) | 10 seconds max 5 seconds max each wave | 10 seconds max 5 seconds max each wave |
| Ramp-down rate | ~ 2 K/s min ~3.5 K/s typ ~5 K/s max | ~ 2 K/s min ~3.5 K/s typ ~5 K/s max |
| Time 25 °C to 25 °C | 4 minutes | 4 minutes |

Manual solder

+360 °C (3 seconds maximum by soldering iron distance between soldering position and coating 2 mm minimum), generally manual/hand soldering is not recommended.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2022 Eaton
All Rights Reserved
Printed in USA
Publication No. ELX1228 BU-ELX22088
July 2022

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

