# 8-1393480-5 ! PENDING OBSOLESCENCE

#### AMPLIMITE

TE Internal #: 8-1393480-5 TE Internal Description: V23529B1223C209=SUB D STIFTLEI D-Sub Plug Assembly: Eurostyle, Right Angle, Shell Size 1, 2.74mm View on TE.com >



Connectors > D-Shaped Connectors > D-Sub Connectors > PCB D-Sub Connectors >

D-Sub Plug Assembly: Eurostyle, Right Angle, Shell Size 1, 2.74mm



Connector & Housing Type: Plug

Connector System: Cable-to-Board

Number of Positions: 9

Centerline (Pitch): 2.74 mm [.108 in ]

Number of Rows: 2

All D-Sub Plug Assembly: Eurostyle, Right Angle, Shell Size 1, 2.74mm (0)

## Features

### Product Type Features

Shell Material Configuration

Ground Feature Type

Full Metal Shell

Grounding Indents, Grounding Straps

Ground Feature Type	Grounding indents, Grounding straps	
Connector & Housing Type	Plug	
Connector System	Cable-to-Board	
Connector Shell Size	1	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
Number of Positions	9	
Number of Rows	2	
PCB Mount Orientation	Right Angle	
Body Features		
Assembly Process Feature Material	Brass	
Shell Plating Material	Tin	
Primary Product Color	Black	
Connector Profile	Eurostyle	
Contact Features		

V23529B1223C209=SUB D STIFTLEI



Contact Options	Installed	
	30 µin	
Contact Mating Area Plating Material	Gold	
PCB Contact Termination Area Plating Material	Tin	
Contact Base Material	Phosphor Bronze	
Contact Shape & Form	Round	
Contact Current Rating (Max)	2.2 A	
Termination Features		
Termination Post & Tail Length	3.2 mm[.126 in]	
Termination Method to PCB	Through Hole - Solder	
Mechanical Attachment		
Assembly Process Feature Plating Material	Tin	
Mounting Hole Diameter	3.1 mm	
PCB Mount Alignment	With	
PCB Mount Retention	With	
PCB Mount Retention Type	Boardlock	
Mating Retention	With	
Mating Retention Type	Threaded Insert, 4-40 UNC	
Connector Mounting Type	Board Mount	
Housing Features		
Shell Material	Steel	
Housing Material	Thermoplastic PBTP	
Centerline (Pitch)	2.74 mm[.108 in]	
Dimensions		
PCB Thickness (Recommended)	1.57 mm[.062 in]	
Row-to-Row Spacing	2.84 mm[.112 in]	
Usage Conditions		
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Operation/Application		
Durability Rating	250 Cycles	
Circuit Application	Signal	
Industry Standards		

**C** For support call+1 800 522 6752



Compatible With Approved Standards Products	DIN 41652	
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Quantity	32	
Packaging Method	Tray	
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant with Exemptions	
EU ELV Directive 2000/53/EC	Compliant with Exemptions	
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Pb (4% in Component Part) Aticle Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.	
Halogen Content	Not Low Halogen - contains Br or Cl > 900	

#### ppm.

#### Solder Process Capability

### Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**

V23529B1223C209=SUB D STIFTLEI





# Customers Also Bought

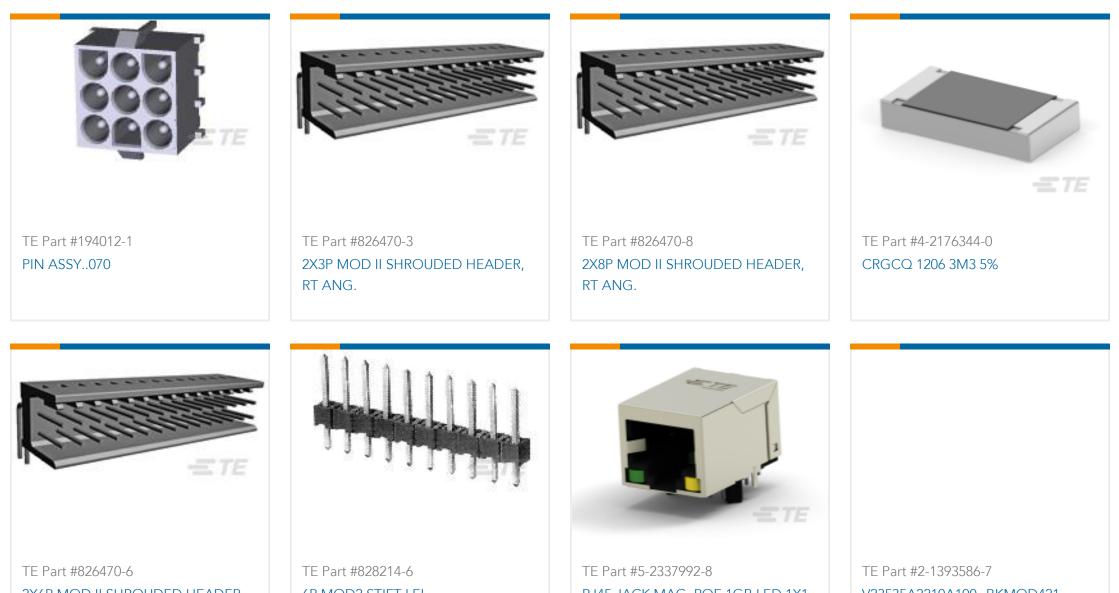

ZX6P MOD II SHROUDED HEADER,	6P MODZ STIFT LEI	RJ45 JACK MAG. POE IGB LED IXI	VZ3535AZZ1UA100=BKIVIOD4Z1
RT ANG.			HEADE



## Documents

**CAD** Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_8-1393480-5\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_8-1393480-5\_A.3d\_igs.zip

English

**C** For support call+1 800 522 6752



Customer View Model ENG\_CVM\_CVM\_8-1393480-5\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages AMPLIMITE Subminiature D Connectors - Right-Angle Posted Connectors

English