

### Product Character

- Multilayer Metal -Silicon Potential Structure.
- Low Leakage Current.
- High Current Capability, High Efficiency.
- High Junction Temperature Capability.
- RoHs Product.


### Primary Use

- Low Voltage High Frequency Switching Power Supply.
- Low Voltage High Frequency Invers Circuit.
- Low Voltage Continued Circuit and Protection Circuit.


### Summarize

- MBRT10100CD Device optimized for ultra-low forward voltage drop to maximize efficiency in Power Supply applications.

### Equivalent Circuit



TO-263-2L



**MBRT10100CD**  
**MBRT10100G\*D**

G\*=Green / Halogen Free

## Absolute Maximum Ratings

Item	Symbol	Data	Unit
Maximal Inverted Repetitive Peak Voltage	$V_{RRM}$	100	V
*Average Rectified Forward Current (Rated VR-20Khz Square Wave) - 50% duty cycle	$I_{FAV}$	10	A
Forward Peak Surge Current(Rated Load 8.3 Half Mssine Wave-According to JEDEC Method)	$I_{FSM}$	120×2	A
Operating Junction Temperature	$T_J$	150	°C
Storage Temperature	$T_{STG}$	-40~150	°C
Typical Thermal Resistance(per leg)	Package=TO-263-2L $R_{\theta JC}$	2	°C/W


## Electricity Character

Item	Test Condition		Value(min)	Value(typ)	Value(max)	Unit
$V_B$	$T_J = 25^\circ\text{C}$	$I_R = 1\text{mA}$	100	---	---	V
$I_R$	$T_J = 25^\circ\text{C}$	$V_R = 100\text{V}$	---	---	0.05	mA
	$T_J = 125^\circ\text{C}$	$V_R = 100\text{V}$	---	---	10.00	mA
$V_F$	$T_J = 25^\circ\text{C}$	$I_F = 5\text{A}$ ( $I_{FAV} = 5\text{A} \times 2$ )	---	0.76	0.83	V
	$T_J = 125^\circ\text{C}$		---	---	0.72	V




### Characteristic Curves


The forward voltage and forward current curve

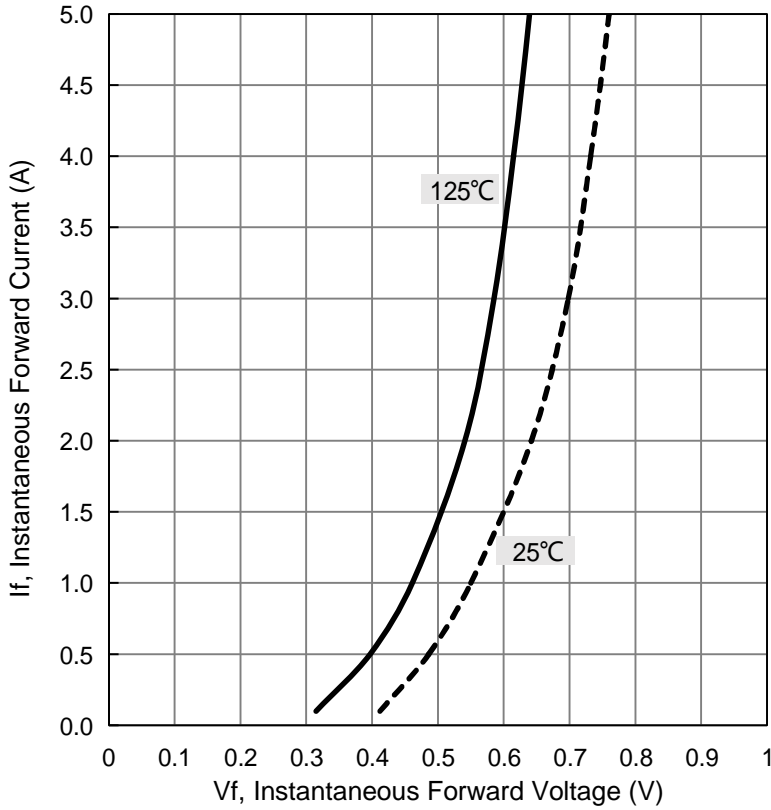

Current derating curve, per element

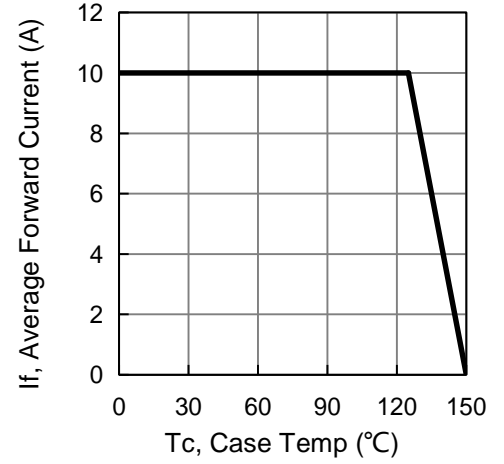


The reverse leak current and the reverse voltage (single-device) curve.

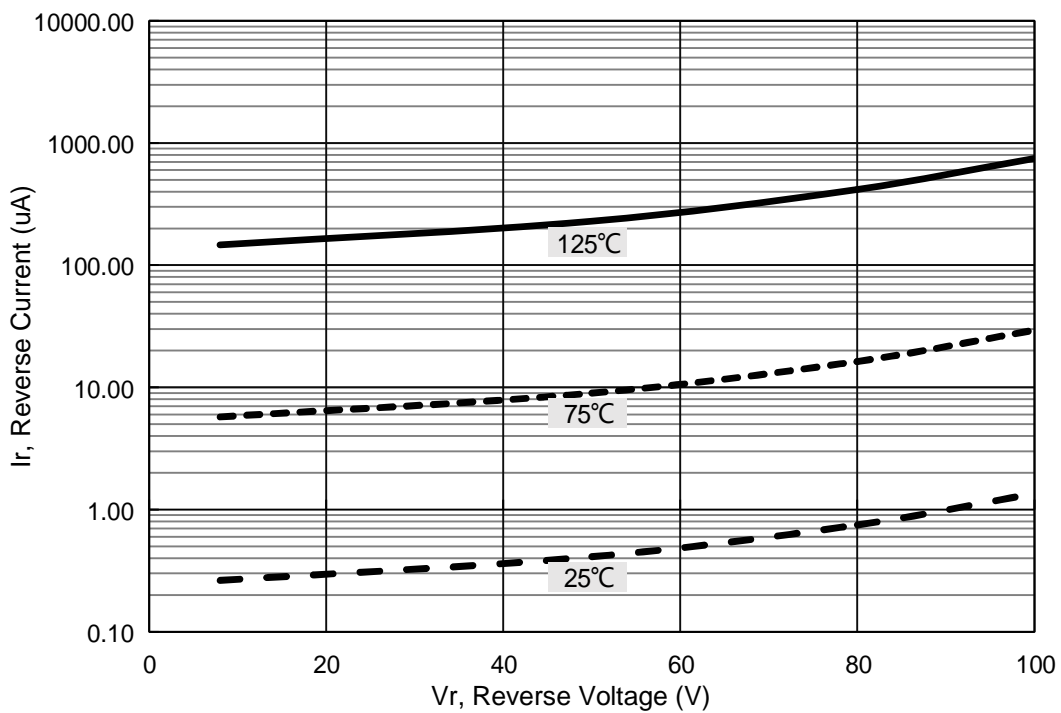



**Package Outline Dimensions**

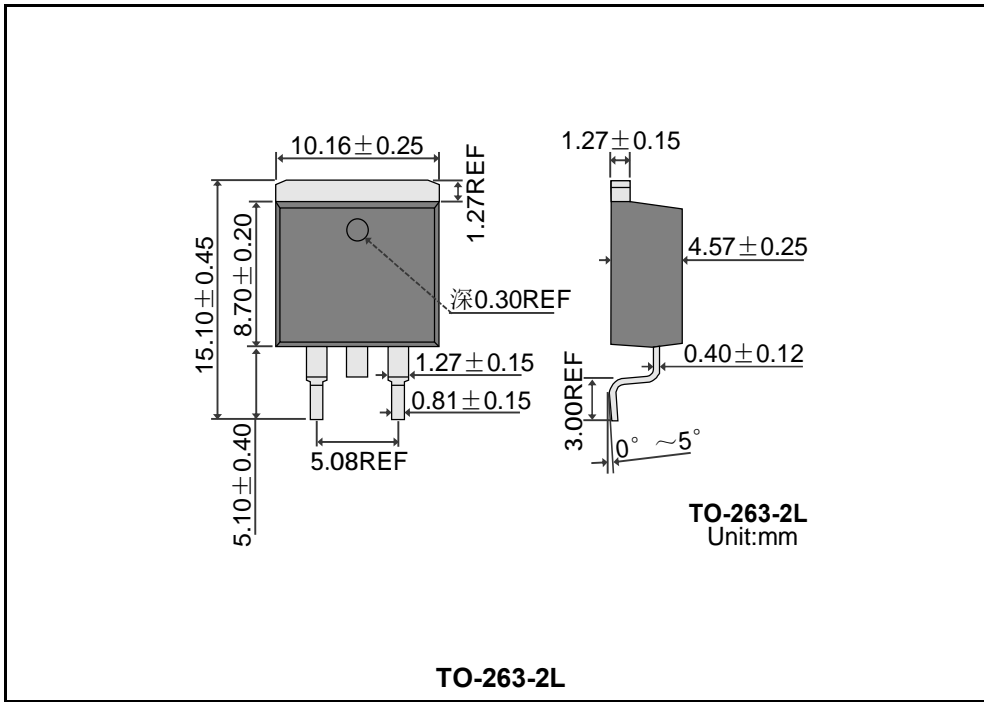

**Marking Information**



“DOWO”= Product Logo  
 “Marking Code”= The Following  
 “XXXX”= Date Code Marking

Package	Pb-Free		Green / Halogen Free	
	Marking Code	Part Number	Marking Code	Part Number
TO-263-2L	MBRT10100CD	MBRT10100CD	MBRT10100GD	MBRT10100G*D

**Packing Information**

Packaging	Package	Part Number	Quantity	Size
Tube	TO-263-2L	Tube	50 pieces	530*33*7mm
		Inner Box	1000 pieces	558*150*40mm
		Outer Box	5000 pieces	570*235*170mm
Reel	TO-263-2L	Reel	800 pieces	330*30mm
		Inner Box	800 pieces	345*345*35mm
		Outer Box	8000 pieces	375*375*350mm

**Notice:**

Hangzhou Dongwo Electronic Technology Co.,Ltd.,have the right to modify the specification revision, all information are subject to change without notice.