









Product NO.		DOSIN-801-0508		
REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	Mr. CHEN	2019/05/05	John kine
B				

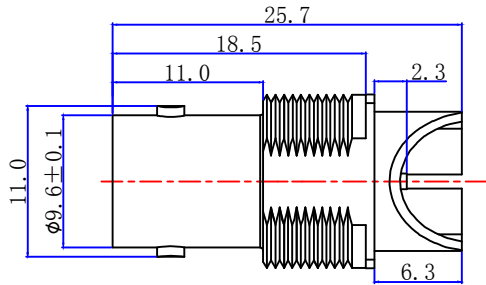


SCALE 2/1




RECOMMENDED
PANEL CUT-OUT

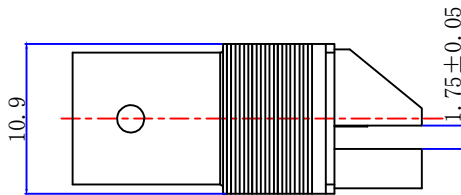

RECOMMENDED
PCB LAYOUT

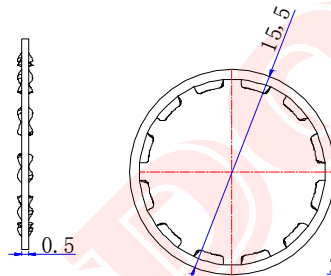

WASHER



NUT

SPECIFICATIONS:

Impedance: 75 Ohms
 Frequency Range: Please refer to the table above
 VSWR: 1.3max
 Working Voltage: 500v RMS @ SEA level
 Insulation Resistance: 5000 Ohms min
 Temperature Range: -55°C TO +155°C
 Drawings products are in line with ROHS standards

NOTE:	Tolerance	0-6 ±0.10 6-30 ±0.15 30-120 ±0.20 Angular ±5°
DRAWN Zelin. Zhang	View	
CHECKED	UNIT	MM
APPROVALS	SCALE	1:1

DOSIN *Dosin Industrial (H.K) Co. Ltd*
 东莞市德索五金电子制品有限公司
Dosin Hardware Electronics Co., Ltd
 E-mail: dosin2005@163.com
 dosin2005@dosin-china.com
 Web: http://www.dosinconn.com
 TEL: (0086) 769-81153906
 FAX: (0086) 769-81875836

Name: BNC JACK FOR PCB CONNECTOR

SIZE A Product NO. DOSIN-801-0508 REV A

DateTime 2019/05/05 CAD FILE H/company drawings/BD SHEET: 1 OF 1

NO	Component Number	Material	Finish
1	Body	Zinc	Gold
2	Contact pin	Phosphor copper	Gold
3	Insulation	PTFE	White
4	NUT	BRASS	Gold
5	WASHER	Iron	Gold