


Datasheet

Item No. 25.163.3353.0

Printed circuit board terminal 8291 / 3 Z OB

PCB Terminal Block, 3-pole, with Isolation Plate, without marking and location cam, pitch 5,08 mm, series: 8291/3 Z OB

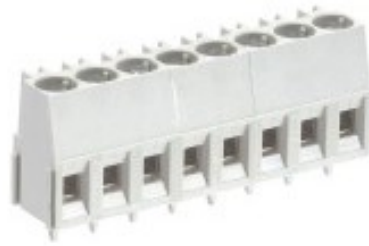

Item No.	25.163.3353.0
EAN	4015573176843
order unit	100 Piece(s)

Approvals



Technical data

General

Modular spacing	5.08 mm
Connection type	Screw connection
Soldering process	Wave soldering
Number of poles	3
Conductor to circuit board	180°
Number of levels	1
Integrated test socket	Yes
Insulation plate	Yes
Retaining pins	No
Marking	Yes

Technical data

Nominal cross section	2.5 mm ²
Rated current	16 A
Overvoltage Category I	1000 V
Overvoltage Category II	690 V
Overvoltage Category III	250 V
Rated impulse voltage	4 kV

Connection Data

Wire strip length	6.5 mm
Minimum cross section solid	0.14 mm ²
Maximum cross section solid	4 mm ²
Minimum cross section fine stranded	0.14 mm ²
Maximum cross section fine stranded	2.5 mm ²

Technical Data UL/CSA

Cross section UL	22-12 AWG
Voltage UL	300
Current field wiring	20 A
Current factory wiring	30 A
Cross section CSA	22-12 AWG
Voltage CSA	300 V
Current CSA	25 A

Other

Type of insulation material	Thermoplastic
Colour	Grey
Height	15 mm
Length	16.09 mm
Depth	9.5 mm
Material attachment screw	Steel
Material contact base	E-Cu
Material contact surface	Sn
Tightening torque note	If soldered additional mechanical fixing necessary

Accessories

Item. No.	Typ:	Description:
-----------	------	--------------

Drawings