


技术参数 SPECIFICATIONS

- ❑ 线数 (Poles) : 2~15(23)
- ❑ 适用线规 (Applicable wires) : AWG28#~22#
- ❑ 适应基板厚度 (Applicable PC board thickness) : 1.2~1.6mm
- ❑ 温度范围 (Temperature range) : -25℃~85℃
- ❑ 额定电压 (Voltage rating) : 250V.Ac/Dc
- ❑ 额定电流 (Current rating) : 2A
- ❑ 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- ❑ 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- ❑ 耐压 (Withstand voltage) : 1000V.Ac/1min
- ❑ 材料 (Material) :
 - 壳体 (Housing) : 尼龙 (PA66) UL94V-2(0)
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)


端子 TERMINAL(JC25)

型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins mm	数量 Quantity
	mm	AWG#		
HX25008-PT	0.08~0.3	28~22	1.0~1.8	7000PCS/盘

HX25008-PT(JC25)

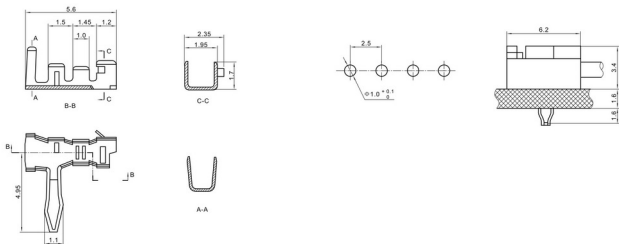

HX25008-Y(JC25)



安装尺寸 MOUNTING MEASUREMENT

壳体 HOUSING(JC25)

线数 Poles	型号 Type	尺寸 Dimensions(mm)	
		A	B
2	HX25008-2Y	2.5	5.6
3	HX25008-3Y	5.0	8.1
4	HX25008-4Y	7.5	10.6
5	HX25008-5Y	10.0	13.1
6	HX25008-6Y	12.5	15.6
7	HX25008-7Y	15.0	18.1
8	HX25008-8Y	17.5	20.6
9	HX25008-9Y	20.0	23.1
10	HX25008-10Y	22.5	25.6
11	HX25008-11Y	25.0	28.1
12	HX25008-12Y	27.5	30.6
13	HX25008-13Y	30.0	33.1
14	HX25008-14Y	32.5	35.6
15	HX25008-15Y	35.0	38.1
...
23	HX25008-23Y	55.0	58.1