


COIL: @ 25°C	
RESISTANCE	300 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	1.8 VDC

CUSTOMER DATA SHEET

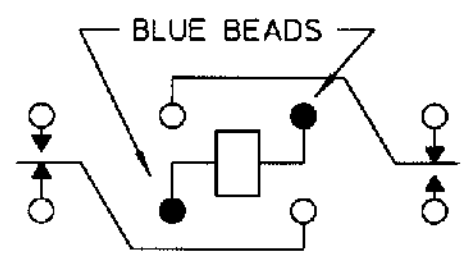

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	50	g's	11	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

CONTACT RATING: 10 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

NOTES: OPERATE & RELEASE 10 MS MAX.
OPERATE BOUNCE 2 MS MAX.
RELEASE BOUNCE 5 MS MAX.

DR. R.B. 4/24/98 CR *AK/2/98*



CUST. C. I. I. STD
CUST. NO. _____

TYPE '07' RELAY

B07A112BC1