

# Product data sheet

Specifications



## Panel mounted USB port, Harmony XB5, 3.0 port, plastic, 22mm, for USB interface jack type A

XB5PUSB3

Product availability: Stock - Normally stocked in distribution facility

Price\*: 38.66 USD

### Main

|                           |                        |
|---------------------------|------------------------|
| Range of Product          | Harmony XB5            |
| Product or Component Type | Panel mounted USB port |
| Device short name         | XB5P                   |

### Complementary

|                                       |   |
|---------------------------------------|---|
| Sale per indivisible quantity         | 1   |
| Mounting diameter                     | 0.9 in (22 mm)  |
| Thickness                             | 0.2 in (6 mm) without protection cover<br>0.06...0.2 in (1.5...5 mm) with protection cover plastic<br>0.06...0.2 in (1.5...5 mm) with protection cover rigid plastic<br>0.06...0.10 in (1.5...2.5 mm) with protection cover metal |
| Bezel material                        | Plastic   |
| Fixing collar material                | Plastic   |
| Integrated connection type            | USB 3.0 type A  |
| Minimum number of matings             | 1500 cycles   |
| IP degree of protection               | IP20 front: conforming to IEC 60529<br>IP20 back: conforming to IEC 60529   |
| Ambient Air Temperature for Operation | -40.0000000000...158.0000000000 °F (-40...70 °C)  |
| Ambient Air Temperature for Storage   | -40.0000000000...158.0000000000 °F (-40...70 °C)  |
| Tightening torque                     | 13.3 lbf.in (1.5 N.m)   |
| Vibration resistance                  | 5.35 gn15 min per axis  |
| Shock resistance                      | 30 gn 11 ms 3 chocks in each direction X, Y and Z   |
| Standards                             | USB 3.0   |
| Product Certifications                | CSA<br>UL Listed  |
| Height                                | 1.1 in (28 mm)  |
| Width                                 | 1.1 in (28 mm)  |
| Depth                                 | 1.7 in (44 mm)  |
| Net Weight                            | 0.0373 lb(US) (0.0169 kg)   |

### Ordering and shipping details

|          |              |
|----------|--------------|
| Category | US10CS200028 |
|----------|--------------|

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                   |               |
|-------------------|---------------|
| Discount Schedule | 0CS2          |
| GTIN              | 3606481194206 |
| Returnability     | Yes           |
| Country of origin | DE            |

## Packing Units

|                              |                         |
|------------------------------|-------------------------|
| Unit Type of Package 1       | PCE                     |
| Number of Units in Package 1 | 1                       |
| Package 1 Height             | 1.260 in (3.200 cm)     |
| Package 1 Width              | 1.969 in (5.000 cm)     |
| Package 1 Length             | 3.386 in (8.600 cm)     |
| Package 1 Weight             | 0.529 oz (15.000 g)     |
| Unit Type of Package 2       | S02                     |
| Number of Units in Package 2 | 100                     |
| Package 2 Height             | 5.906 in (15.000 cm)    |
| Package 2 Width              | 11.811 in (30.000 cm)   |
| Package 2 Length             | 15.748 in (40.000 cm)   |
| Package 2 Weight             | 4.057 lb(US) (1.840 kg) |

## Sustainability





**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)


[Guide to assess a product's sustainability >](#)

## Well-being performance

|   |                            |   |
|---|----------------------------|---|
|  | Reach Free Of Svhc         |   |
|  | Toxic Heavy Metal Free     |   |
|  | Mercury Free               |   |
|  | Rohs Exemption Information | Yes   |
| <hr/>   |                            |   |
| Reach Regulation  |                            | <a href="#">REACH Declaration</a>   |
| <hr/>   |                            |   |
| Eu Rohs Directive   |                            | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>   |
| <hr/>   |                            |   |
| China Rohs Regulation   |                            | <a href="#">China RoHS declaration</a>  |
| <hr/>   |                            |   |
| Weee  |                            | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.  |
| <hr/>   |                            |   |
| California Proposition 65   |                            | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| <hr/>   |                            |   |

Dimensions Drawings

Dimensions

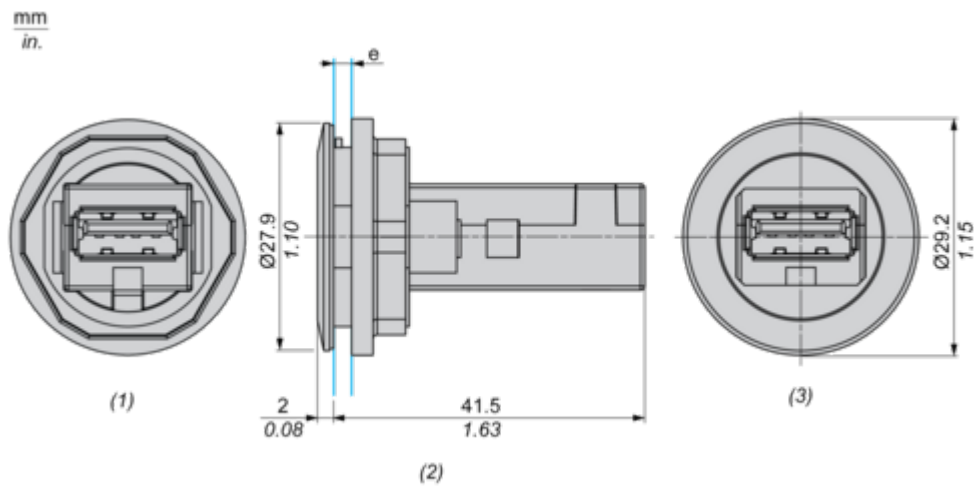

(1) Rear view

(2) Side view

(3) Front view


(e)

Clamping thickness without accessory: 1.5 mm to 5 mm / 0.05 in to 0.19 in  
Clamping thickness with ZBSP1 & ZBSP2: 1.5 mm to 5 mm / 0.05 in to 0.19 in  
Clamping thickness with ZBSP3: 1.5 mm to 2.5 mm / 0.05 in to 0.10 in

Mounting and Clearance

Panel Cut-out for Panel Mounted USB Port


Connection by Screw Clamp Terminals or Plug-in Connectors

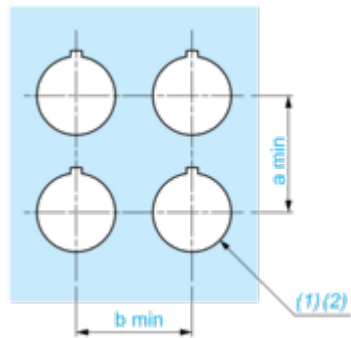

- (1) Diameter on finished panel or support
- (2) Ø22.5 mm recommended (Ø22.3 0+0.4) / Ø0.89 in. recommended (Ø0.88 in. 0+0.016)

| Connections                                  | a in mm | a in in. | b in mm | b in in. |
|--|---------|----------|---------|----------|
| By screw clamp terminal or plug-in connector | 35      | 1.38     | 35      | 1.38     |

Panel Cut-out

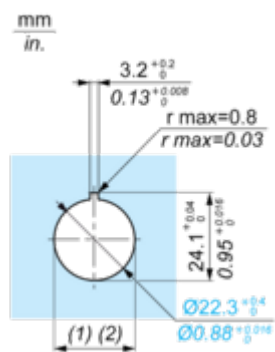

- (1) Diameter on finished panel or support
- (2) Ø22.5 mm recommended (Ø22.3 0+0.4) / Ø0.89 in. recommended (Ø0.88 in. 0+0.016)