


Description

The SEH0501P0 is a 5V bi-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive data and power line. The small size and high ESD surge protection make SEH0501P0 an ideal choice to protect cell phone, digital cameras, audio players and many other portable applications.

Features

- Low junction capacitance (Typical value: 3 pF)
- Working voltage: 5 V
- Low clamping voltage
- 2-pin leadless package
- RoHS Compliant

Dimensions & Symbol (Unit: mm Max)

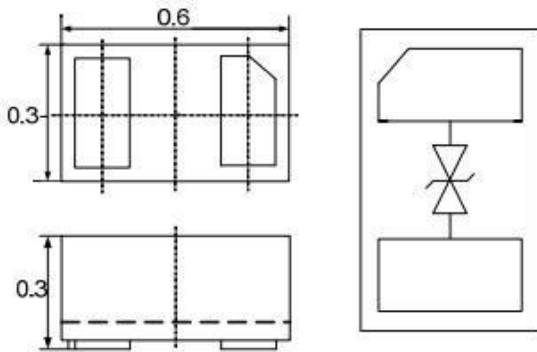

Dimensions

Pin and Circuit Schematic

Mechanical Characteristics

- Package: DFN0603-2L (0.6X0.3X0.3mm)
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound.
- UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 3 per J-STD-020

Applications


- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation, Digital Cameras, Peripherals
- Audio Players, Keypads, Side Keys, USB 2.0, LCD Displays

Marking & Ordering information



Part Number	Packaging	Reel Size
SEH0501P0	15000/Tape & Reel	7 inch

Part Number Information

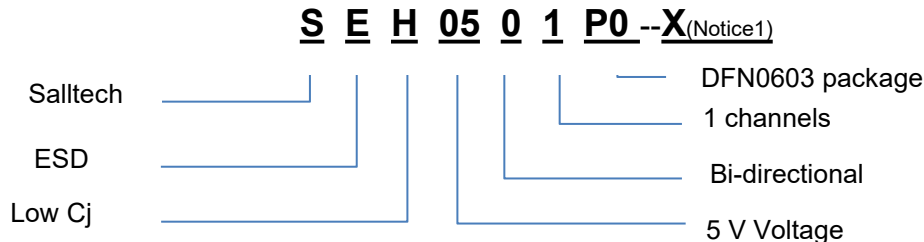

Notices1: X is Customer special code, if there any questions, please contact with local sales or email to sales@salltech.com

Absolute maximum ratings ($T_A=25^{\circ}\text{C}$, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power($t_p=8/20\mu\text{s}$ waveform)	PPPP	47	W
Peak Pulse Current($t_p=8/20\mu\text{s}$ waveform)	IPP	3.5	A
ESD per IEC 61000-4-2 (Air)	VESD	± 15	kV
ESD per IEC 61000-4-2 (Contact)		± 8	
Operating Temperature Range	TJ	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	Tstg	-55 to +150	$^{\circ}\text{C}$

Electrical characteristics ($T_A=25^{\circ}\text{C}$)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V_{RWM}			5	V	
Breakdown Voltage	V_{BR}	5.5			V	$I_T = 1\text{mA}$
Reverse Leakage Current	I_R			0.1	μA	$V_{RWM} = 5.0\text{V}$
Clamping Voltage	V_C			13.5	V	$I_{PP} = 3.5\text{A}$ (8 x 20 μs pulse)
Junction Capacitance	C_J		3	3.5	pF	$V_R = 0\text{V}$, $f = 1\text{MHz}$

Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

Figure 1: Pulse Waveform

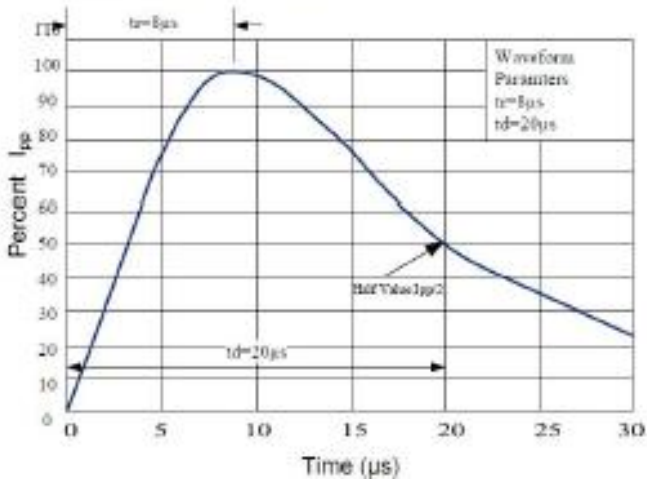


Figure 2: Power Derating Curve

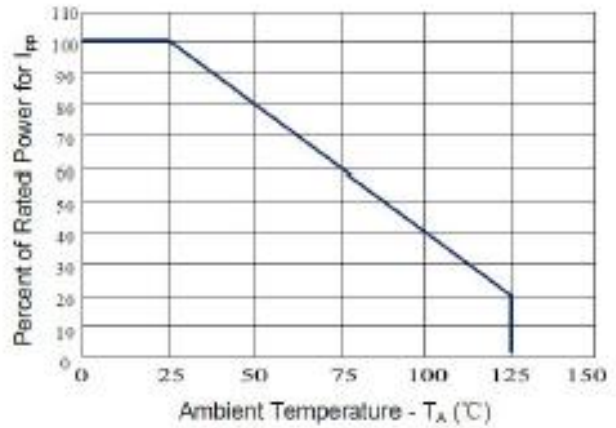


Figure 3: Normalized Junction Capacitance

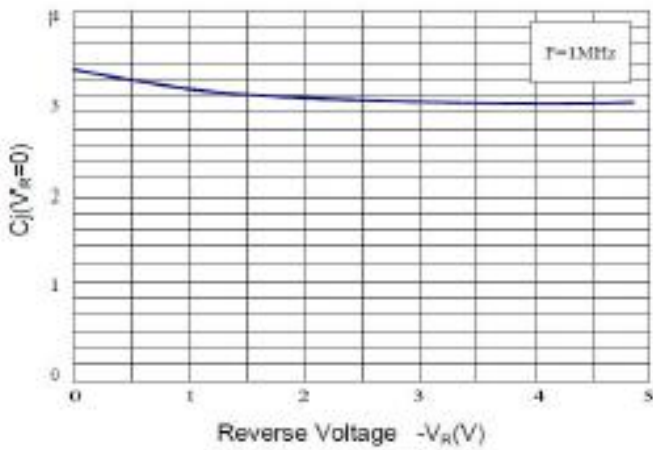


Table 1. IEC 61000-4-2 Discharge Parameters

Level	First Peak Current (A)	Peak Current at 30 ns (A)	Peak Current at 60 ns (A)	Test Voltage (Contact Discharge) (kV)	Test Voltage (Air Discharge) (kV)
1	7.5	4	2	2	2
2	15	8	4	4	4
3	22.5	12	6	6	8
4	30	16	8	8	15

Figure 4: ESD Clamping(8kV Contact per IEC 61000-4-2)



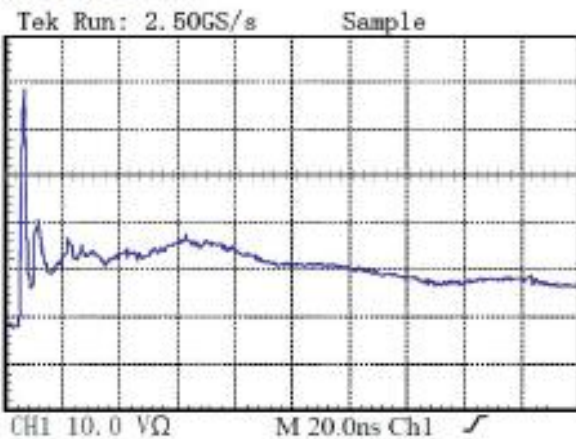


Figure 5: IEC 61000-4-2 Waveform

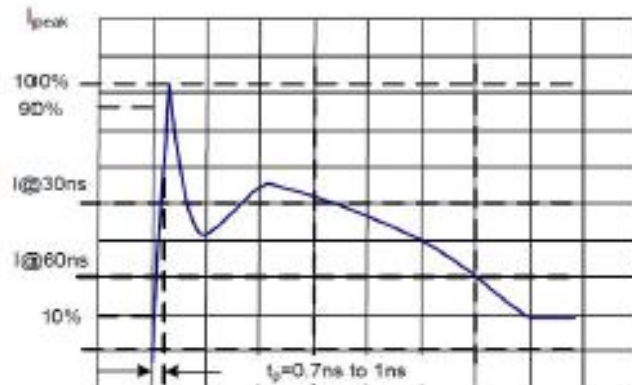


Soldering Parameters

Reflow Condition		Pb-Free assembly (see as bellow)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquid us Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L) (Liquid us)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_p)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		30 secs. Max
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_p)		8 min. Max
Do not exceed		+260°C

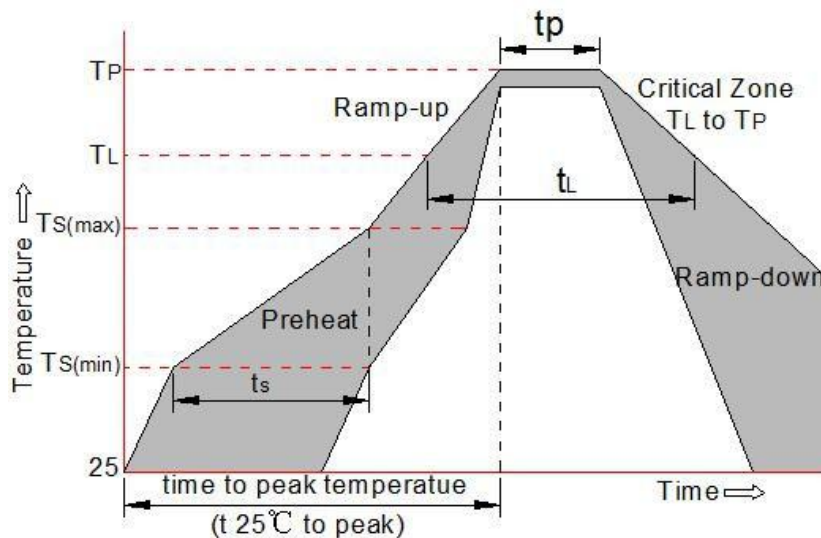


Package Mechanical Data

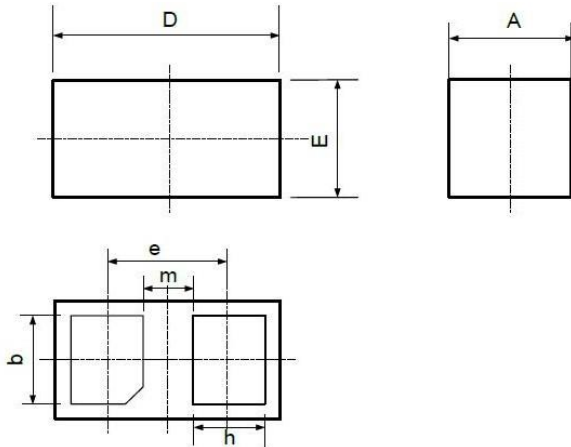


SYM	DIMENSIONS	
	MILLIMETERS	
	MIN	MAX
A	0.28	0.32
D	0.55	0.65
E	0.25	0.35
b	0.20	0.30
e	0.350	
m	0.165	
h	0.07	0.17

Suggested Land pattern of PCB design

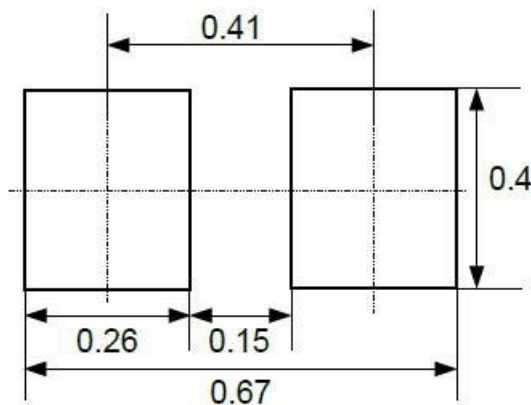


Tape and Reel Information

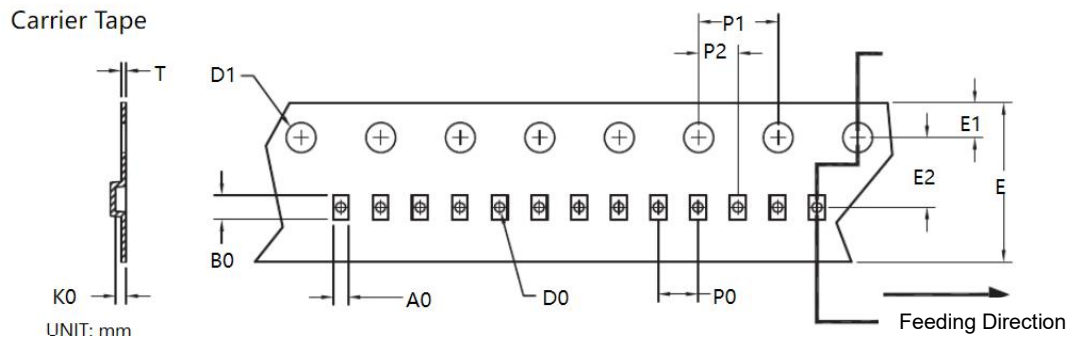

Dimensions are in millimeter

Package type	A0	B0	D0	P0	P1	P2	P	E	E1	E2	D1	K0	T	Q'ty
DFN0603-2L	0.35	0.65	0.2	2.0	4.0	2.0	4.0	8.0	1.75	3.50	2.0	0.60	0.25	15000

DFN0603 Traller, Leader and Reel

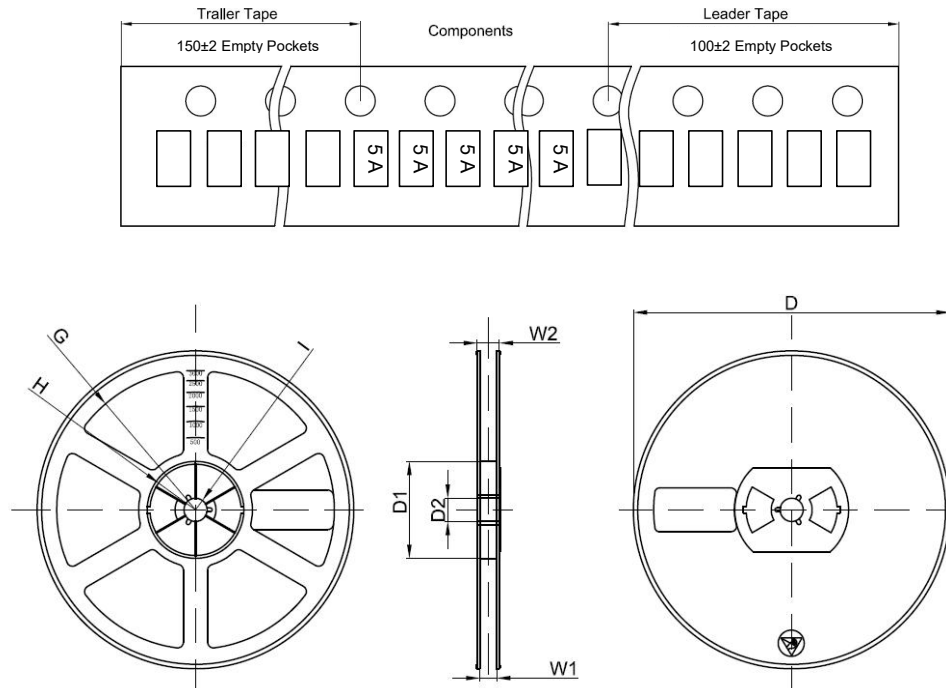

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"D1a	178	54.40	13.00	78	25.60	6.50	14.40	12.30

Contact Information

JIANGXI Salltech Microelectronics Technology Co.,Ltd.
 N0.699 Huangtang East Street,Ganjiang New District, Nanchang city,Jiangxi province
 Tel: +86-791-83962891
 Fax: +86-791-83962890

Revision History

Release Date	Revision	Comments
2017-8-17	A	New Release
2021-11-13	B	Add Body Mark, Tape and Reel information