
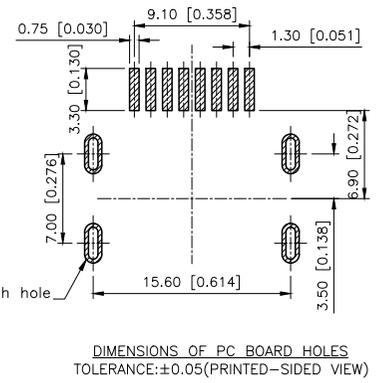


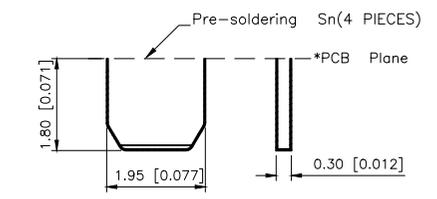
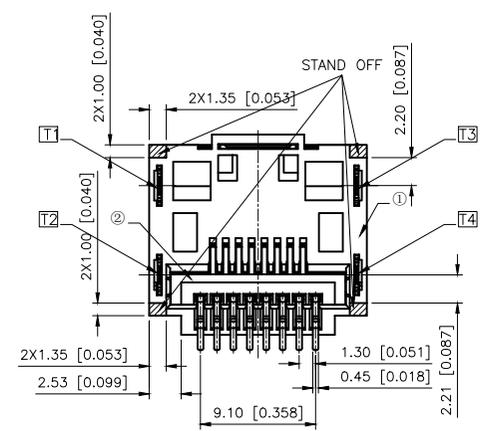
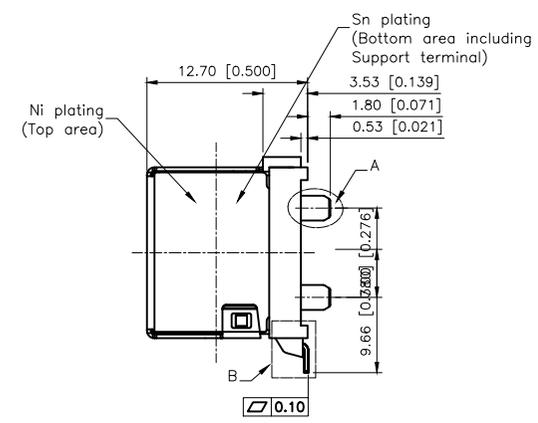
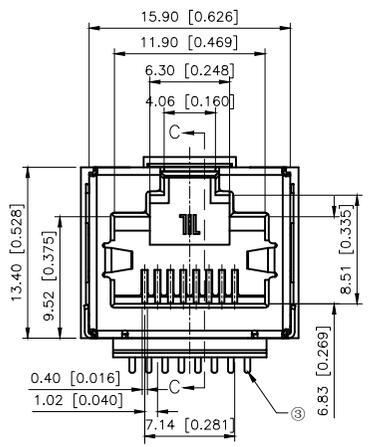
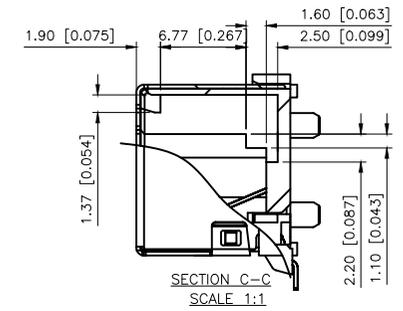





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2025.04.26	阿树

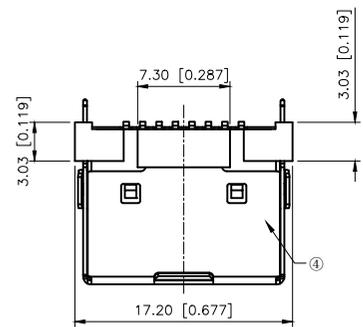

MATERIAL 材料:
 HOUSING 外壳: LCP,UL94V-0,BLACK.
 TERMINAL 端子: PHOSPHOR BRONZE ,
 GOLD PLATING ON CONTACT AREA.

MECHANICAL 机械:
 DURABILITY 耐用性: 750 CYCLES MIN.10 mm/S
 INSERTION FORCE 插入力: 2.0KG.F MAX
 Withdrawal Force 拔出力: 44N Max.
 OPERATING TEMPERATURE 工作温度: 0°C~+85°C.
 STORAGE TEMPERATURE 储存温度: -40°C~+80°C.

ELECTRICAL 电动:
 RATED VOLTAGE 额定电压:150 VOLTS AC
 CURRENT RATING 额定电流:1.5A AC
 DIELECTRIC STRENGTH 介电强度:500V AC ,2mA shall be applied between adjacent contacts for 1 minute at 50 or 60 Hz.
 INSULATION RESISTANCE 绝缘电阻:500 MEGA OHMS MIN.INITIAL AFTER 500V DC FOR 1 MINUTE
 CONTACT RESISTANCE 接触电阻:100mΩ or less

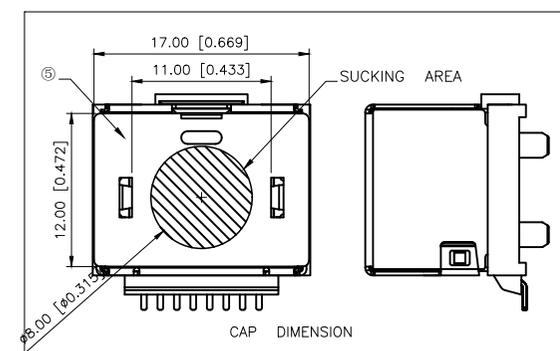

X05ADGWW6SBL1

1:Au=1U"
 3:Au=3U"
 4:Au=6U"
 5:Au=15U"
 6:Au=30U"

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	RJ JACK
CHECKED		UNIT:	mm/in	PART NO.:	X05ADGWW6SBL1
APPROVED		SIZE:	A4	DWG NO.:	