
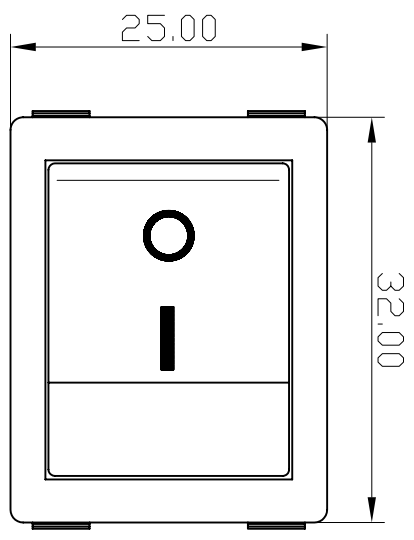


PANEL CUT-OUT		
Z	Y	X
0.70~1.25	22.10~22.20	30.1~30.2
1.25~2.00	22.10~22.20	30.3~30.4
2.00~3.00	22.10~22.20	30.4~30.5

NOTES:

- Rating:
CCC 16(4)A 250V AC T105/55
VDE ENEC 16(4)A 250V AC T85/55
KC 16(4)A 250V AC T185/55
UL cUL 16GPA 125V AC/16GPA 250V AC T105/55
- Circuit Diagram: 4P ON-OFF
- Terminal Strength: $\geq 80\text{N}$
- Electrical life: ≥ 10000 cycles
- Withstand Voltage: Withstand Voltage: 1500VAC 1min
- Terminals to Button: 3000VAC 1min
- Leakage Current: 1mA
- Current resistance: $\leq 50\text{m}\Omega$ (initial)
- Insulation resistance: $\geq 100\text{M}\Omega$ 500V DC
- Body Material: NYLON 66 94V-2~0



普通公差:
COMMON TOLERANCE:

A4		
A3		
A2	UP TO 5	± 0.20
A1	ABOVE 5 TO 30	± 0.30
REV.	ABOVE 30	± 0.50
	ANGULAR	$\pm 5^\circ$

深圳市华灿天禄电子有限公司

DATE	REVISION DESCRIPTION	ISSUE	UNIT	mm	PROJECED	核影	品名	跷板开关	比例	Free
			DATE		CHECKED BY	核对	型号	RS606		
			DATE		APPROVAL BY	核准	图号	RS606BE-2010002CBB		