

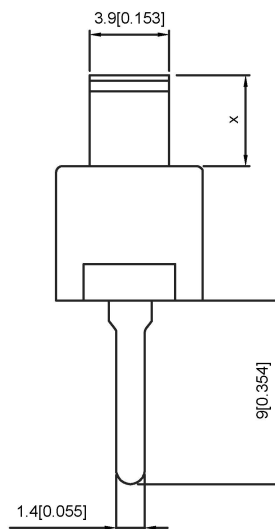


**Specification:**

1. Rating: 6A 120VAC
2. Contact resistance:  $\leq 30 \text{ m}\Omega$
3. Insulation resistance:  $\geq 100 \text{ M}\Omega$  (DC500V/Min)
4. Electronics life:  $> 10000$  cycles
5. Operation force:  $250 \pm 100 \text{ gf}$

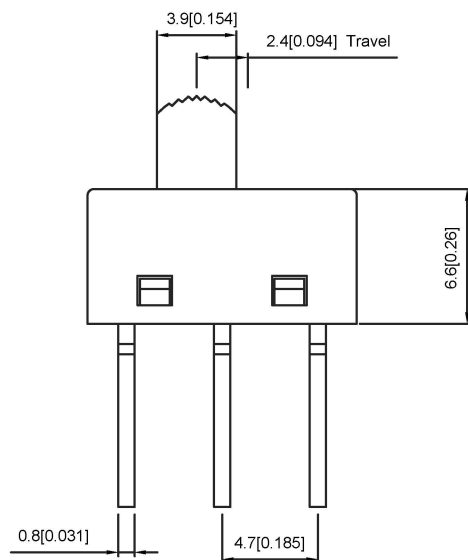

**SS-12M10 X X**



ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
7	Terminal	1	Phosphor bronze	Plating silvering
6	Bridge piece	1	Phosphor bronze	Plating silvering
5	Spring	1	carbon steel	
4	Rotor	1	Iron sleeve	NI
3	Base	1	PA46	
2	Shell	1	PA46	
1	Keystake	1	PA66	

Function		
ON	NA	ON
	/	

广东星坤科技股份有限公司

生	日期
效	
效	
效	
MARK	文件工程章

DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm/in
APPD		DATE		SIZE: A4

MODEL TYPE:	SLIDE SWITCH
PART NO.:	
DWG NO.:	SS-12M10XX
WEIGHT	1.0g
SHEET	1/1
REVISION	A0

KKB INDUSTRIAL PRECISION CO., LIMITED