

**General Description**

The 74LVC1G19 is a high-performance non-inverting 1-to-2 demultiplexer. With the Select input [S] at Low, data at A is passed to Y0 and Y1 is set to high impedance. With the Select input [S] at High, data at A is passed to Y1 and Y0 is set to high impedance. The device operates over the voltage range from 1.65V to 5.5V.

This device has been optimized for on-board buffering applications and offers mixed (1.65V, 2.3V, 3.0V and 5.5V) voltage capability by providing over voltage tolerance (OVT) circuitry on I/O pins.

**Features**

- Designed for 1.65V to 5.5V VCC Operation
- High-Speed Propagation Delay  $t_{PD}$  2.9nS (Typ)@3.3V, Load 50pF
- Power Down Impedance Outputs in High-Z
- Output Drive Capability 32mA
- These Devices are Pb-Free and are RoHS Compliant
- Packages are SC70-6, SOT23-6 or small DFN6
- MSL3(SC70-6, SOT23-6, DFN6)

**Pin Configuration**

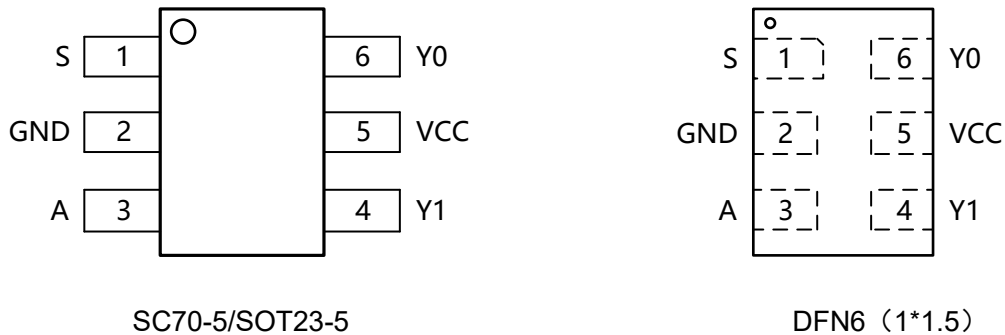


Figure1. Pin Top View

**Pin Function**

Pin No.	Pin Name	Pin Function
1	S	Demultiplexer Select
2	GND	Ground
3	A	Data Input
4	Y1	Output 2
5	VCC	Power
6	Y0	Output 1

**Block Diagram**

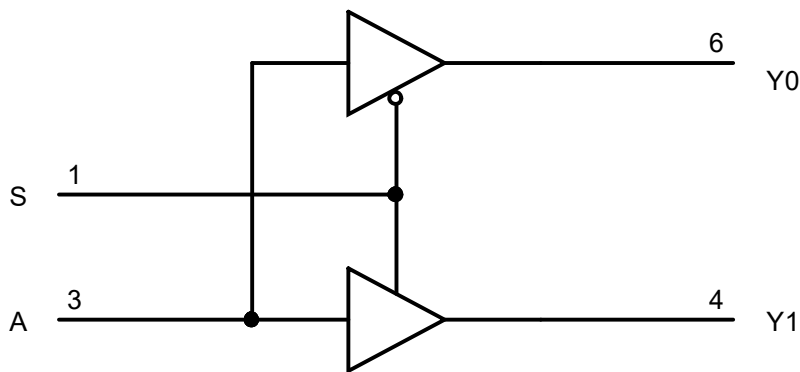


Figure2. Logic Symbol

**Functional Description**

**Function Table**

Input		Output	
S	A	Y0	Y1
L	L	L	H
L	H	H	H
H	L	H	L
H	H	H	H

### Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
$V_{CC}$	DC Supply Voltage		-0.5 to 7.0	V
$V_I$	DC Input Voltage <sup>(1)</sup>		$-0.5 \leq V_I \leq +7.0$	V
$V_O$	DC Output Voltage Output in Higher or Low State		-0.5 to $V_{CC} + 0.5$	V
$I_{IK}$	DC Input Diode Current	$V_I < GND$	-50	mA
$I_{OK}$	DC Output Diode Current	$V_O < GND, V_O > V_{CC}$	$\pm 50$	mA
$I_O$	DC Output Sink Current		$\pm 50$	mA
$I_{CC}$	DC Supply Current per Supply Pin		$\pm 100$	mA
$I_{GND}$	DC Ground Current per Supply Pin		$\pm 100$	mA
$T_{STG}$	Storage Temperature Range		-65 to 150	°C
$T_L$	Lead Temperature, Soldering 10 Seconds		260	°C
$T_J$	Max Junction Temperature		150	°C
$V_{ESD}$	ESD Classification	Human Body Model	$\pm 4000$	V
		Charged Device Model	$\pm 1000$	
$I_{LU}$	Max Latch up Current Above $V_{CC}$ and GND at 125°C		$\pm 100$	mA

### Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
$R_{\theta JA}$	SC70-6	Thermal Characteristics, Thermal Resistance, Junction-to-Air	280	°C/W
	SOT23-6		180	
	DFN6(1.0×1.5)		440	
$P_D$	SC70-6	Power Dissipation in Still Air at 85°C	230	mW
	SOT23-6		360	
	DFN6(1.0×1.5)		150	

**Recommended Operating Conditions**

Symbol	Parameter	Min	Max	Unit	
V <sub>CC</sub>	DC Supply Voltage	1.65	5.5	V	
	Operating Date Retention	1.5	5.5		
V <sub>IN</sub>	DC Input Voltage	0	5.5	V	
V <sub>OUT</sub>	DC Output Voltage(High or Low State)	0	5.5	V	
T <sub>A</sub>	Operating Temperature Range	-40	85	°C	
t <sub>r</sub> ,t <sub>f</sub>	Input Rise and Fall Time	V <sub>CC</sub> = 2.5 V ± 0.2 V	0	20	ns/V
		V <sub>CC</sub> = 3.0 V ± 0.3 V	0	10	
		V <sub>CC</sub> = 5.0 V ± 0.5 V	0	5	

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied.

**Electrical Characteristics**
**DC Electrical Characteristics**

Symbol	Parameter	Condition	V <sub>CC</sub> (V)	T <sub>A</sub> = 25°C			-40°C ≤ T <sub>A</sub> ≤ 85°C		Unit
				Min	Typ	Max	Min	Max	
V <sub>IH</sub>	High-Level Input Voltage		1.65-1.95 2.3-5.5	0.75V <sub>CC</sub> 0.7V <sub>CC</sub>			0.75V <sub>CC</sub> 0.7V <sub>CC</sub>		V
V <sub>IL</sub>	Low-Level Input Voltage		1.65-1.95 2.3-5.5			0.25V <sub>CC</sub> 0.3V <sub>CC</sub>		0.25V <sub>CC</sub> 0.3V <sub>CC</sub>	V
V <sub>OH</sub>	High-Level Output Voltage	I <sub>OH</sub> =-100uA	1.65-5.5	V <sub>CC</sub> -0.1	V <sub>CC</sub>		V <sub>CC</sub> -0.1		V
		I <sub>OH</sub> =-3mA	1.65	1.29	1.52	1.29			
		I <sub>OH</sub> =-8mA	2.3	1.9	2.1	1.9			
		I <sub>OH</sub> =-12mA	2.7	2.2	2.4	2.2			
		I <sub>OH</sub> =-16mA	3.0	2.4	2.7	2.4			
		I <sub>OH</sub> =-24mA	3.0	2.3	2.5	2.3			
		I <sub>OH</sub> =-32mA	4.5	3.8	4.0	3.8			
V <sub>OL</sub>	Low-Level Output Voltage	I <sub>OL</sub> =100uA	1.65-5.5		0.0	0.1		0.1	V
		I <sub>OL</sub> =3mA	1.65		0.08	0.24		0.24	
		I <sub>OL</sub> =8mA	2.3		0.20	0.3		0.3	
		I <sub>OL</sub> =12mA	2.7		0.22	0.4		0.4	
		I <sub>OL</sub> =16mA	3.0		0.28	0.4		0.4	
		I <sub>OL</sub> =24mA	3.0		0.38	0.55		0.55	
		I <sub>OL</sub> =32mA	4.5		0.42	0.55		0.55	
I <sub>IN</sub>	Input Leakage Current	V <sub>IN</sub> =5.5V or GND	0-5.5		±0.1			±1.0	uA

$I_{OFF}$	Power Off Leakage Current	$V_{IN}=5.5V$ or $V_{OUT}=5.5V$	0			1		10	$\mu A$
$I_{CC}$	Quiescent Supply Current	$V_{IN}=5.5V$ or GND	5.5					10	$\mu A$

**AC Electrical Characteristics**
 $t_r = t_f = 2.5ns$ 

Symbol	Parameter	Condition	$V_{CC}(V)$	$T_A = 25^\circ C$			$-40^\circ C \leq T_A \leq 85^\circ C$		Unit
				Min	Typ	Max	Min	Max	
$t_{PLH}$ $t_{PHL}$	Propagation Delay (Figure 3/4)	$R_L = 1M\Omega$ $C_L = 15pF$	1.65	2.0	5.3	11.4	2.0	12.0	ns
			1.8	2.0	4.4	9.5	2.0	10.0	
		$R_L = 1M\Omega$ $C_L = 15pF$	$2.5 \pm 0.2$	0.2	3.5	6.5	0.8	7.0	
		$R_L = 500\Omega$ $C_L = 50pF$	$3.3 \pm 0.3$	0.8	2.1	4.5	0.5	4.7	
				1.2	2.9	5.5	1.5	5.2	
		$R_L = 1M\Omega$ $C_L = 15pF$	$5.0 \pm 0.5$	0.5	1.8	3.9	0.5	4.1	
$R_L = 500\Omega$ $C_L = 50pF$	0.8	2.4		4.3	0.8	4.5			

**Capacitive Characteristics**

Symbol	Parameter	Condition	Typical	Unit
$C_{IN}$	Input Capacitance	$V_{CC} = 5.5V$ , $V_I = 0V$ or $V_{CC}$	>2.5	pF
$C_{PD}$	Power Dissipation Capacitance <sup>(2)</sup>	10MHz, $V_{CC} = 3.3V$ , $V_I = 0V$ or $V_{CC}$	9	pF
		10MHz, $V_{CC} = 5.5V$ , $V_I = 0V$ or $V_{CC}$	11	

2.  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Test Waveform

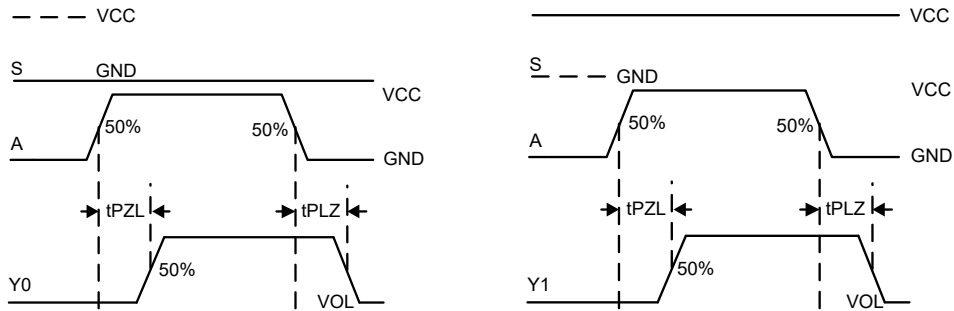


Figure 3/4 Switching Waveform


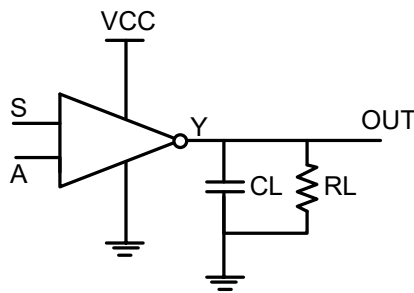


Figure 5. Test Circuit


Package Dimension

SC70-5 (SOT353)

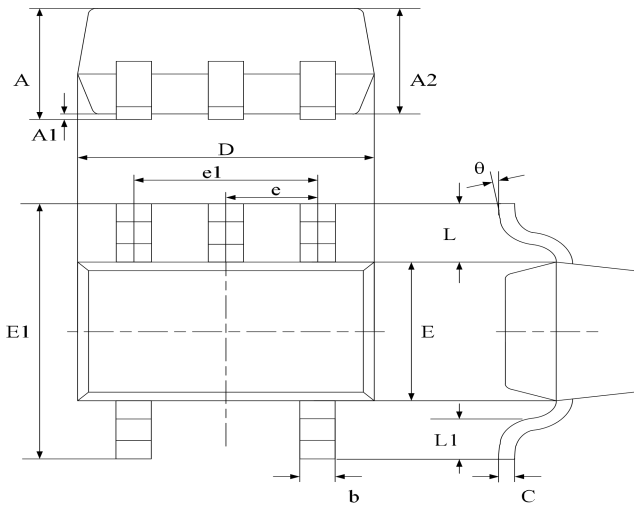


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.800	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.800	0.900	0.035	0.039
b	0.150	0.350	0.006	0.014
C	0.080	0.150	0.003	0.006
D	1.8500	2.150	0.079	0.087
E	1.100	1.400	0.045	0.053
E1	1.950	2.200	0.085	0.096
e	0.850 typ.		0.026 typ.	
e1	1.200	1.400	0.047	0.055
L	0.42 ref.		0.021 ref.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

SOT23-5

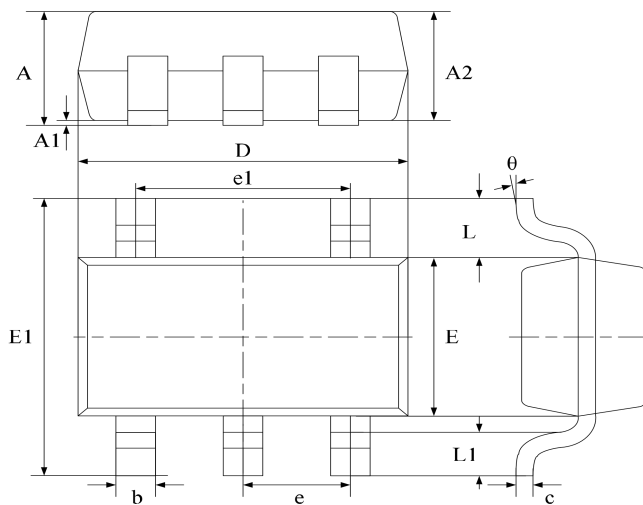

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.040	1.350	0.042	0.055
A1	0.040	0.150	0.002	0.006
A2	1.000	1.200	0.041	0.049
b	0.380	0.480	0.015	0.020
c	0.110	0.210	0.004	0.009
D	2.720	3.120	0.111	0.127
E	1.400	1.800	0.057	0.073
E1	2.600	3.000	0.106	0.122
e	0.950 typ.		0.037 typ.	
e1	1.900 typ.		0.078 typ.	
L	0.700 ref.		0.028 ref.	
L1	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

DFN6(1.0×1.5)

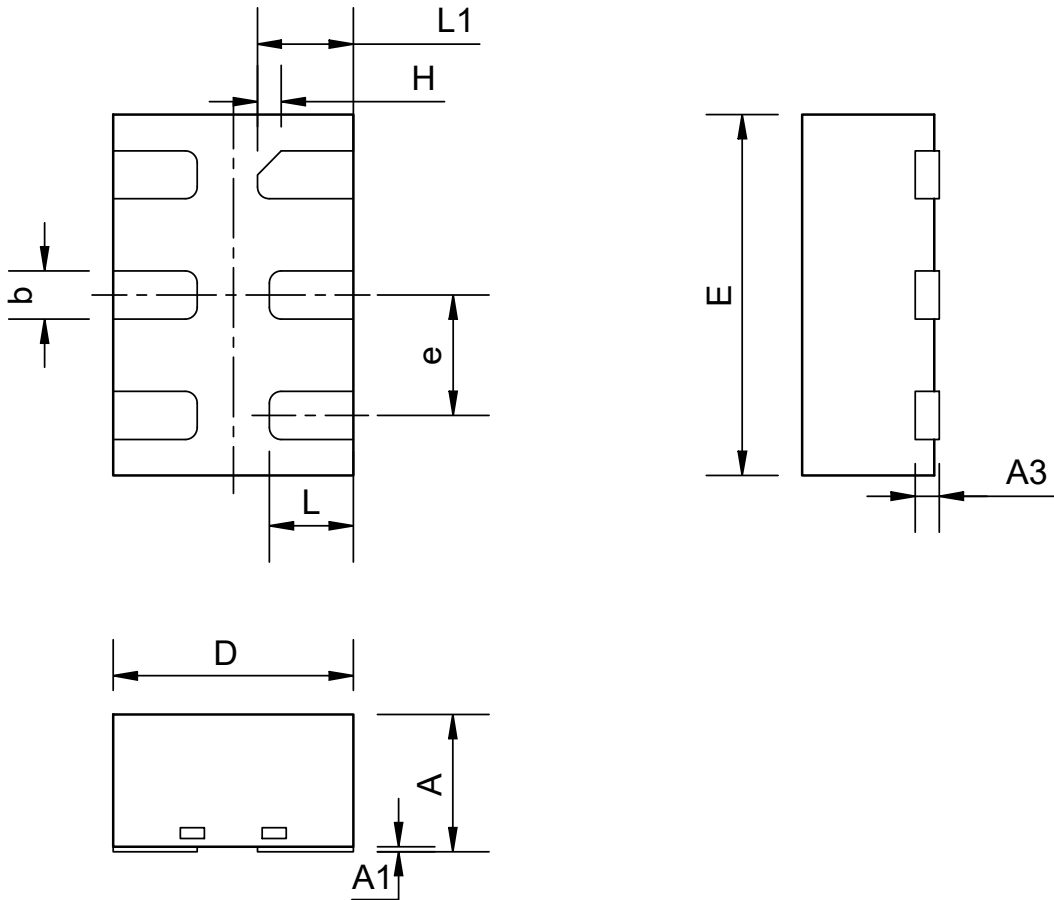

COMMON DIMENSIONS  
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.50	--	0.60
A1	0	0.02	0.05
A3	0.10REF		
b	0.15	0.20	0.25
D	0.90	1.00	1.10
E	1.40	1.50	1.60
e	0.40	0.50	0.60
H	0.10REF		
L	0.30	0.35	0.40
L1	0.35	0.40	0.45



**Ordering information**

Order code	Package	Baseqty	Deliverymode	Marking code
UMW SN74LVC1G19DBVR	SOT23-5	3000	Tape and reel	C195 U
UMW SN74LVC1G19DCKR	SC70-5	3000	Tape and reel	CYF U
UMW SN74LVC1G19DRYR	DFN6	5000	Tape and reel	CY U