



Product Specification

XBLW SN74LS240

Octal Buffers and Line Drivers With 3-State Outputs

WEB | www.xinboleic.com




Description

The SN74LS240 is an 8-bit inverting buffer/line driver with 3-state outputs. The device can be used as two 4-bit buffers or one 8-bit buffer. The device features two output enables (1OE and 2OE), each controlling four of the 3-state outputs. A HIGH on nOE causes the outputs to assume a high-impedance OFF-state. Inputs include clamp diodes that enable the use of current limiting resistors to interface inputs to voltages in excess of V_{CC} .

Features

- Inverting 3-state outputs
- Specified from -20°C to $+85^{\circ}\text{C}$
- Packaging information: DIP-20/SOP-20/TSSOP-20

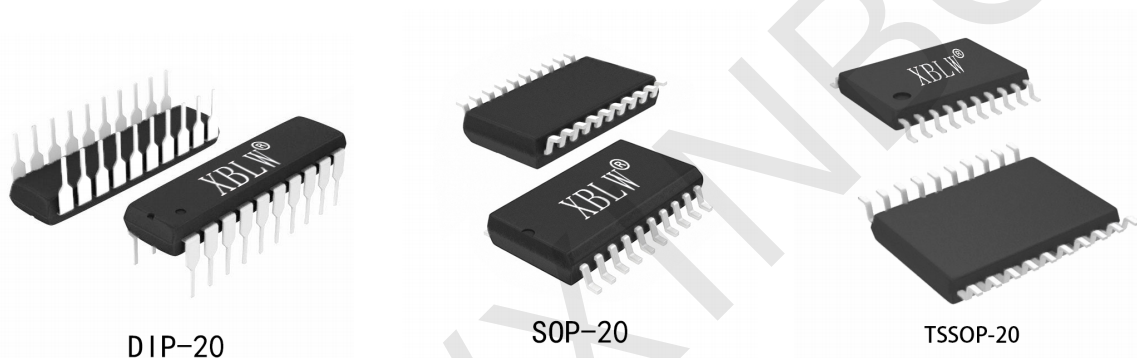

ORDERING INFORMATION

Product Model	Package Type	Marking	Packing	Packing Qty
XBLW SN74LS240N	DIP-20	74LS240N	Tube	720Pcs/Box
XBLW SN74LS240DTR	SOP-20	74LS240	Tape	2000Pcs/Reel
XBLW SN74LS240TDTR	TSSOP-20	74LS240	Tape	2000Pcs/Reel

Block Diagram

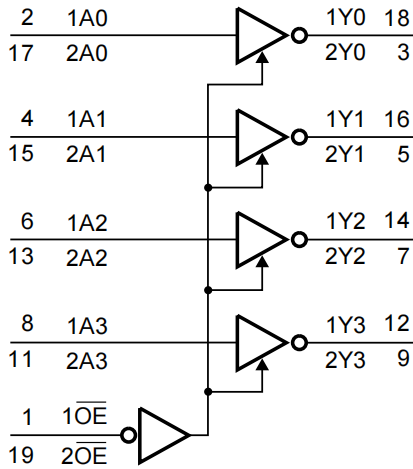


Figure 1. Logic symbol

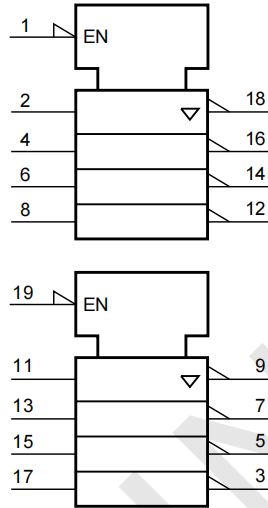


Figure 2. IEC Logic symbol


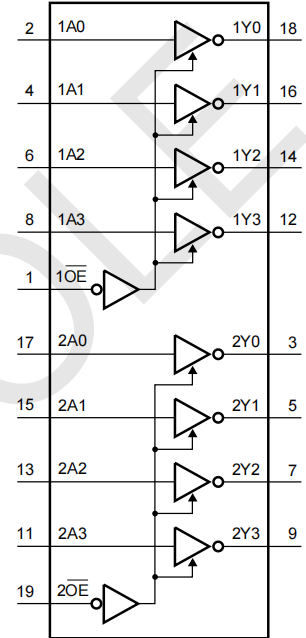


Figure 3. Functional diagram

Pin Configurations

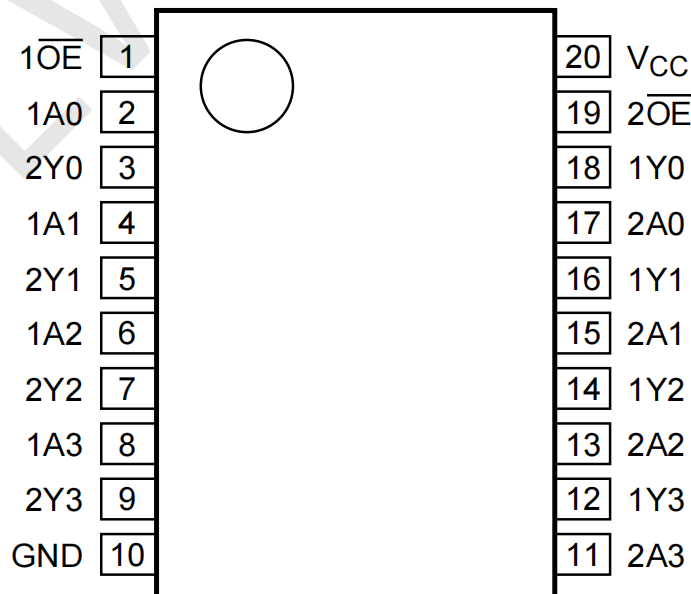

Pin Description

Pin No.	Pin Name	Description
1	- 1OE	output enable input(active LOW)
2	1A0	data input
3	2Y0	bus output
4	1A1	data input
5	2Y1	bus output
6	1A2	data input
7	2Y2	bus output
8	1A3	data input
9	2Y3	bus output
10	GND	ground(0V)
11	2A3	data input
12	1Y3	bus output
13	2A2	data input
14	1Y2	bus output
15	2A1	data input
16	1Y1	bus output
17	2A0	data input
18	1Y0	bus output
19	- 2OE	output enable input(active LOW)
20	V _{CC}	supply voltage

Function Table

Input		Output
nOE	nAn	nYn
L	L	H
L	H	L
H	X	Z

Note: H=HIGH voltage level; L=LOW voltage level; X=don't care; Z= high-impedance OFF-state.

Electrical Parameter

Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Max.	Unit
supply voltage	V_{CC}	-	-0.5	+7.0	V
input clamping current	I_{IK}	$V_I < -0.5V$ or $V_I > V_{CC} + 0.5V$	-	± 20	mA
output clamping current	I_{OK}	$V_O < -0.5V$ or $V_O > V_{CC} + 0.5V$	-	± 20	mA
output current	I_O	$-0.5V < V_O < V_{CC} + 0.5V$	-	± 35	mA
supply current	I_{CC}	-	-	70	mA
ground current	I_{GND}	-	-70	-	mA
storage temperature	T_{stg}	-	-65	+150	°C
total power dissipation	P_{tot}	-	-	500	mW
soldering temperature	T_L	10s	DIP	245	°C
			SOP	250	

Note:

[1] For DIP20 packages: above 70°C the value of P_{tot} derates linearly with 12mW/K.

[2] For SOP20 packages: above 70°C the value of P_{tot} derates linearly with 8mW/K.

[3] For (T)SSOP20 packages: above 60°C the value of P_{tot} derates linearly with 5.5mW/K.

Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
supply voltage	V_{CC}	-	2.0	5.0	6.0	V
input voltage	V_I	-	0	-	V_{CC}	V
output voltage	V_O	-	0	-	V_{CC}	V
input transition rise and fall rate	$\Delta t / \Delta V$	$V_{CC}=2.0V$	-	-	625	ns/V
		$V_{CC}=4.5V$	-	1.67	139	ns/V
		$V_{CC}=6.0V$	-	-	83	ns/V
ambient temperature	T_{amb}	-	-20	-	+85	°C

Electrical Characteristics

DC Characteristics 1

(Tamb=25°C, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
HIGH-level input voltage	V_{IH}	$V_{CC}=2.0V$		1.5	1.2	-	V
		$V_{CC}=4.5V$		3.15	2.4	-	V
		$V_{CC}=6.0V$		4.2	3.2	-	V
LOW-level input voltage	V_{IL}	$V_{CC}=2.0V$		-	0.8	0.5	V
		$V_{CC}=4.5V$		-	2.1	1.35	V
		$V_{CC}=6.0V$		-	2.8	1.8	V
HIGH-level output voltage	V_{OH}	$V_I=V_{IH}$ or V_{IL}	$I_O=-20\mu A; V_{CC}=2.0V$	1.9	2.0	-	V
			$I_O=-20\mu A; V_{CC}=4.5V$	4.4	4.5	-	V
			$I_O=-20\mu A; V_{CC}=6.0V$	5.9	6.0	-	V
			$I_O=-6.0mA; V_{CC}=4.5V$	3.98	4.32	-	V
			$I_O=-7.8mA; V_{CC}=6.0V$	5.48	5.81	-	V
LOW-level output voltage	V_{OL}	$V_I=V_{IH}$ or V_{IL}	$I_O=20\mu A; V_{CC}=2.0V$	-	0	0.1	V
			$I_O=20\mu A; V_{CC}=4.5V$	-	0	0.1	V
			$I_O=20\mu A; V_{CC}=6.0V$	-	0	0.1	V
			$I_O=6.0mA; V_{CC}=4.5V$	-	0.15	0.26	V
			$I_O=7.8mA; V_{CC}=6.0V$	-	0.16	0.26	V
input leakage current	I_I	$V_I=V_{CC}$ or $GND; V_{CC}=6.0V$		-	-	± 1	μA
OFF-state output current	I_{OZ}	$V_I=V_{IH}$ or $V_{IL}; V_{CC}=6.0V; V_O=V_{CC}$ or GND		-	-	± 0.5	μA
supply current	I_{CC}	$V_I=V_{CC}$ or $GND; I_O=0A; V_{CC}=6.0V$		-	-	8.0	μA
input apacitance	C_I	-		-	3.5	-	pF

DC Characteristics 2

(Tamb=-20°C to +85°C, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions		Min.	Typ.	Max.	Unit
HIGH-level input voltage	V_{IH}	$V_{CC}=2.0V$		1.5	-	-	V
		$V_{CC}=4.5V$		3.15	-	-	V
		$V_{CC}=6.0V$		4.2	-	-	V
LOW-level input voltage	V_{IL}	$V_{CC}=2.0V$		-	-	0.5	V
		$V_{CC}=4.5V$		-	-	1.35	V
		$V_{CC}=6.0V$		-	-	1.8	V
HIGH-level output voltage	V_{OH}	$V_I=V_{IH} \text{ or } V_{IL}$	$I_O=-20\mu A; V_{CC}=2.0V$	1.9	-	-	V
			$I_O=-20\mu A; V_{CC}=4.5V$	4.4	-	-	V
			$I_O=-20\mu A; V_{CC}=6.0V$	5.9	-	-	V
			$I_O=-6.0mA; V_{CC}=4.5V$	3.84	-	-	V
			$I_O=-7.8mA; V_{CC}=6.0V$	5.34	-	-	V
LOW-level output voltage	V_{OL}	$V_I=V_{IH} \text{ or } V_{IL}$	$I_O=20\mu A; V_{CC}=2.0V$	-	-	0.1	V
			$I_O=20\mu A; V_{CC}=4.5V$	-	-	0.1	V
			$I_O=20\mu A; V_{CC}=6.0V$	-	-	0.1	V
			$I_O=6.0mA; V_{CC}=4.5V$	-	-	0.33	V
			$I_O=7.8mA; V_{CC}=6.0V$	-	-	0.33	V
input leakage current	I_I	$V_I=V_{CC} \text{ or } GND; V_{CC}=6.0V$		-	-	± 1.0	μA
OFF-state output current	I_{OZ}	$V_I=V_{IH} \text{ or } V_{IL}; V_{CC}=6.0V; V_O=V_{CC} \text{ or } GND$		-	-	± 5.0	μA
supply current	I_{CC}	$V_I=V_{CC} \text{ or } GND; I_O=0A; V_{CC}=6.0V$		-	-	80	μA

AC Characteristics 1

(Tamb=25°C, voltages are referenced to GND(ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
nAn to nYn propagation delay	t _{pd}	see Figure5	V _{CC} =2.0V	-	30	100 ns
			V _{CC} =4.5V	-	11	20 ns
			V _{CC} =5.0V; C _L = 15pF	-	9	- ns
			V _{CC} =6.0V	-	9	17 ns
nOE to nYn enable time	t _{en}	see Figure6	V _{CC} =2.0V	-	39	150 ns
			V _{CC} =4.5V	-	14	30 ns
			V _{CC} =6.0V	-	11	26 ns
nOE to nYn disable time	t _{dis}	see Figure6	V _{CC} =2.0V	-	41	150 ns
			V _{CC} =4.5V	-	15	30 ns
			V _{CC} =6.0V	-	12	26 ns
transition time	t _t	see Figure5	V _{CC} =2.0V	-	14	60 ns
			V _{CC} =4.5V	-	5	12 ns
			V _{CC} =6.0V	-	4	10 ns
power dissipation capacitance	C _{PD}	per buffer; V _I =GND to V _{CC}	-	30	-	pF

Note:

[1] t_{pd} is the same as t_{PLH} and t_{PHL}.

[2] t_t is the same as t_{THL} and t_{TLH}.

[3] C_{PD} is used to determine the dynamic power dissipation (P_D in uW).

$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum (C_L \times V_{CC}^2 \times f_o)$ where:

f_i=input frequency in MHz;

f_o=output frequency in MHz;

C_L=output load capacitance in pF;

V_{CC}=supply voltage in V;

N=number of inputs switching;

$\sum (C_L \times V_{CC}^2 \times f_o)$ =sum of outputs.

AC Characteristics 2

(Tamb=-20°C to 85°C, voltages are referenced to GND(ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
nAn to nYn propagation delay	t_{pd}	see Figure5	$V_{CC}=2.0V$	-	-	125 ns
			$V_{CC}=4.5V$	-	-	25 ns
			$V_{CC}=6.0V$	-	-	21 ns
nOE to nYn enable time	t_{en}	see Figure6	$V_{CC}=2.0V$	-	-	190 ns
			$V_{CC}=4.5V$	-	-	38 ns
			$V_{CC}=6.0V$	-	-	33 ns
nOE to nYn disable time	t_{dis}	see Figure6	$V_{CC}=2.0V$	-	-	190 ns
			$V_{CC}=4.5V$	-	-	38 ns
			$V_{CC}=6.0V$	-	-	33 ns
transition time	t_t	see Figure5	$V_{CC}=2.0V$	-	-	75 ns
			$V_{CC}=4.5V$	-	-	15 ns
			$V_{CC}=6.0V$	-	-	13 ns

Note:

- [1] t_{pd} is the same as t_{PLH} and t_{PHL} .
- [2] t_{en} is the same as t_{PZL} and t_{PZH} .
- [3] t_{dis} is the same as t_{PLZ} and t_{PHZ} .
- [4] t_t is the same as t_{THL} and t_{TLH} .

Testing Circuit

AC Testing Circuit

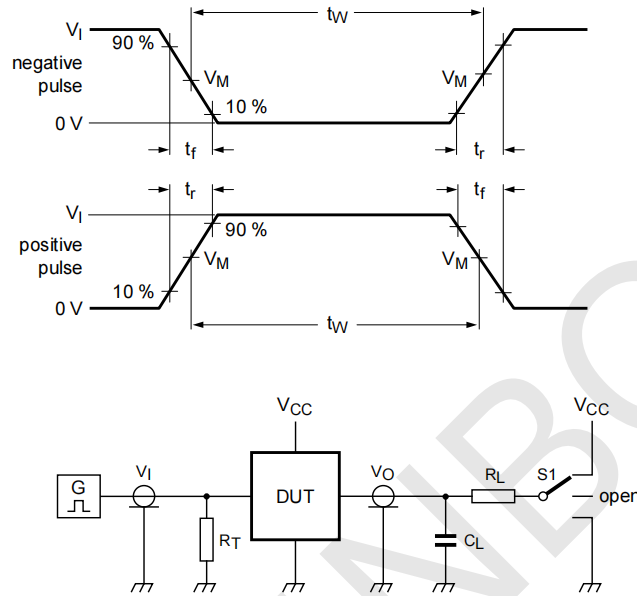


Figure 4. Test circuit for measuring switching times

Definitions for test circuit:

C_L =Load capacitance including jig and probe capacitance.

R_T =Termination resistance should be equal to the output impedance Z_o of the pulse generator.

R_L =Load resistance

S1=Test selection switch

AC Testing Waveforms

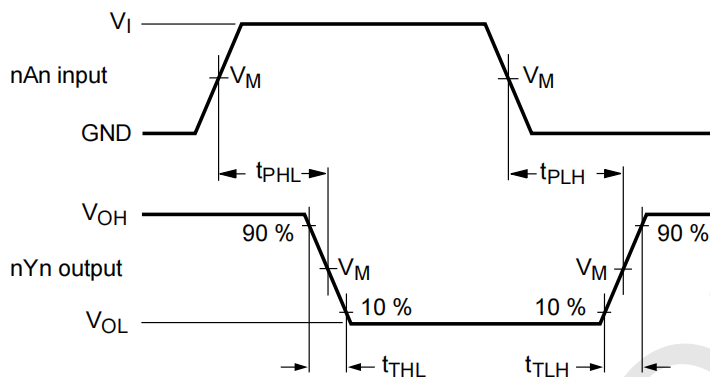


Figure 5. Input (nAn) to output (nYn) propagation delays and output transition times

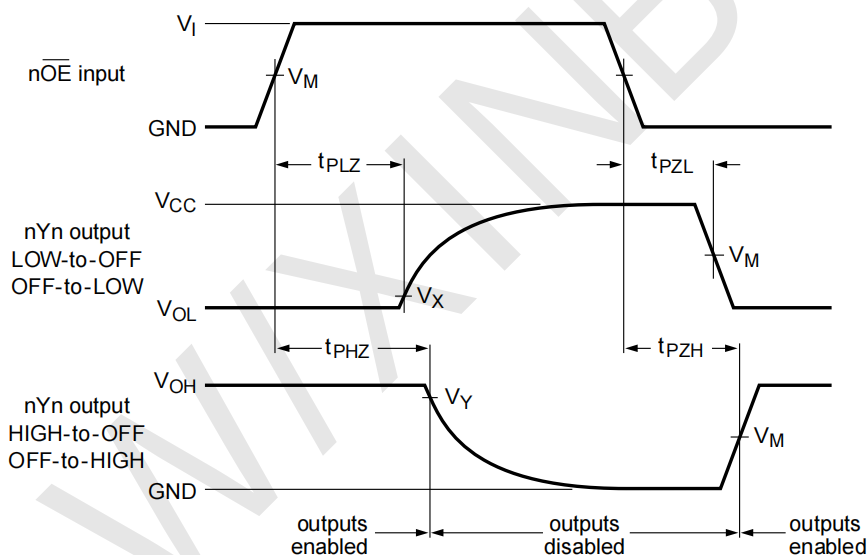


Figure 6. 3-state enable and disable times

Measurement Points

Type	Input	Output		
	V_M	V_M	V_M	V_Y
SN74LS240	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$	$0.1 \times V_{CC}$	$0.9 \times V_{CC}$




Test Data

Type	Input		Load		S1 position		
	V_I	t_r, t_f	C_L	R_L	t_{PHL}, t_{PLH}	t_{PZH}, t_{PHZ}	t_{PZL}, t_{PLZ}
SN74LS240	V_{CC}	6.0ns	15pF, 50pF	1K Ω	open	GND	V_{CC}

Package Information


· DIP-20

Size Symbol	Dimensions In Millimeters		Size Symbol	Dimensions In Inches	
	Min (mm)	Max (mm)		Min (in)	Max (in)
A	3.600	5.330	A	0.142	0.210
A1	0.510		A1	0.020	
A2	3.200	3.600	A2	0.126	0.142
B	0.360	0.530	B	0.014	0.021
B1	1.52 (BSC)		B1	0.060 (BSC)	
c	0.204	0.360	c	0.008	0.014
D	25.70	26.54	D	1.010	1.040
E1	6.200	6.750	E1	0.244	0.260
E2	7.620	9.300	E2	0.300	0.366
e	2.54 (BSC)		e	0.100 (BSC)	
L	3.000	3.600	L	0.118	0.142

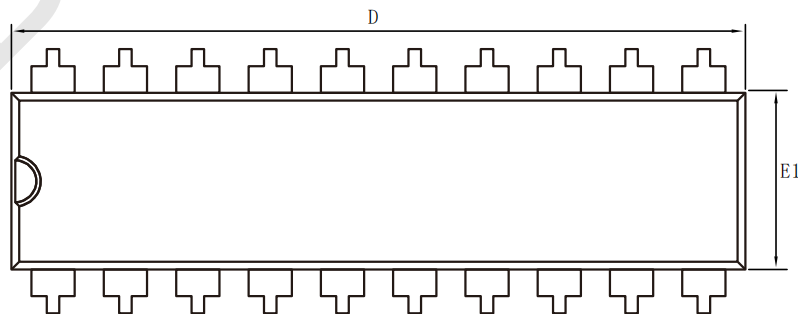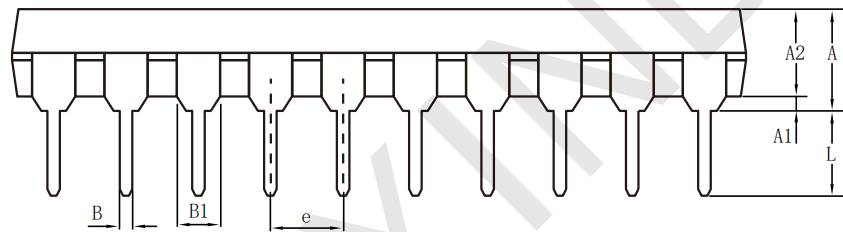



▪ SOP-20

Size Symbol	Dimensions In Millimeters		Size Symbol	Dimensions In Inches	
	Min(mm)	Max(mm)		Min(in)	Max(in)
A	2.470	2.650	A	0.097	0.104
A1	0.050	0.300	A1	0.002	0.012
A2	2.200	2.440	A2	0.087	0.096
b	0.350	0.500	b	0.014	0.020
c	0.150	0.300	c	0.006	0.012
D	12.54	12.94	D	0.494	0.509
E	10.00	10.60	E	0.394	0.417
E1	7.300	7.700	E1	0.287	0.303
e	1.270 (BSC)		e	0.050 (BSC)	
L	0.400	1.050	L	0.016	0.041
L1	1.300	1.500	L1	0.051	0.059
θ	0°	8°	θ	0°	8°

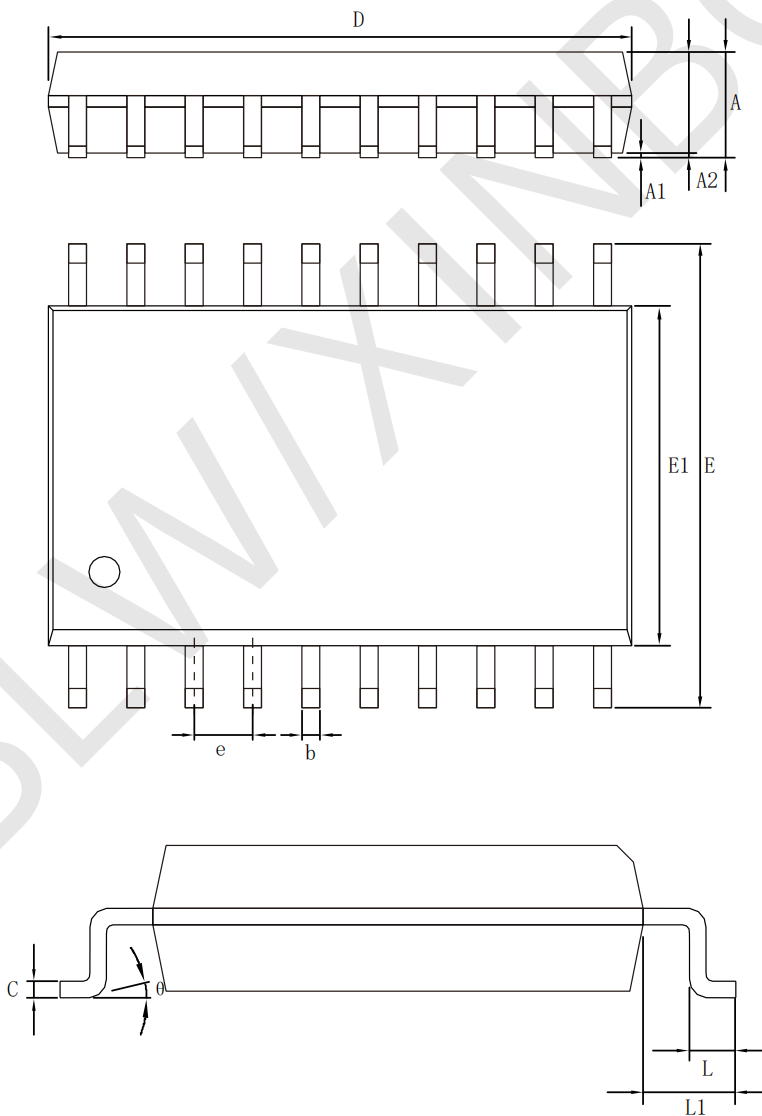

• TSSOP-20

Symbol	Size	Dimensions In Millimeters		Symbol	Size	Dimensions In Inches	
		Min(mm)	Max(mm)			Min(in)	Max(in)
D		6.400	6.600	D		0.252	0.259
E		4.300	4.500	E		0.169	0.177
b		0.190	0.300	b		0.007	0.012
c		0.090	0.200	c		0.004	0.008
E1		6.250	6.550	E1		0.246	0.258
A			1.200	A			0.047
A2		0.800	1.000	A2		0.031	0.039
A1		0.050	0.150	A1		0.002	0.006
e		0.65 (BSC)		e		0.026 (BSC)	
L		0.500	0.700	L		0.020	0.028
H		0.25 (TYP)		H		0.01 (TYP)	
θ		1°	7°	θ		1°	7°

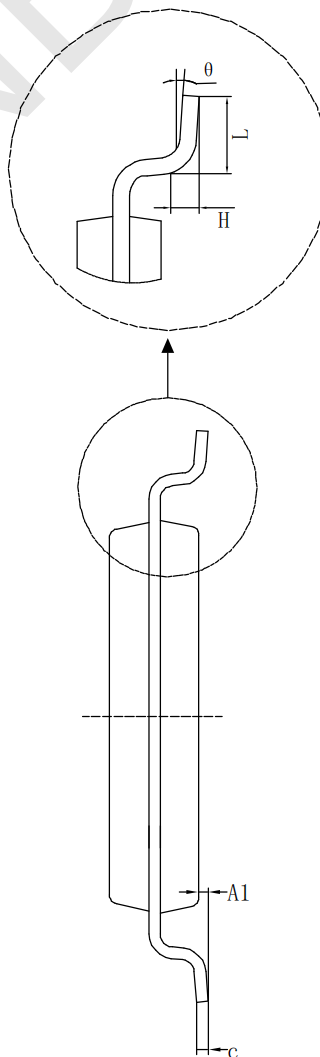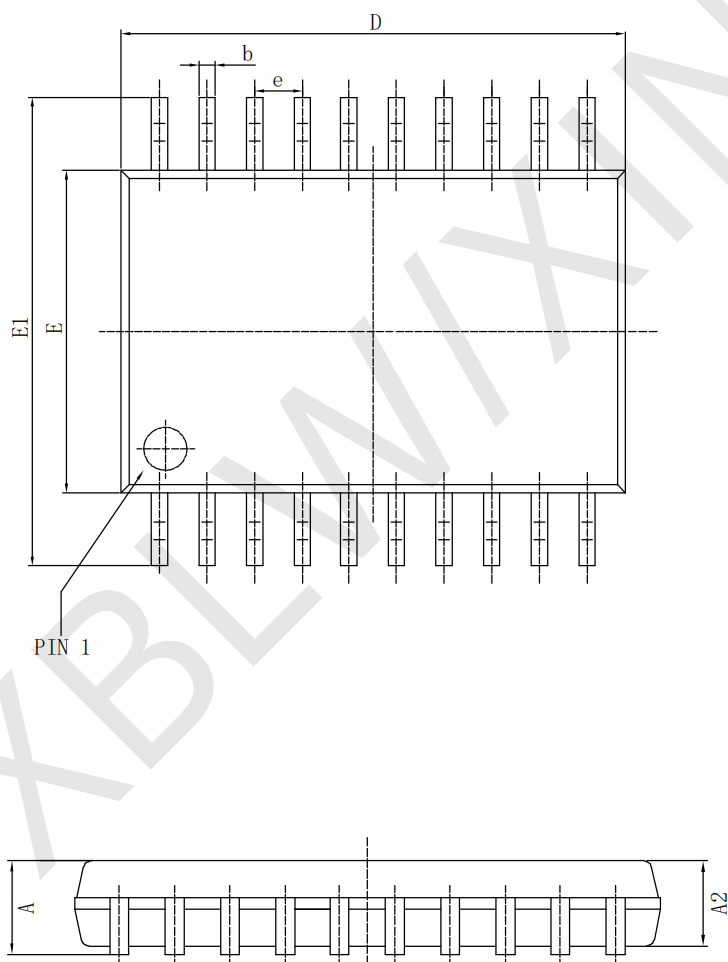

Statement

- XBLW reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using XBLW products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- XBLW product has not been licensed for life support, military and aerospace applications, and therefore XBLW is not responsible for any consequences arising from its use in these areas.
- If any or all XBLW products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all XBLW products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- XBLW documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. XBLW assumes no responsibility or liability for altered documents.
- XBLW is committed to becoming the preferred semiconductor brand for customers, and XBLW will strive to provide customers with better performance and better quality products.