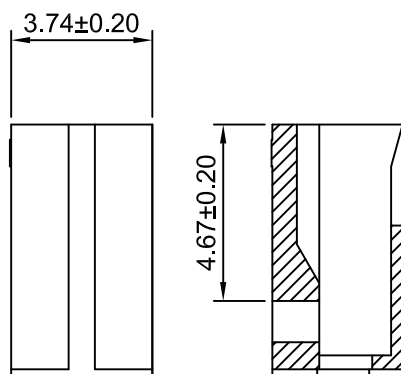
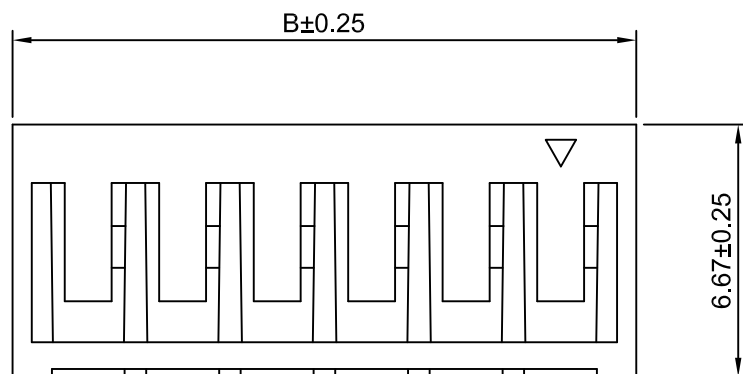

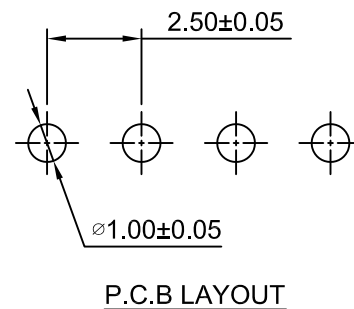
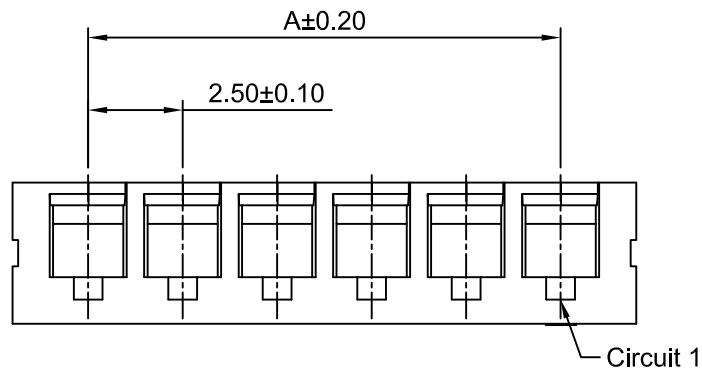


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	6.50	10P	22.50	26.50
3P	5.00	9.00	11P	25.00	29.00
4P	7.50	11.50	12P	27.50	31.50
5P	10.00	14.00	13P	30.00	34.00
6P	12.50	16.50	14P	32.50	36.50
7P	15.00	19.00	15P	35.00	39.00
8P	17.50	21.50	16P	37.50	41.50
9P	20.00	24.00			

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	Title : 2.50mm Pitch	
mm	5:1	1 of 1		
Draw By:		Approved :	Housing	
Diankui Wan		Jack Yin		
General Tolerance				
PROJECT				
x.x±0.25 x.xx±0.20 x.xxx±0.15			DRAW NO : B2513H-XP	
			REV A0	