



REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.03	阿树

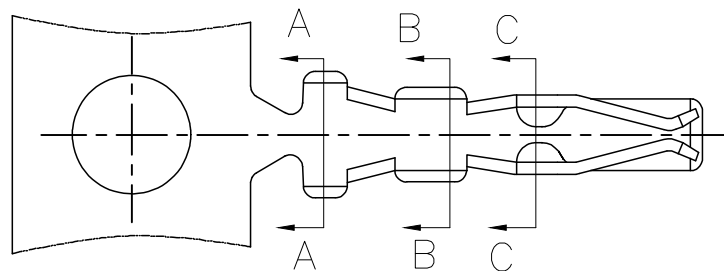

■ SPECIFICATIONS


- Voltage rating: 150V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 500V AC/minute
- Temperature range: -40°C ~ +125°C
- Insulation resistance: $\geq 500M\Omega$
- Contact resistance: $\leq 30m\Omega$

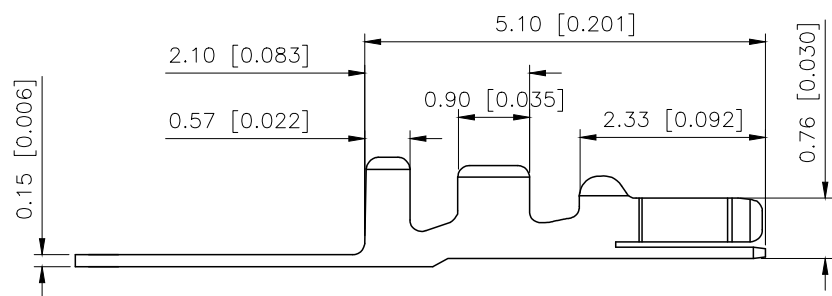


PART NO.:

X1255 T-P SN
① ② ③ ④


- ① Series No
- ② Category: T-Terminal
- ③ Material: P-Phosphor bronze
- ④ Plating style: V01-Gold Flash; SN-Bright tin plating



SECTION: C-C

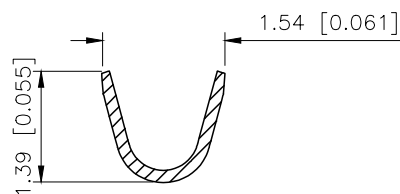

SECTION: A-A



SECTION: B-B

X1255T-PV01	Phospho Bronze	AWG#28-32	0.90mm(Max)	Stamping Before Plating: 30u" Ni; Whole Gold: Gold Flash	X1255H
X1255T-PSN				Stamping Before Plating: 30u" Ni; 70u" Sn Min	
PART No	Material	Wire Range	Insulation O.D.	Finish	Suitable XKB

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	1.25mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.:	X1255T-PV01
APPROVED		SIZE:	A4	DWG NO.:	