
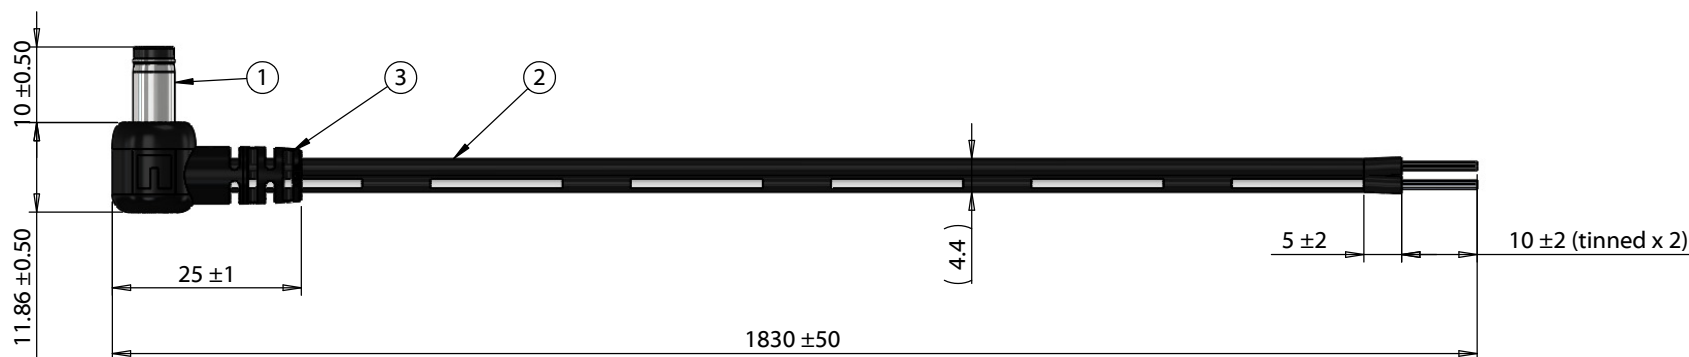


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00133	Connector, dc plug, 5.5x2.1x18.5 mm, molding style, spring contacts	1	
2	30-00007	Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A	1	
3	24-00006	Overmold, PVC, black	1	

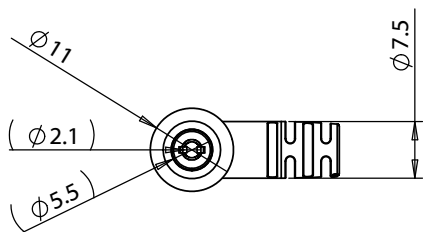

Wiring Diagram	
50-00133	Wire Color
Center	Black with stripe
Sleeve	Black

Notes:
Functionally equivalent components may be substituted
Cable rated for 48 V, 8.5 A

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY <small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small>
A	6/28/2012	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Cable, 1830 mm, 5.5x2.1x10 mm 90° 50-00133 dc plug to stripped tinned, 18 AWG, 30-00007 wire	A 10-01065
					Scale: 1:1 Sheet 1 of 1

5

4

3

2

1