




REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.19	阿树

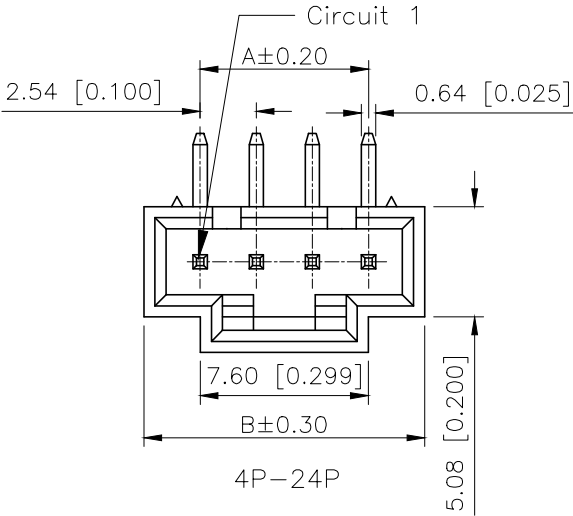

2P



3P


■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:1500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 20m\Omega$
- After environmental testing: $\leq 30m\Omega$


PART NO.:

X9556 W R-XX-N0 V01 XX
① ② ③ ④ ⑤ ⑥ ⑦


- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Stright 90°
④Row No.Pin No:XX-02~24Pin
⑤Material:N0-PA66 UL94V-0
⑥Planting: V**:All Gold-Plated
*01-1u"; *02-2u";
*03-3u"; *05-5u" *10-10u";
*15-15u";*30-30u";*50-50u"
SN-Bright tin plating 70U"
SN1-Bright tin plating 120U"Min.;
SW-Fog Tin plating
⑦Color: Blank-Natural Color

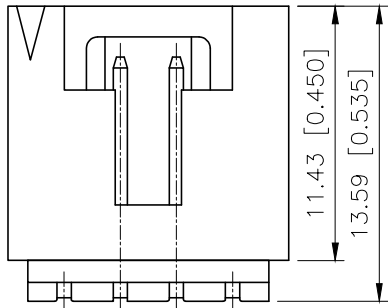


4P-24P




2P



3P

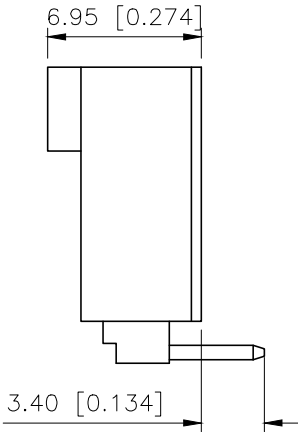

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.54	7.62	14	33.02	38.10
03	5.08	10.16	15	35.56	40.64
04	7.62	12.70	16	38.10	43.18
05	10.16	15.24	17	40.64	45.72
06	12.70	17.78	18	43.18	48.26
07	15.24	20.32	19	45.72	50.80
08	17.78	22.86	20	48.26	53.34
09	20.32	25.40	21	50.80	55.88
10	22.86	27.94	22	53.34	58.42
11	25.40	30.48	23	55.88	60.96
12	27.94	33.02	24	58.42	63.50
13	30.48	35.56			

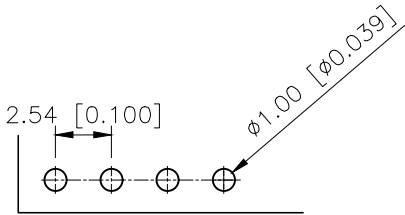

PCB LAYOUT

X9556WR-XX-NOV01	Nylon 66;UL 94V-0 BLACK	Brass	Gold-Flash	X9556H
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With XKB Terminal

AuGLAR	$\pm 5^\circ$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.54mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.: X9556WR-XX-NOV01
APPROVED		SIZE:	A4	DWG NO.: