

Product Area Female socket with wires, 0,25 mm<sup>2</sup>  
M12 connectors A-Coding


serie 713/763

Pole 4  
Article number 09 3432 00 04

### illustration




### scale drawing




Ausführung mit Zink Druckgussgehäuse  
Version with zinc diecasted housing

### Contact Arrangement



1 braun  
2 weiß  
3 blau  
4 schwarz

### Installation instructions / Mounting cutout

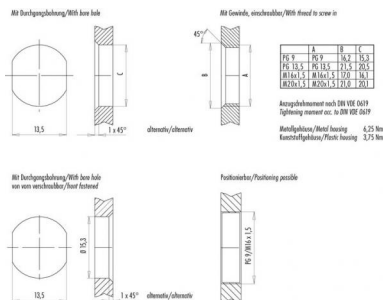

### Technical data

#### Common values

Connector Design	Female socket
Connector locking system	Screw-locking
Termination	wires
Wire gauge (mm)	0,25 mm <sup>2</sup>
Wire gauge (AWG)	24
Upper temperature	+85 °C
Lower temperature	-25 °C

#### Material

Material of contact	CuSn (bronze)
Contact plating	Au (gold)
Material of contact body	PA
Material of housing	zinc diecasting, nickel plated

#### Cable data

Contacts 4: Female socket with wires, 0,25 mm<sup>2</sup>, PG 9

#### Electrical values

Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40 °C)	4 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 68
Mechanical operation	>100 mating cycles