
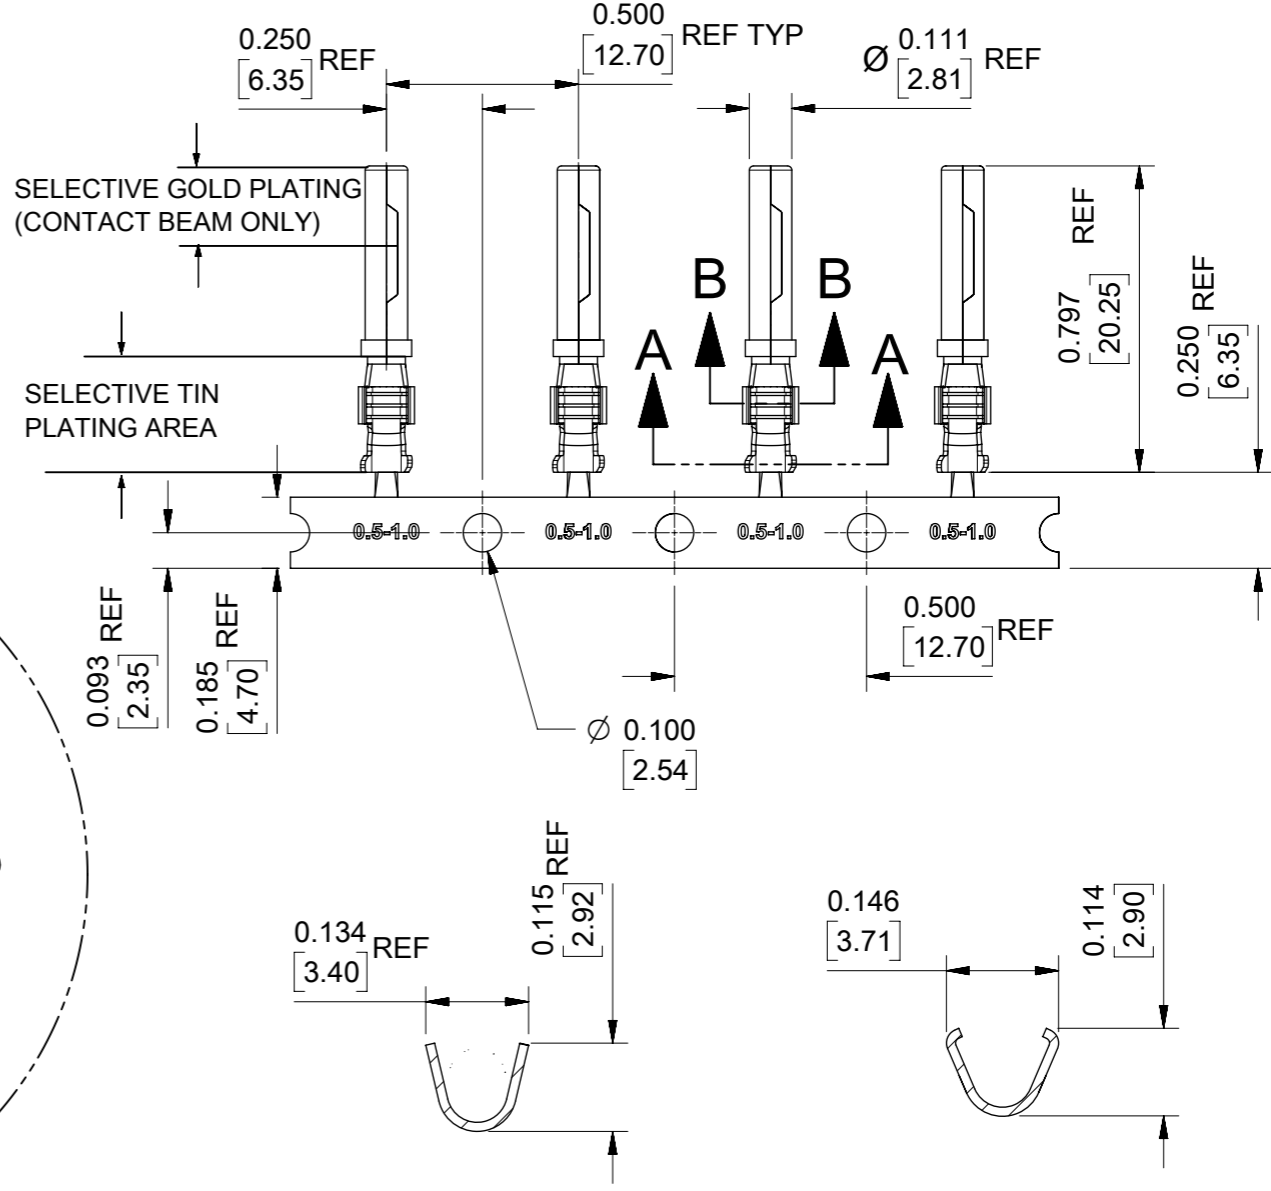


STRIP MATERIAL NUMBER	FINISH
84525-0053	SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 80μ INCH MINIMUM OVERALL
84525-0057	SELECTIVE HARD GOLD 30μ INCH MINIMUM WITH SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 50μ INCH MINIMUM OVERALL

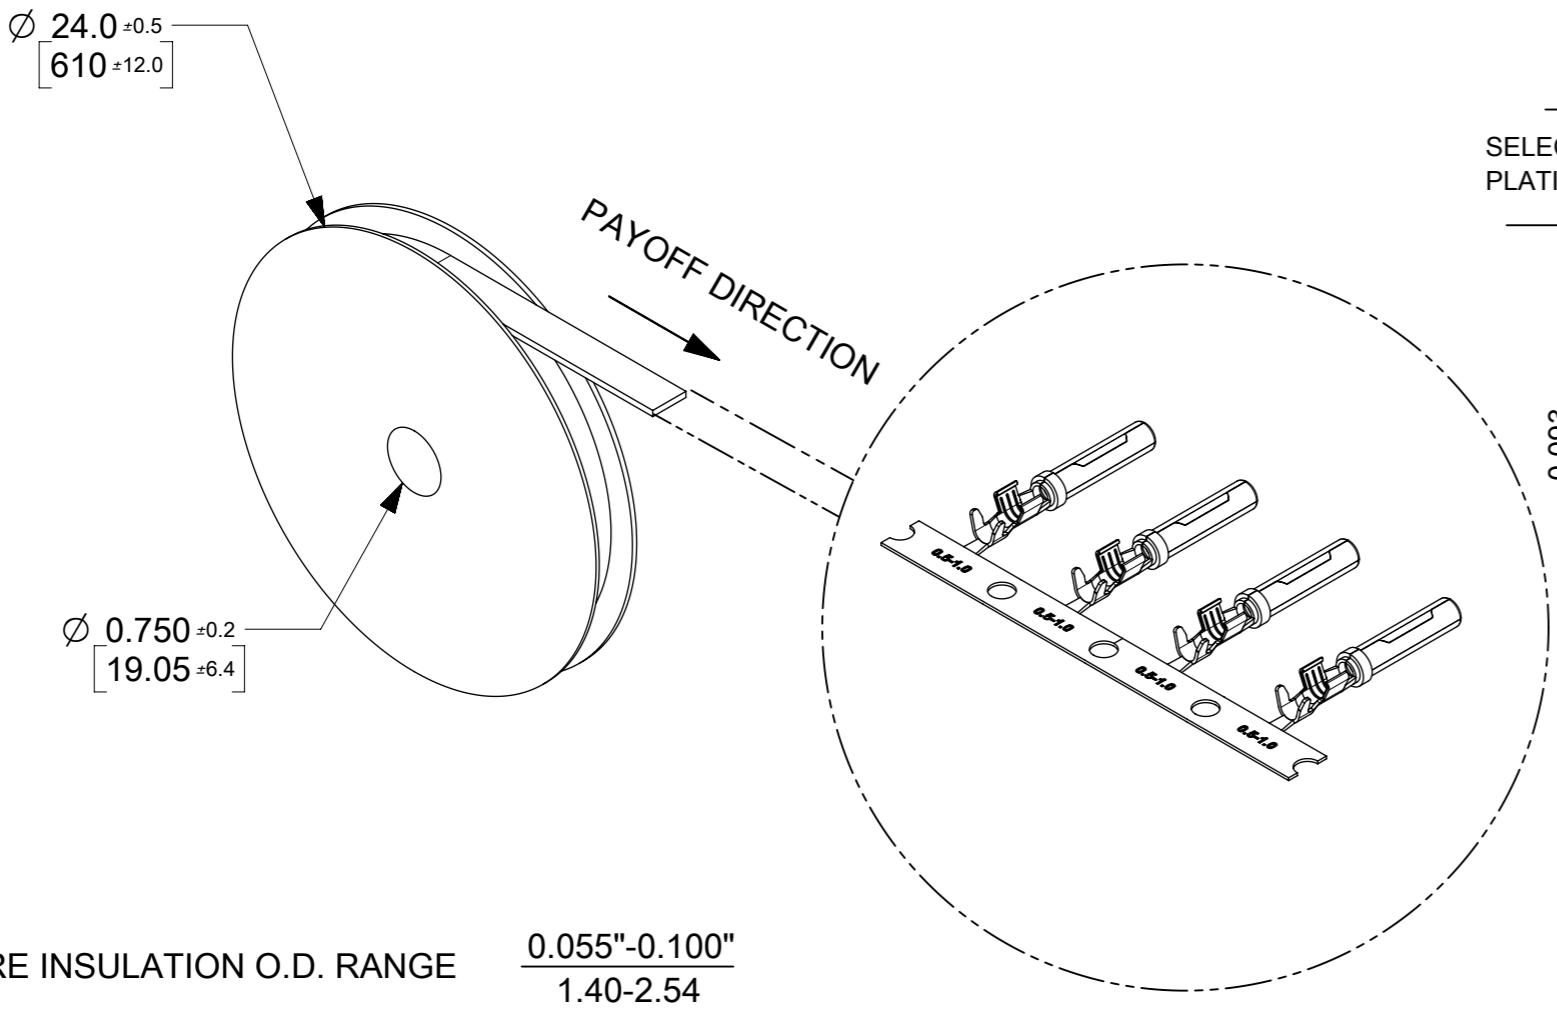

SECTION A-A  
INSULATION CRIMP

SECTION B-B  
CONDUCTOR CRIMP

- NOTES:
1. TERMINAL MATERIAL: COPPER ALLOY, .0118/0.300 THICK.  
FINISH: SEE CHART.
  2. HOOD MATERIAL: STAINLESS STEEL, .006/0.15 THICK.
  3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
  4. TERMINAL FOR USE WITH SERIES XRC & ML-XT CONNECTOR ASSEMBLIES.

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: SEE LONG TEXT			<b>molex</b>		
	DIMENSION UNITS	SCALE	EC NO: 168799					
▽ = 0	INCH/[mm]	2:1	DRWN: JFLETCHER 2017/11/21			XRC SOCKET TERMINAL W/SNAP WINDOW 16-20AWG (0.5-1.0MM <sup>2</sup> ) 0.055"-0.100" WIRE Ø		
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: JDWALLACE 2018/02/12			PRODUCT CUSTOMER DRAWING		
▽ = 0	ANGULAR TOL ± 2.0°		APPR: JDWALLACE 2018/02/20			DOCUMENT NUMBER		
▽ = 0	4 PLACES ±		INITIAL REVISION:			845250050		
▽ = 0	3 PLACES ±		DRWN: JFLETCHER 2016/01/20			DOC TYPE DOC PART REVISION		
▽ = 0	2 PLACES ± 0.13		APPR: JALEXANDER 2016/01/29			PSD 000 B		
▽ = 0	1 PLACE ± 0.2		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NUMBER		
▽ = 0	0 PLACES ±		THIRD ANGLE PROJECTION			CUSTOMER		
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRAWING		SERIES	SHEET NUMBER		
▽ = 0			A3-SIZE		84525	SEE CHART		GENERAL MARKET
▽ = 0						1 OF 1		