

SLP65R170E7 / SLF65R170E7




650V N-Channel MOSFET

General Description

This Power MOSFET is produced using Maple semi's advanced trench MOSFET technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency switched mode power supplies.

Features

- 22A, 650V, $R_{DS(on)} = 170\text{m}\Omega @ V_{GS} = 10\text{ V}$
- Low gate charge(typ. $Q_g = 30.2\text{nC}$)
- High ruggedness Ultra
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability



Absolute Maximum Ratings

$T_c = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	SLP65R170E7 / SLF65R170E7	Units
V_{DSS}	Drain-Source Voltage	650	V
I_D	Drain Current - Continuous ($T_c = 25^\circ\text{C}$)	22 *	A
	- Continuous ($T_c = 100^\circ\text{C}$)	12*	A
I_{DM}	Drain Current - Pulsed	(Note 1)	A
V_{GSS}	Gate-Source Voltage	± 30	V
EAS	Single Pulsed Avalanche Energy	(Note 2)	mJ
I_{AR}	Avalanche Current	(Note 1)	A
E _{AR}	Repetitive Avalanche Energy	(Note 1)	mJ
dv/dt	Peak Diode Recovery dv/dt	(Note 3)	20
	MOSFET dv/dt		100
P_D	Power Dissipation ($T_c = 25^\circ\text{C}$)	36	W
	- Derate above 25°C	0.29	W/ $^\circ\text{C}$
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to +150	$^\circ\text{C}$
T_L	Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds	260	$^\circ\text{C}$

* Drain current limited by maximum junction temperature.

Thermal Characteristics

Symbol	Parameter	SLP65R170E7 / SLF65R170E7	Units
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	3.5	$^\circ\text{C/W}$
$R_{\theta JS}$	Thermal Resistance, Case-to-Sink Typ.	-	$^\circ\text{C/W}$
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	62.5	$^\circ\text{C/W}$

Electrical Characteristics

$T_c = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
--------	-----------	-----------------	-----	-----	-----	-------

Off Characteristics

BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}} = 0 \text{ V}, I_{\text{D}} = 1 \text{ mA}$	650	--	--	V
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}} = 0 \text{ V}, I_{\text{D}} = 1 \text{ mA}, T_J = 150^\circ\text{C}$	650	--	--	V
$I_{\text{DS}}^{\text{off}}$	Zero Gate Voltage Drain Current	$V_{\text{DS}} = 650 \text{ V}, V_{\text{GS}} = 0 \text{ V}$	--	--	1	uA
		$V_{\text{DS}} = 480 \text{ V}, T_c = 125^\circ\text{C}$	--	2	--	uA
I_{GSSF}	Gate-Body Leakage Current, Forward	$V_{\text{GS}} = 30 \text{ V}, V_{\text{DS}} = 0 \text{ V}$	--	--	100	nA
I_{GSSR}	Gate-Body Leakage Current, Reverse	$V_{\text{GS}} = -30 \text{ V}, V_{\text{DS}} = 0 \text{ V}$	--	--	-100	nA

On Characteristics

$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}} = V_{\text{GS}}, I_{\text{D}} = 1.7 \text{ mA}$	2.5	--	4.5	V
$R_{\text{DS}(\text{on})}$	Static Drain-Source On-Resistance	$V_{\text{GS}} = 10 \text{ V}, I_{\text{D}} = 10 \text{ A}$	--	150	170	$\text{m}\Omega$

Dynamic Characteristics

C_{iss}	Input Capacitance	$V_{\text{DS}} = 400 \text{ V}, V_{\text{GS}} = 0 \text{ V}, f = 250 \text{ KHz}$	--	1240	--	pF
C_{oss}	Output Capacitance		--	34	--	pF
C_{rss}	Reverse Transfer Capacitance		--	--	--	pF

Switching Characteristics

$t_{\text{d}(\text{on})}$	Turn-On Delay Time	$V_{\text{DS}} = 400 \text{ V}, I_{\text{D}} = 10 \text{ A}, R_{\text{G}} = 10 \Omega, V_{\text{GS}} = 10 \text{ V}$ (Note 4, 5)	--	12	--	ns
t_r	Turn-On Rise Time		--	8	--	ns
$t_{\text{d}(\text{off})}$	Turn-Off Delay Time		--	53	--	ns
t_f	Turn-Off Fall Time		--	10	--	ns
Q_g	Total Gate Charge	$V_{\text{DS}} = 400 \text{ V}, I_{\text{D}} = 10 \text{ A}, V_{\text{GS}} = 10 \text{ V}$ (Note 4, 5)	--	30.2	--	nC
Q_{gs}	Gate-Source Charge		--	5.8	--	nC
Q_{gd}	Gate-Drain Charge		--	15.4	--	nC
R_{G}	Gate Resistance	$f = 1 \text{ MHz}$		1.3		Ω

Drain-Source Diode Characteristics and Maximum Ratings

I_s	Maximum Continuous Drain-Source Diode Forward Current	--	--	22	A	
I_{SM}	Maximum Pulsed Drain-Source Diode Forward Current	--	--	57	A	
V_{SD}	Drain-Source Diode Forward Voltage	$V_{\text{GS}} = 0 \text{ V}, I_s = 10 \text{ A}$	--	--	1.2	V
t_{rr}	Reverse Recovery Time	$V_{\text{DD}} = 400 \text{ V}, I_s = 10 \text{ A}, dI_f / dt = 100 \text{ A/us}$ (Note 4)	--	274	--	ns
Q_{rr}	Reverse Recovery Charge		--	3.33	--	μC

Notes:

- Repetitive Rating : Pulse width limited by maximum junction temperature
- $L = 79 \text{ mH}$ $I_{\text{AS}} = I_{\text{D}}$, $V_{\text{DD}} = 50 \text{ V}$, $R_{\text{G}} = 25 \Omega$, Starting $T_J = 25^\circ\text{C}$
- $I_{\text{SD}} \leq I_{\text{D}}$ $dI/dt \leq 200 \text{ A/us}$, $V_{\text{DD}} \leq 400$, Starting $T_J = 25^\circ\text{C}$
- Pulse Test : Pulse width $\leq 300 \mu\text{s}$, Duty cycle $\leq 2\%$
- Essentially independent of operating temperature

Typical Characteristics

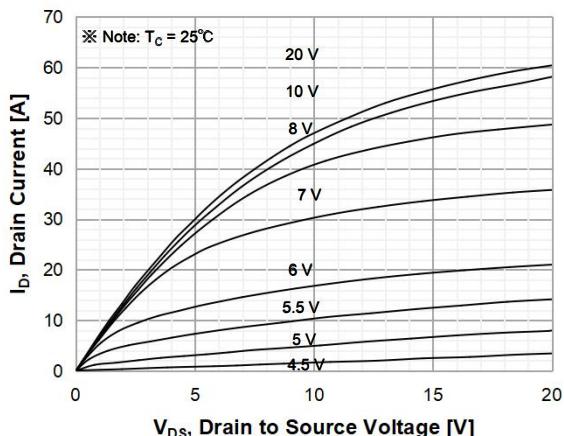


Figure 1. On-Region Characteristics

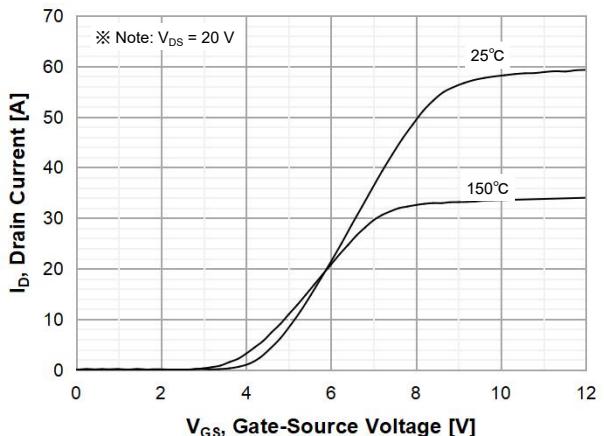


Figure 2. Transfer Characteristics

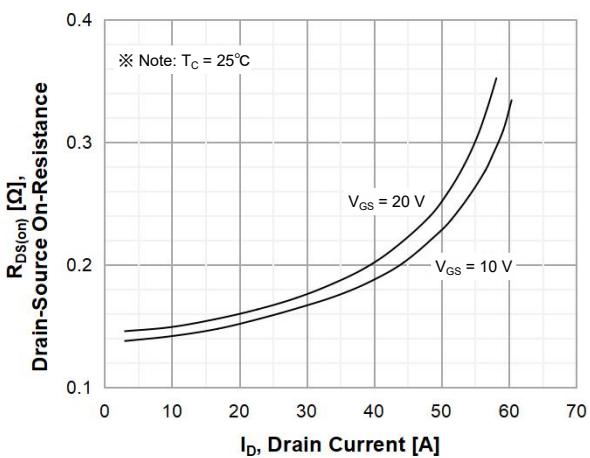


Figure 3. On-Resistance Variation vs. Drain Current and Gate Voltage

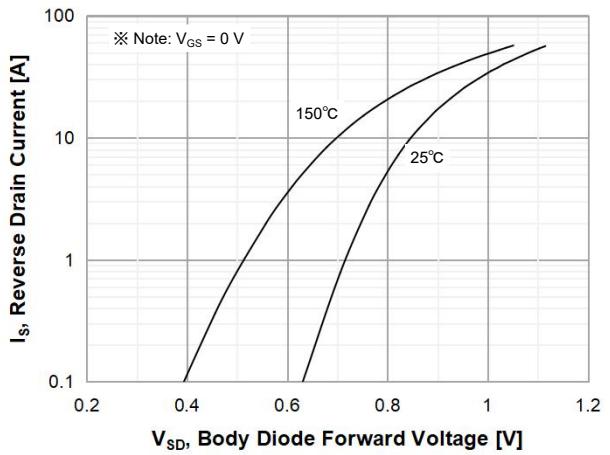


Figure 4. Body Diode Forward Voltage Variation with Source Current and Temperature

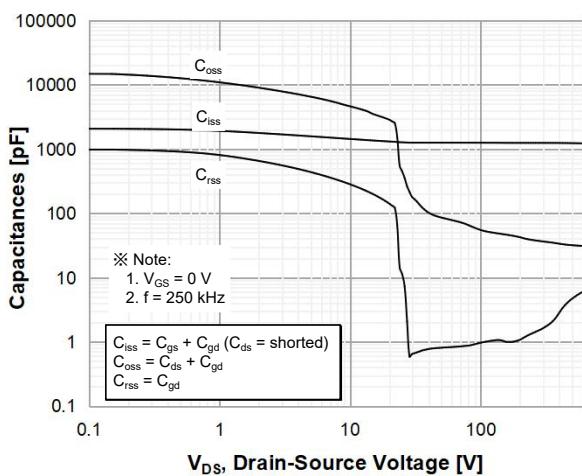


Figure 5. Capacitance Characteristics

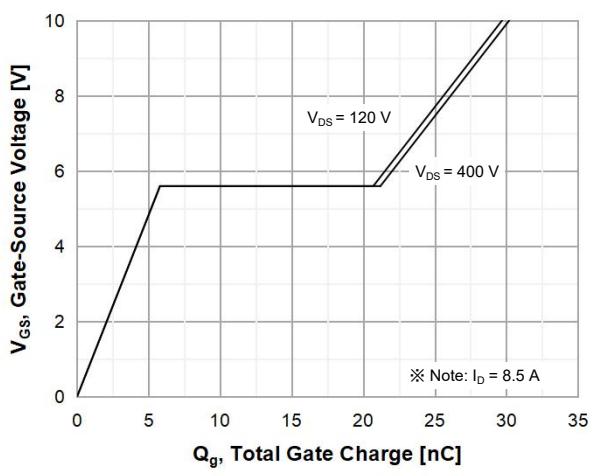


Figure 6. Gate Charge Characteristics

Typical Characteristics (Continued)

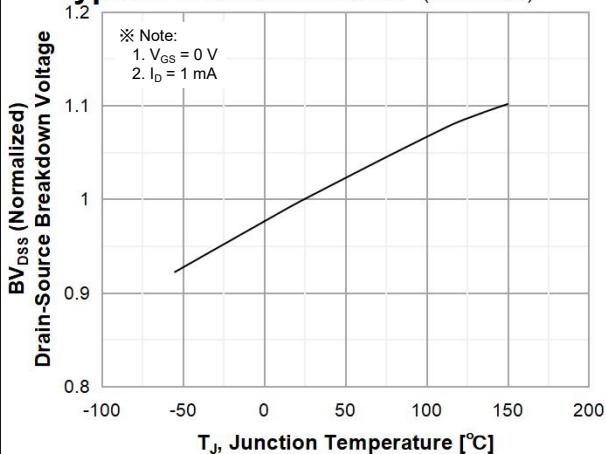


Figure 7. Breakdown Voltage Variation
vs Temperature

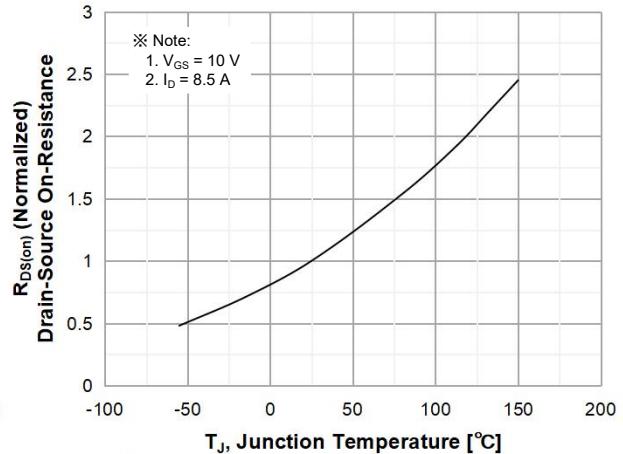


Figure 8. On-Resistance Variation
vs Temperature

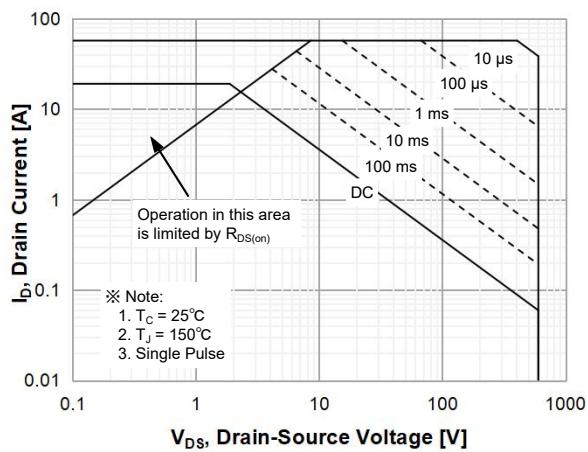


Figure 9. Maximum Safe Operating Area

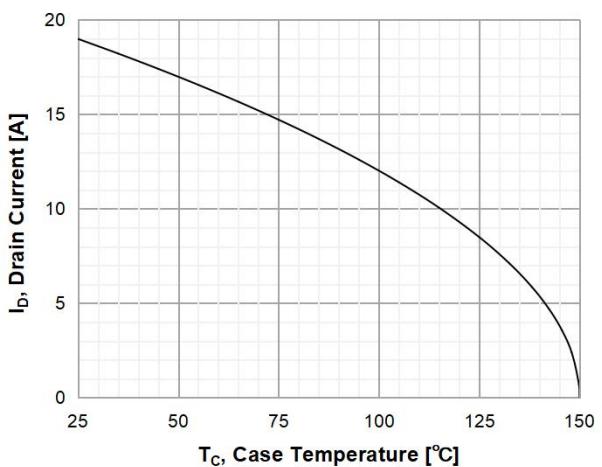


Figure 10. Maximum Drain Current vs.
Case Temperature

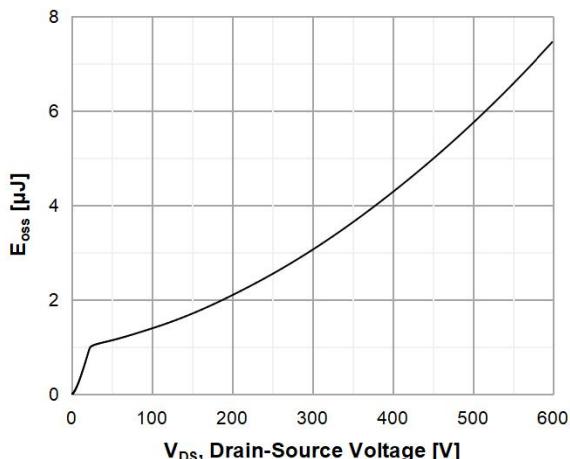


Figure 11. E_{oss} vs. Drain to Source Voltage



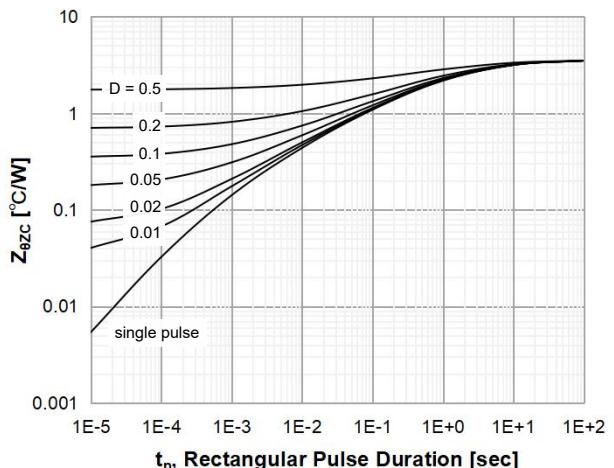


Figure 12. Transient Thermal Response Curve


Gate Charge Test Circuit & Waveform

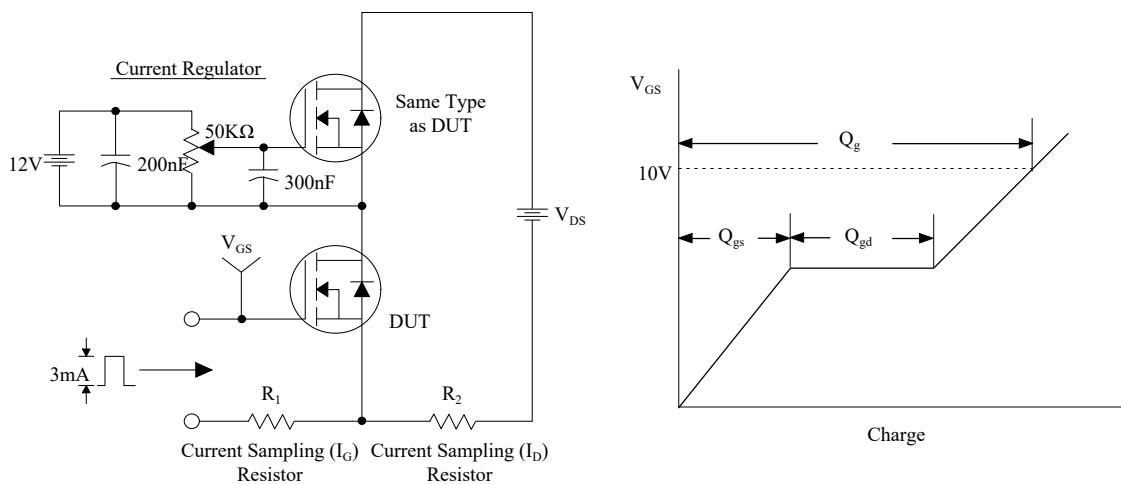

Resistive Switching Test Circuit & Waveforms

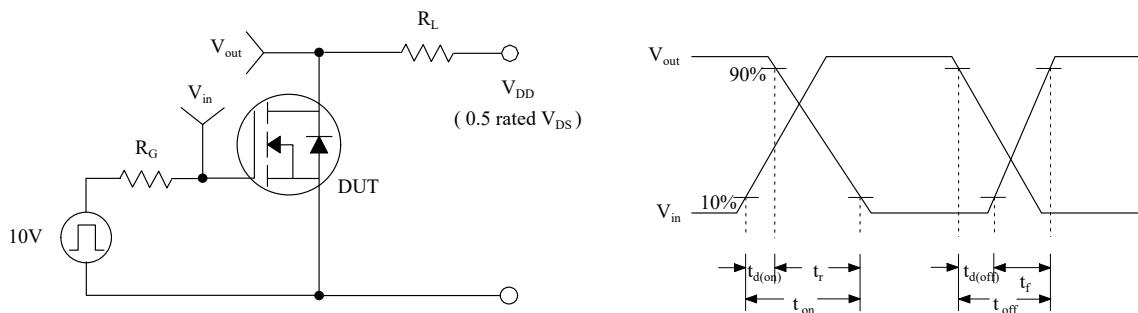

Unclamped Inductive Switching Test Circuit & Waveforms

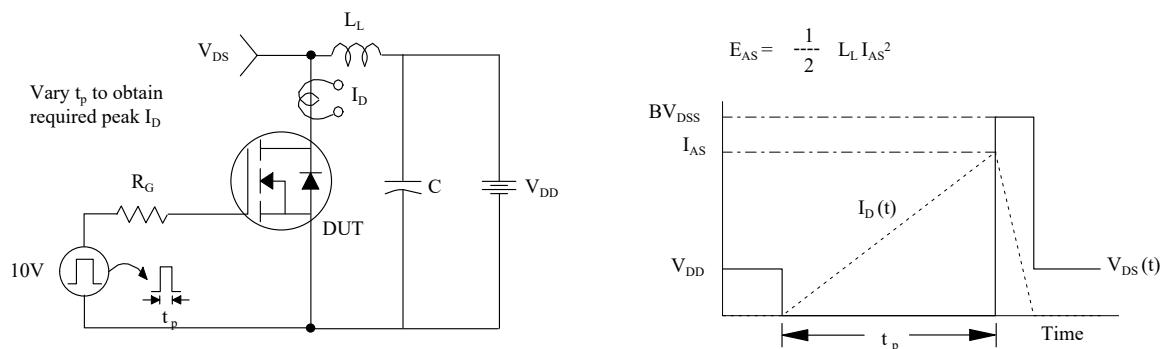

Peak Diode Recovery dv/dt Test Circuit & Waveforms

