

# Product data sheet

Specifications



Annunciator, Harmony XB5,  
Illuminated buzzer, plastic, red,  
22mm, continuous or intermittent  
tone, 24V AC DC

XB5KS2B4

Product availability: Stock - Normally stocked in distribution facility

Price\*: 65.00 USD

## Main

Range of Product	Harmony XB5
Product or Component Type	Annunciator
Bezel material	Plastic
Mounting diameter	0.9 in (22 mm)
Cap/operator or lens colour	Red

## Complementary

Supply circuit type	AC/DC
Supply frequency	50/60 Hz
Signalling type	Continuous or intermittent tone
Noise level	90 dB 6.8 kHz 0.1 m +/- 10 %
Resistance to high pressure washer	1305.3 psi (9000000 Pa) 176 °F (80 °C) 0.1 m
Height	1.1 in (29 mm)
Width	1.1 in (29 mm)
Depth	2.2 in (55 mm)
Net Weight	0.053 lb(US) (0.024 kg)
Current Consumption	<= 58 mA
[Us] rated supply voltage	24 V +/- 10 %

## Environment

protective treatment	TH
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-40...158 °F (-40...70 °C)
Overvoltage category	Class II IEC 60536
NEMA Degree of Protection	NEMA 4X NEMA 13

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Standards</b>	CSA C22.2 No 14 IEC 60947-5-1 IEC 60947-5-4 JIS C8201-5-1 IEC 60947-1 UL 508 IEC 60947-5-4 IEC 60947-5-1 IEC 60947-1 JIS C8201-1 IEC 60529 IEC 62262 IEC 50102
<b>Product Certifications</b>	UL Listed CSA BV

## Ordering and shipping details

<b>Category</b>	US10CS200028
<b>Discount Schedule</b>	0CS2
<b>GTIN</b>	3606481352439
<b>Returnability</b>	Yes
<b>Country of origin</b>	US

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Height</b>	1.3 in (3.3 cm)
<b>Package 1 Width</b>	1.3 in (3.4 cm)
<b>Package 1 Length</b>	2.4 in (6 cm)
<b>Package 1 Weight</b>	1.0 oz (27 g)
<b>Unit Type of Package 2</b>	S01
<b>Number of Units in Package 2</b>	88
<b>Package 2 Height</b>	5.9 in (15 cm)
<b>Package 2 Width</b>	5.9 in (15 cm)
<b>Package 2 Length</b>	15.7 in (40 cm)
<b>Package 2 Weight</b>	5.796 lb(US) (2.629 kg)
<b>Unit Type of Package 3</b>	P06
<b>Number of Units in Package 3</b>	1408
<b>Package 3 Height</b>	27.6 in (70 cm)
<b>Package 3 Width</b>	31.5 in (80 cm)
<b>Package 3 Length</b>	23.6 in (60 cm)
<b>Package 3 Weight</b>	94.834 lb(US) (43.016 kg)

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Well-being performance

Mercury Free

Rohs Exemption Information Yes


## Certifications & Standards

Reach Regulation	<a href="#">REACH Declaration</a>
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	No need of specific recycling operations
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

Dimensions Drawings

Dimensions

---

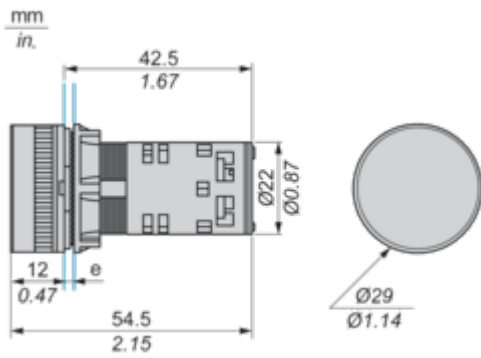


e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

**Panel Cut-out for Buzzer**

---

**Connection by Screw Clamp Terminals**

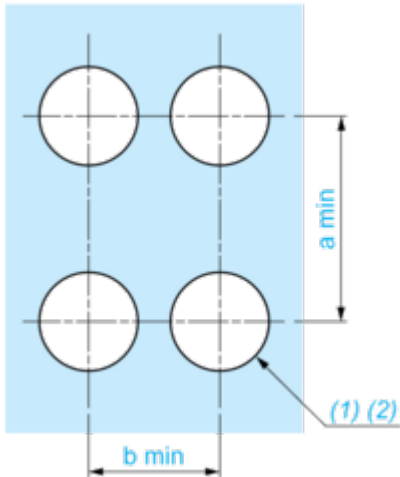

(1) Diameter on finished panel or support


(2)  $\varnothing 22.5$  mm recommended ( $\varnothing 22.3 \begin{smallmatrix} +0.4 \\ 0 \end{smallmatrix}$ ) /  $\varnothing 0.89$  in. recommended ( $\varnothing 0.88$  in.  $\begin{smallmatrix} +0.016 \\ 0 \end{smallmatrix}$ )

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18

Connections and Schema

Cabling of Annunciators

---

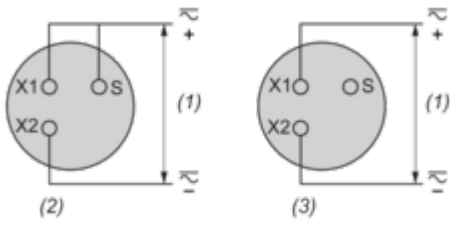

- (1) Supply
- (2) Intermittent
- (3) Continuous