

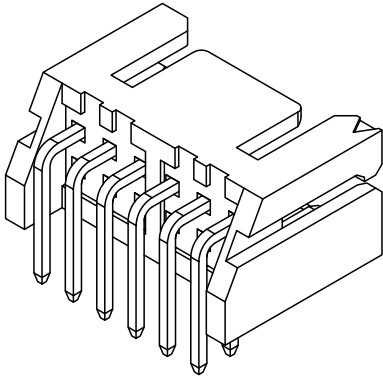
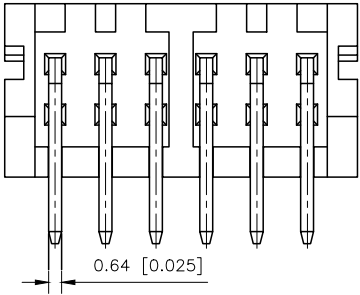


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE		
A1	N/A		图面升级整理图面	2024.08.24	阿树

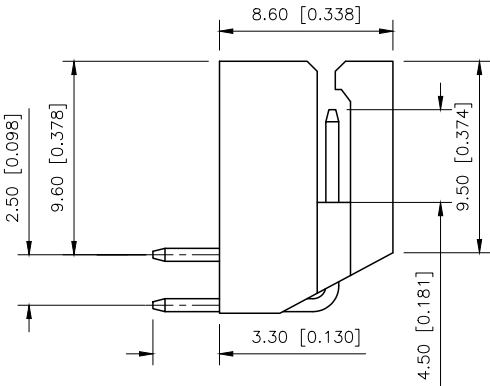

- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:800V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤10mΩ
 - After environmental testing: ≤20mΩ

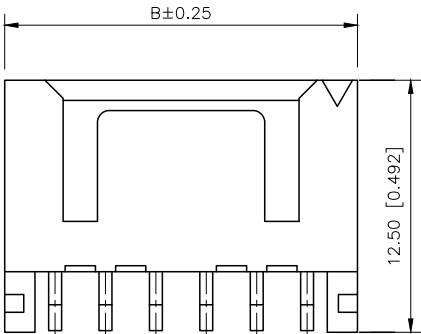

PART NO.:
X8826 W R-2XXX N0 XX
① ② ③ ④ ⑤ ⑥

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Angle:R-Sright 90°
- 4.Row No.Pin No:2xXX-2x02~2x20Pin
- 5.Material:N0-PA66 UL94V-0
- 6.Plating:SN-Bright Tin Plated

Poles	Dimensions(mm)	
	A	B
2x02	2.50	7.50
2x03	5.00	10.00
2x04	7.50	12.50
2x05	10.00	15.00
2x06	12.50	17.50
2x07	15.00	20.00
2x08	17.50	22.50
2x09	20.00	25.00
2x10	22.50	27.50
2x11	25.00	30.00
2x12	27.50	32.50
2x13	30.00	35.00
2x14	32.50	37.50