

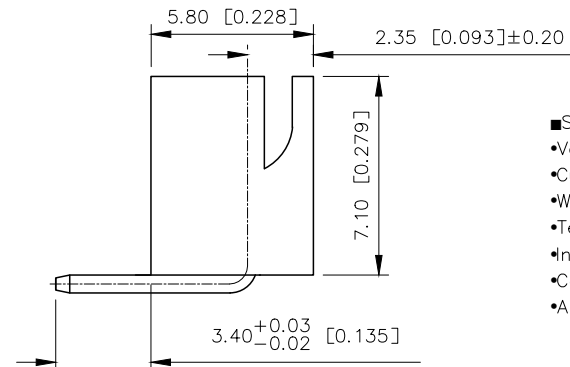
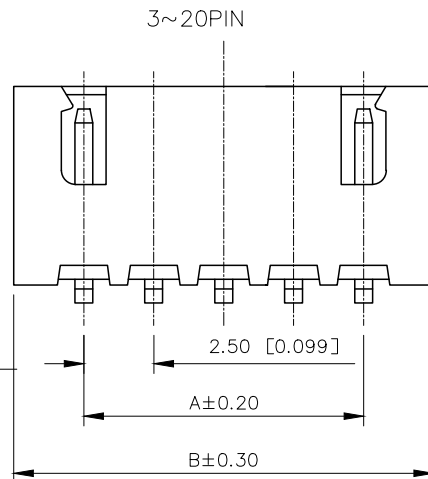
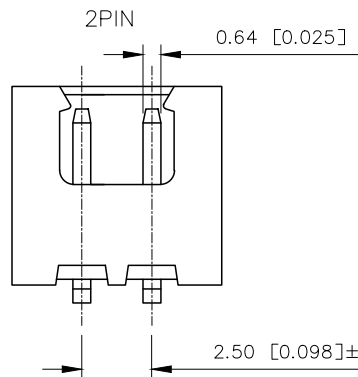
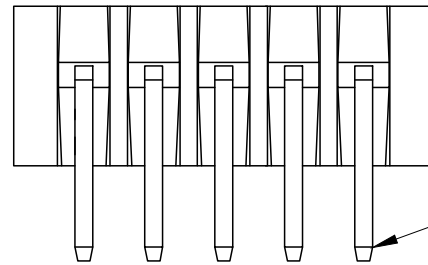


	REVISIONS				
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		pin针尺寸变更, 图面升级整理图面	2024.12.12	阿树

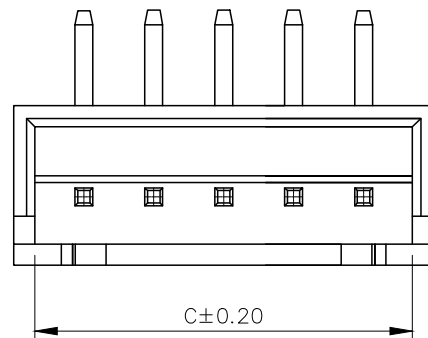

- SPECIFICATIONS
- Voltage rating: 250V AC/DC
 - Current rating: 3A AC/DC
 - Withstanding Voltage: 1000V AC/minute
 - Temperature range: -45°C+ 125°C
 - Insulation resistance: $\geq 1000\text{M}\Omega$
 - Contact resistance: $\leq 10\text{m}\Omega$
 - After environmental testing: $\leq 20\text{m}\Omega$

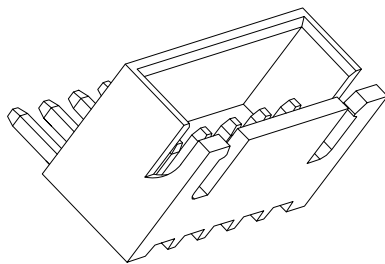


PART NO.:

X8821 W R-XX S-XX SN
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Category: W-Wafer
- ③Welding Board Angle: R-Stright 90°
- ④Row No-Pin No: XX-02P~20P
- ⑤Special No.: S-No Positioning
- ⑥Material: NO-Nylon 94V-0;
46-PA46 UL94V-0
- ⑦Planting Category: SN-Tin Plating

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	2.50	7.50	6.00	12	27.50	32.50	31.00
03	5.00	10.00	8.50	13	30.00	35.00	33.50
04	7.50	12.50	11.00	14	32.50	37.50	36.00
05	10.00	15.00	13.50	15	35.00	40.00	38.50
06	12.50	17.50	16.00	16	37.50	42.50	41.00
07	15.00	20.00	18.50	17	40.00	45.00	43.50
08	17.50	22.50	21.00	18	42.50	47.50	46.00
09	20.00	25.00	23.50	19	45.00	50.00	48.50
10	22.50	27.50	26.00	20	47.50	52.50	51.00
11	25.00	30.00	28.50				
X8821WR-XXS-NOSN			Nylon		Brass		X8821H
PART NO			Material		Material (pin)		Suitable XKB Terminal

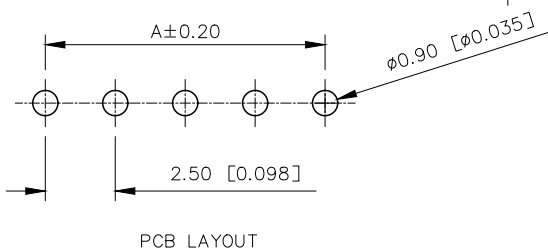

AuGLAR	$\pm 5^*$
X.	± 0.40
X.x	± 0.30
X.xx	± 0.20
X.xxx	± 0.15
UNSPECIFIED TOLERAuCES	



DESIGN	阿树	VIEW: 	MODEL TYPE: 2.50 mm Crimp Style Connectors		
CHECKED		UNIT: mm /in	PART NO.: X8821WR-XXS-NOSN		
APPROVED		SIZE: A4	DWG NO.:		
CISION CO.,LIMITED			SCALE	PAGE	REVISION
			N/A	1/1	A1