


REV. 0  
DCO 142805

COIL: @ 25°C	
RESISTANCE	39 OHMS ± 10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.9 VDC
MUST RELEASE	1.4 VDC MAX, 0.23 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES: OPERATE TIME 2.5 MS MAX.	
RELEASE TIME 4.0 MS MAX.	
CONTACT STABILIZATION TIME 2.0 MS MAX.	

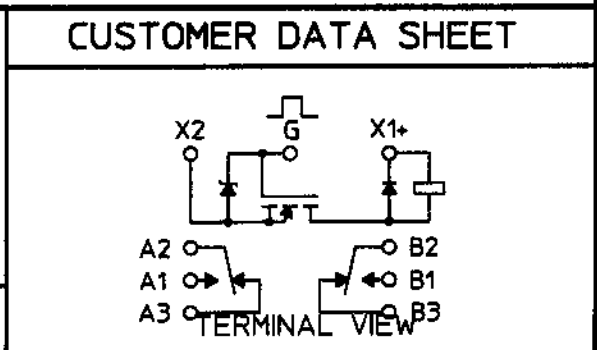

CONTACT RATING: LOW LEVEL TO 1A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 3/9/01 CK. Year C 3/9/01



CUST. _____	GPL	"JMGAT" RELAY
CUST. NO. _____	M28776/6-007M REV. _____	

JMGAT-5MW

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[JMGAT-5MW](#)