


Mechanical Specifications

D	16.0mm Max
T	5.5±0.5 mm
Lead Diameter	0.8±0.1mm
S	7.8 ±2.0mm
L	39.0±9.0 mm
Straight Leads Coating run down	5.0±2.0mm
B	7.5±0.70mm
C	2.82±0.5mm

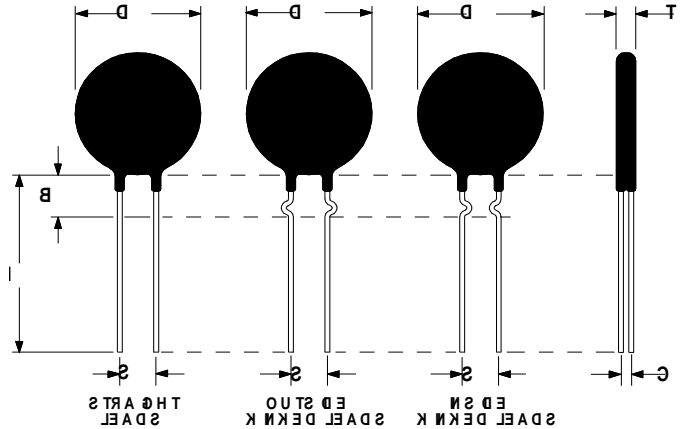

Electrical Specifications

R @25°C	220.0 Ω ±25%
Max Steady State Current (SSI) Up to 65° C	1.0 Amp
Max Instantaneous Energy	40.0 Joules
Resistance @ 100% Max Current	2.21Ω
Dissipation Constant	18 mW/°C
Thermal Time Constant	45 sec.
Body Temperature @ Max SSI	158 °C
Material Type	"L"
Max cap at 120 / 240 VAC	1700 / 425 μF

Rev:	Date:	Change:
0	7/8/03	Issue
1	5/7/11	Revise Max energy to 25 Joules
2	6/23/22	Revise mechanical dimensions

Ametherm, Inc
961 Fairview Drive
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 702 884-0670
www.Ametherm.com